



Carabao spray




ZOCON



Emily



DROMONE



euroduals



GOMET



Lanco



ANBO



STUTER



lalbutt



CONTACTS

P: 07 850 1990

PO Box 10232, Te Rapa, Hamilton 3241 • 49 Old Ruffell Rd, Te Rapa, Hamilton, New Zealand

 AgAttachmentsLimited



SHELLEY WOOD ADMINISTRATION MANAGER

P: 07 850 1990 | F: 07 850 1991 | E: info@agattach.co.nz

Shelley is married with 2 girls, enjoys catching up with family and friends, loves a good laugh and a great days fishing.



DAN MOLLOY WHOLESALE AND WAREHOUSE MANAGER

P: 07 850 1990 | M: 027 493 6647 | E: dan@agattach.co.nz

Dan enjoys farming, lifestyle block, and all things mechanical.



MARTIN GRAY NATIONAL SALES MANAGER

P: 07 850 1990 | M: 027 493 6646 | E: martin@agattach.co.nz

Martin enjoys rugby, agriculture and Waihi Beach.



BRUCE CAMPBELL SOUTH ISLAND SALES

P: 027 942 0333 | E: bruce@agattach.co.nz

Bruce enjoys gardening, time away in his caravan, ebiking or playing with his vintage tractors & machinery.



PAUL FLEMING PARTS MANAGER

P: 07 850 1990 | F: 07 850 1991 | E: parts@agattach.co.nz

Paul enjoys hunting, fishing and rugby.



ROB EICHMANN SENIOR PARTS ASSISTANT

P: 07 850 1990 | F: 07 850 1991 | E: parts@agattach.co.nz

Rob enjoys cricket, football and family time.



DAVE FERGUSON WORKSHOP

P: 07 850 1990 | F: 07 850 1991 | E: info@agattach.co.nz

Dave enjoys farming and motor racing.



GRAHAM MAISEY (OZ) SALES

P: 07 850 1990 | M: 021 228 6502 | E: graham@agattach.co.nz

Graham enjoys golf, gardening and fishing.



PAUL LEITH WORKSHOP / DESPATCH

P: 07 850 1990 | E: info@agattach.co.nz

Paul enjoys motor racing, fishing and rugby.


www.agattach.co.nz

CONTENTS

	Stoll	ProfilLine.....	6
		SolidLine.....	8
		Stoll Accessories.....	11
		Stoll Buckets and Implements.....	12
	Albutt	Forks.....	15
		Buck Rakes.....	15
		Grabs.....	15
		Scrapers.....	15
		Bucket Brush.....	15
	Anbo	Grapples.....	16
	Carrarospray	Linkage and Trailed Sprayers.....	17
		Spray Booms and Accessories.....	18
		Orchard Sprayers.....	19
	Comet	Pumps.....	20
		Geoline Accessories.....	21
	Dromone	Implements.....	23
		Hydraulic Pick-Up Hitch.....	23
	Emily	Auger and Mixing Buckets.....	24
		Sweeper.....	24
		Hay and Straw Blower.....	24
	EuroDuals	Dual Wheels.....	25
		Posilux Kits.....	25
	Tanco	Bale Slice.....	14
		Combination Slice and Shear Grab.....	14
	Tractor Weights	Blocks.....	14
	Zocon	Harrow.....	26
		Greenkeeper.....	26
		Bale Clamp.....	26
		Scraper / Sweeper.....	26
		Trailers.....	27
	Sauter	John Deere.....	 28
		Case.....	 30
		New Holland.....	 32
		Claas.....	 34
		Deutz Fahr.....	 36
	Goppel	Massey Fergusson.....	 38

SUITABLE FOR ALL REQUIREMENTS – STOLL FITS ALL

ProfiLine | SolidLine | CompactLine

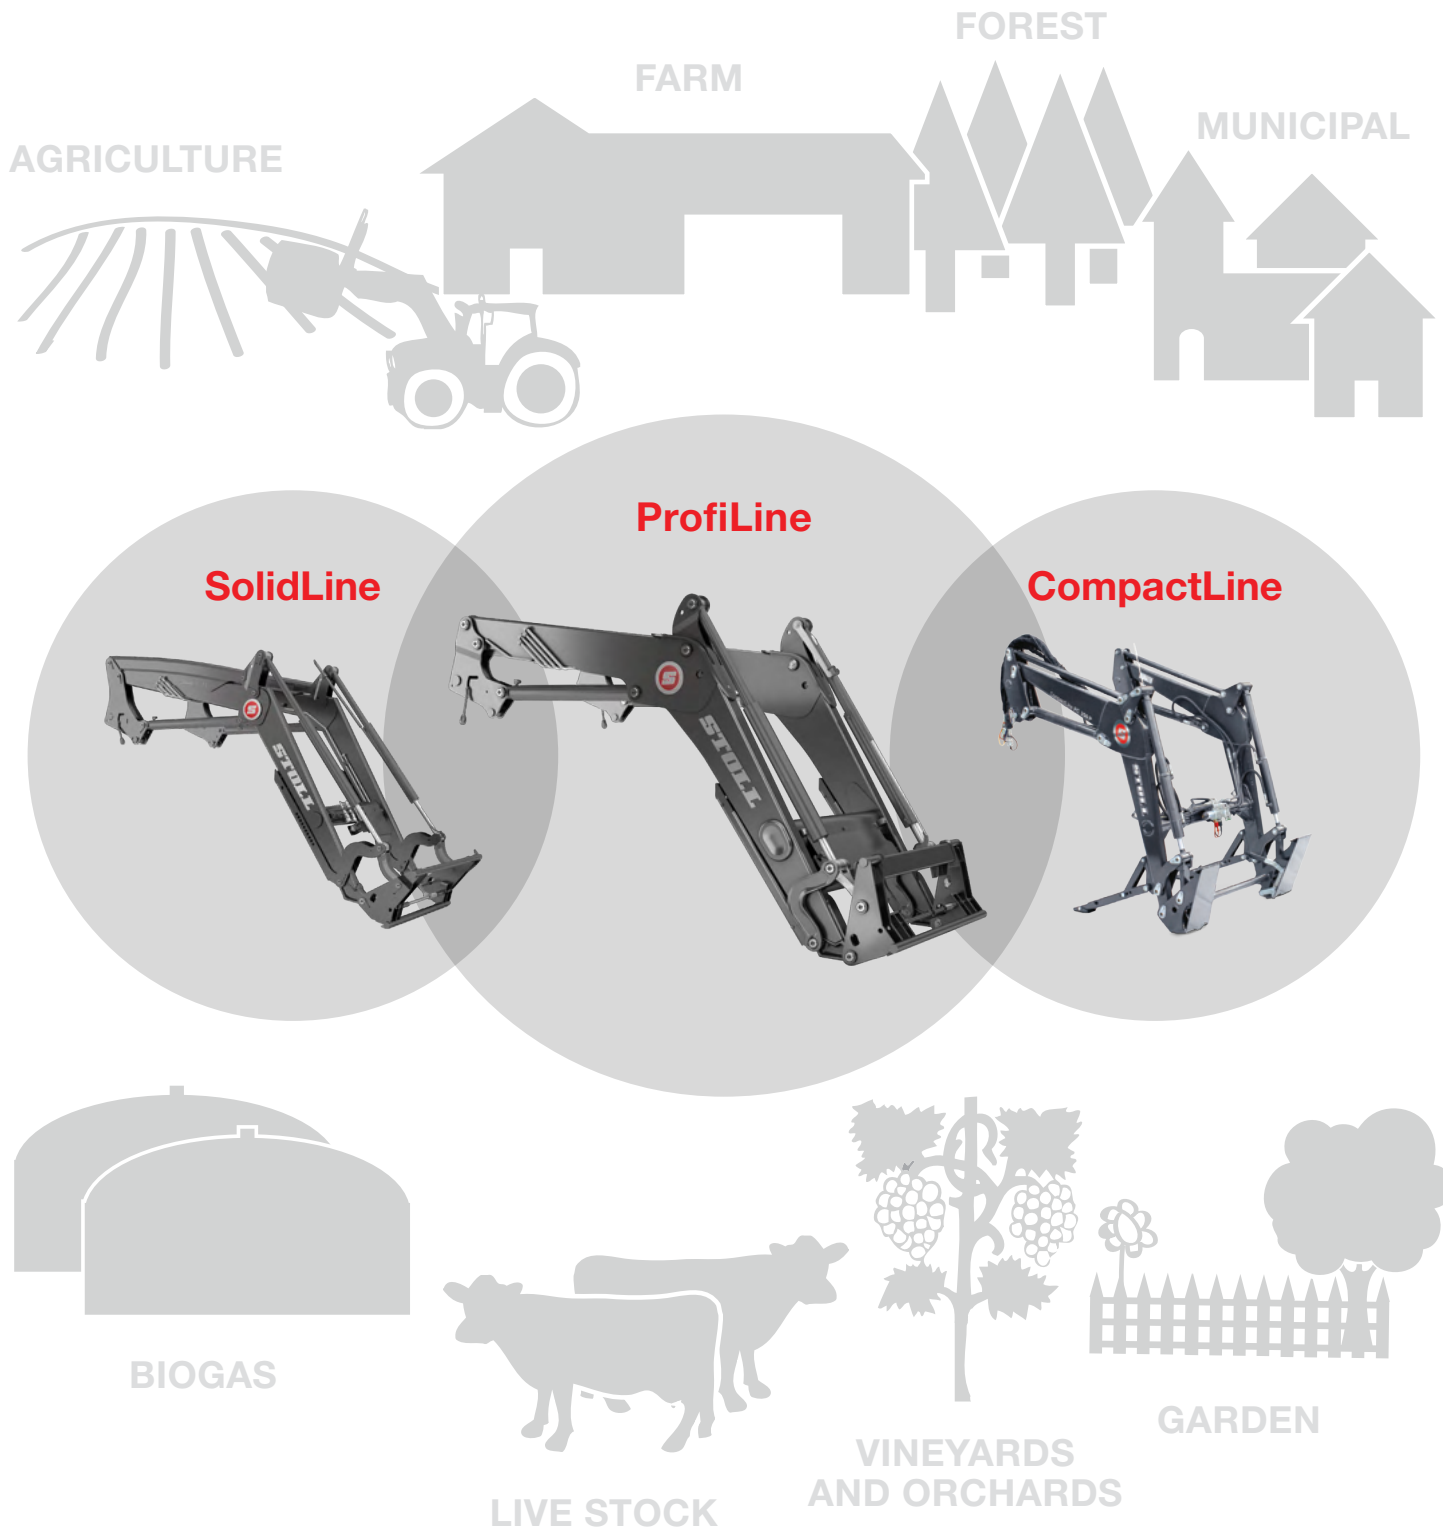

Front loaders must always be parked by using a suitable attachment.
This cannot be shown because of illustrating reasons.

TAKE ADVANTAGE OF THE BEST QUALITY

You can trust Germany's market leader:
Wilhelm Stoll Maschinenfabrik GmbH

- STOLL is the market leader for front loaders and attachments in Germany and No. 2 in the World.
- The three loader lines: ProfiLine, ClassicLine und CompactLine, fit tractors from 10 to over 300 HP.
- Farmers, Contractors and Dealers can take advantage of the widest subframe range, worldwide, to suit current tractor models and even tractors models that are more than 25 years old.
- STOLL is known for First Class Quality „Made in Germany“. STOLL offers personal contact to their dealers and end users and provides fast service for their partners.
- The traditional company was founded in 1878 by Wilhelm STOLL. Since 2013 the STOLL Group is part of DMB – Deutsche Mittelstand Beteiligungen.
- The main office and production are located in Lengede, south-east from Hannover, Germany.
- The STOLL Group employs around 500 people.
- STOLL has distributors and importers worldwide.

In 2015 we celebrated 50 years of
front loader production:

- 1965: the first front loader was built in Lengede
- 1973: production of loaders and subframes for all tractor brands
- 1983: development and implementation of the unique “drive-in” system
- 1999: Introduction of the Robust F “fine-grain steel”
- 2005: focus on front loader production to become the specialist in Lengede
- 2007: launch of ProfiLine FZ/FS
- 2009: launch of CompactLine
- 2010: launch of EcoLine
- 2015: launch of ClassicLine



PROFILINE – BY PROFESSIONALS FOR PROFESSIONALS

For Tractors between 50 and 300 HP (35-184 kW)



FZ-loader with mechanical self-leveling.
Strong solution for professionals

Larger tractors become more and more popular. Almost every 5th tractor is now over 200 HP.* STOLL always offers the right front loader solution.

High efficiency in lifting height, power and speed in connection with high quality steel reducing weight and increasing strength: The ProfiLine, made from STOLL for professionals.

- Best quality fine-grain-steel reduces the weight and increases the strength.
- Z-Kinematics and best cross bar positioning to the implement give a perfect view from the tractor cab.
- All bearings have composite bushings and can be greased from the outside.
- Easy maintenance and access to all grease points
- Semi-automatic and full hydraulic implement locking
- The safety support legs are individually adjustable without needed for tools
- Equipment features (option):
 - Return-to-Level and Quick dumping
 - Hydraulic pipes safe and secure underneath the boom
 - All electric functions can be operated even with mechanical single lever
 - Crowding angle up to 69° as standard
 - EURO quick-release frame
- Additional quick-fit-frame for several models available





FS-loader without self-leveling.
For heavy useage with a good price/performance ratio

*Source: Eilbote: 34.722 Tractors new registered. Jg. 63. Nr.4/2015. S.7.

STOLL, founded in 1878 is a German company specialising in the manufacture of high quality front end loaders and implements. Stoll loaders are built from fine grain high tensile steel, the result is a loader that is compact and light weight, perfect for today's modern farmer.




	Model Number	HP	Std Bucket metres	Lift Height mm (H)	Lift Capacity kg (Q2)	Retail Price excl GST
FS ProfiLine	<i>Double acting lift rams, non self levelling</i>					
	FS 8	50 - 90	1.50	3450	1510	\$19,300
	FS 10/10.1	60 - 100	1.70	3740	1510	\$20,000
	FS 20/20.1	70 - 110	1.70	3740	1860	\$21,000
	FS 30/30.1	80 - 120	1.90	4070	1730	\$22,400
	FS 40/40.1	90 - 140	1.90	4070	1990	\$22,800
FZ ProfiLine	<i>Double acting lift rams, mechanical self levelling</i>					
	FZ 8	50 - 90	1.50	3450	1510	\$22,300
	FZ 10/10.1	60 - 100	1.70	3740	1510	\$23,100
	FZ 20/20.1	70 - 110	1.70	3740	1860	\$23,700
	FZ 30/30.1	80 - 120	1.90	4070	1730	\$25,000
	FZ 45/45.1	90 - 140	1.90	4070	1990	\$25,500
	FZ 50/50.1	120 - 180	1.90	4260	2240	\$27,500
	FZ 60.1	150 - 230	2.05	4460	2470	\$31,300
	FZ 80.1	180 - 300	2.05	4760	2590	POA

Standard loader prices include:

Mounting kit
Joystick and control valve (Base Control)
Euro quick implement hitch
Double acting lift rams
Twin crowd rams
Third service
Standard bucket

Attention:

Please specify in your order the tractor model, year of manufacture and horse power rating.

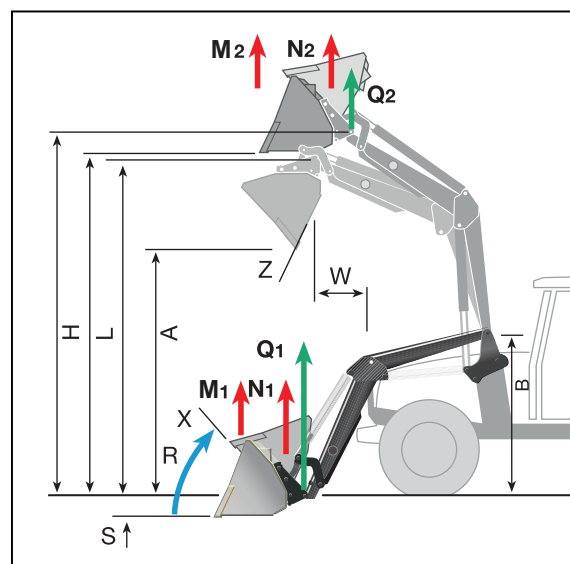

SOLID – THE POWERFUL ALL-ROUNDER

For tractors between 45 and 120 HP (35-90 kW)



Solid loader with mechanical self-leveling



Even stronger, more stable – reliable and versatile in use: The new Solid offers a STOLL for every job. The all-rounder fits on numerous tractor models and due to its wide range of tools, it is ideal for all kinds of applications.

- Best view - thanks to its sleek structure and new design
- Low tractor load because of the optimum positioning of the attachment components and low tare weight
- Reinforced pivot points for low wear and higher transmission of power
- Best tip and dumping angles with visual display for the angle of the implement
- Bushed bearings with lubrication points that are easily accessible from the outside
- Quicker to assemble and dismantle using the tried and tested STOLL drive-in system
- Dual-action lifting cylinder for a high lifting capacity
- Safe and reliable parking system with easy to use supports
- New quick-release frame with semi-automatic implement locking. Also available as a combi-frame which is compatible with other brands
- Useful additional equipment such as Comfort-Drive or 3rd control circuit



STOLL, founded in 1878 is a German company specialising in the manufacture of high quality front end loaders and implements. Stoll loaders are built from fine grain high tensile steel, the result is a loader that is compact and light weight, perfect for today's modern farmer.




	Model Number	HP	Std Bucket metres	Lift Height mm (H)	Lift Capacity kg (Q2)	Retail Price excl GST
Solid H	<i>Non self levelling</i>					
	30-16H	45 - 65	1.50	3010	1220	
	35-18H	55 - 80	1.50	3460	1270	
	38-20H	65 - 100	1.50	3760	1410	
Solid P	<i>Mechanical self levelling</i>					
	30-16P	45 - 65	1.50	3010	1220	
	35-18P	55 - 80	1.50	3460	1270	
	38-20P	65 - 100	1.50	3760	1410	
	40-22P	80 - 135	1.50	4080	1530	

Standard loader prices include:

Mounting kit
Joystick and control valve (Base Control)
Euro hitch
Double acting lift rams
Twin double acting crowdrums
Third service
Standard bucket

Attention:



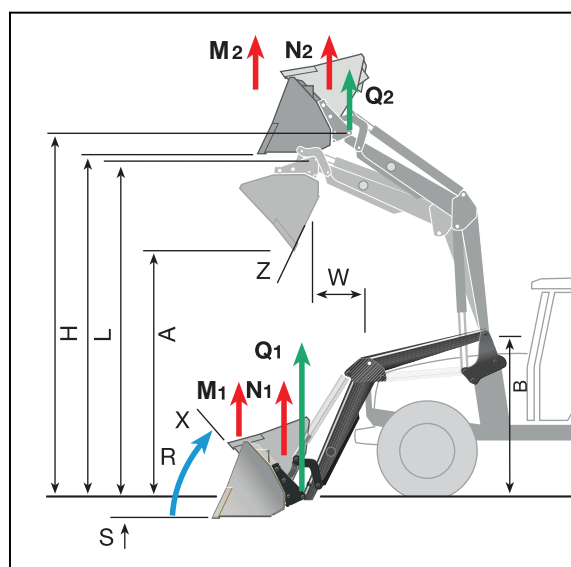

Please specify in your order tractor model, year of manufacture and horse power rating.





STOLL, founded in 1878 is a German company specialising in the manufacture of high quality front end loaders and implements. Stoll loaders are built from fine grain high tensile steel, the result is a loader that is compact and light weight, perfect for today's modern farmer.



HIGH COMFORT AND EASY HANDLING WITH STOLL-CONTROL - HYDRAULIC


	Description	Retail Price excl GST
Base Control	<i>Included in standard loader price</i>	
	<ul style="list-style-type: none"> • Accurate, safe and easy loader handling • Electric buttons integrated for additional loader functions • Five standard functions: lift, drop, dump, tip and floating <ul style="list-style-type: none"> • Lock function for road driving 	
	Base Control (fitted to tractor model)	
Pro Control		
	<ul style="list-style-type: none"> • Loader operation simple and proportional • Five standard functions: lift, drop, dump, tip and floating • Three additional functions: quick dump function, 3./4. control circuit, lock function for road driving 	
	Pro Control (ECO-Pro-System for OC, OCLS; CCLS). 5 button Joystick (STD)	
Hydraulic Hose Kit		
	<ul style="list-style-type: none"> • Use when tractor's own control units are available • Designed individually to each tractor 	
Comfort-Hydraulic		
	<ul style="list-style-type: none"> • Selector switch for the activation of front loader or rear hydraulics • Safety System, dual function of hydraulic supply is prevented - giving an either-or circuit 	

STOLL ACCESSORIES

	Description	Retail Price excl GST
Switch Kit for Base Control	<i>Dealer Fit Switch Kit</i>	
	<ul style="list-style-type: none"> • Switch Kit - Switches available for Transmission Shifting 	
4th Control circuit		
	<ul style="list-style-type: none"> • Easy handling for implements with hydraulic functions 	

STOLL, founded in 1878 is a German company specialising in the manufacture of high quality front end loaders and implements. Stoll loaders are built from fine grain high tensile steel, the result is a loader that is compact and light weight, perfect for today's modern farmer.

STOLL ACCESSORIES CONTINUED

	Description	Part Number	Retail Price excl GST
STOLL Hydro-Fix	<i>Rectangular / 4x coupling - from 02/2015</i>		
	HYDRO-FIX cpl.	3645180	
	Lift arm side only	3645190	
	Tractor side half only	3609860	
	Electric Plug Kit		
STOLL Tool Fix	<i>2-line coupling / for 3. + 4. service</i>		
	Tool-Fix cpl.	3331530	
	Lift arm side only	3474580	
	Implement side only	3617080	
STOLL Hydro-Fix	<i>6-line coupling / Doesn't fit with Single Lever Control</i>		
	HYDRO-FIX cpl. da	3614720	
	Lift arm side only		
	Tractor side half only		
Comfort-Drive			
	<ul style="list-style-type: none"> Shock absorber to give a smooth drive on the road Shock loads from uneven surfaces will be reduced <ul style="list-style-type: none"> Less stress for driver and tractor 		
	Comfort-Drive FZ / FS		
	Comfort-Drive FZ / FS Electric Shut Off		
	Comfort-Drive CL		
Hydro-Lock			
	<ul style="list-style-type: none"> Double acting implement ram Lock and unlock your Implement by switching a button <ul style="list-style-type: none"> Implement change without leaving the cabin 		
	Hydro-Lock only for FZ / FS		
Return to Level			
	<ul style="list-style-type: none"> It saves time and increases your loading capacity A sensor mounted on the parallel rod will bring your implement back to work position by pushing a button Additional quick dumping function included 		
	For ProfilLine FZ - Series from ProfilLine FZ 100		
REAL³	<i>Live third service</i>		
	<ul style="list-style-type: none"> Oil circuit for independent 3rd. function, front loader functions will not be restricted To serve full oil flow constant without restrictions (for example for an oil motor) <ul style="list-style-type: none"> Efficient use of implements 		
	Pipe Kit - Only for ProfilLine		
	Valve Kit		

STOLL, founded in 1878 is a German company specialising in the manufacture of high quality front end loaders and implements. Stoll loaders are built from fine grain high tensile steel, the result is a loader that is compact and light weight, perfect for today's modern farmer.



BUCKETS MADE OF HIGH-QUALITY MATERIALS




	Width metres	Volume Level Heap m ³	Volume Level Meas m ³	BRINELL 500 HB Cutting Edge	Weight kg	Retail Price excl. GST
Robust	Earth Buckets					
 	1.30	0.51	0.44	110 x 16	132	
	1.50	0.60	0.52	150 x 16	161	
	1.70	0.68	0.59	150 x 16	190	
	1.90	0.74	0.64	150 x 20	242	
	2.05	0.81	0.70	150 x 20	258	
	2.20	0.87	0.76	150 x 20	308	
	2.40	0.94	0.82	200 x 20	351	
	2.60	1.01	0.88	200 x 20	376	
Robust M	Maxi-Bulk Bucket					
 	2.05	1.45	1.13	150 x 16	320	
	2.20	1.56	1.22	150 x 16	384	
	2.40	1.70	1.33	200 x 20	432	
	2.60	1.86	1.45	200 x 20	462	
Bucket with Grab <i>3rd Control Circuit Required</i>	Width metres	Grasing Range	Capacity m³	Weight kg	Retail Price excl. GST	
 	1.80	1.300	1.00	550		
	2.00	1.300	1.10	615		
	2.20	1.300	1.21	640		
	2.50	1.480	1.38	750		
Combined Levelling & Grabbing Bucket (4-in-1)	Width metres	Volume Level Heap m³	Weight kg	Retail Price excl. GST		
 	1.70	0.60	350			
	1.90	0.79	400			
	2.10	0.91	433			
	3rd service required					



*Price by INDENT only


STOLL, founded in 1878 is a German company specialising in the manufacture of high quality front end loaders and implements. Stoll loaders are built from fine grain high tensile steel, the result is a loader that is compact and light weight, perfect for today's modern farmer.




STOLL IMPLEMENTS

	Grabbing Range mm big/small	Weight kg	Retail Price excl. GST
Global Wrapped Bale Handler			
	1800 / 800	160	
	For round bales with diameter of 0.80m to 1.40m 3rd service required		
Wrapped Bale Handler			
	1800 / 1000	225	
	For round bales 1.00m to 1.80m diameter / for square bales up to 1.60m 3rd service required		
Wrapped Bale Handler - Pro H			
	2050 / 650	305	
	Biggest/smallest opening 2.05m / 0.65m / effective depth 1.20m / transport width 1.35m / for wrapped square and round bales 3rd service required		

	Lifting Capacity kg	Tine mm	Weight kg	Retail Price excl. GST
Pallet Fork 1000				
	1000	1000	113	
Pallet Fork HD				
	2000	1200	199	

	Width metres	Volume m ³	Depth mm	Grabbing Range mm	Tine	Weight kg	Retail Price excl. GST
Silage Cutters Profi-Cut							
	1.28	0.87	790	856	10	500	
	1.52	1.05	790	856	13	530	
	1.88	1.28	790	856	16	730	


	Weight kg	Retail Price excl. GST
Three-Point-Linkage-Adapter		
	60	
	For EURO-attachments to use on 3pt linkage rear. Max. 1.5t load at the coupling point of the lower link	

*Price by INDENT only

Tanco, founded in Ireland in the 1960's produce a large range of Bale Wrapping and Bale Feeding implements.

Ag Attachments only import and distribute the Tanco bale slice and the bale shear implements, not the wrapping machines.



Implement		Width metres	Length metres	Height closed	Height opened	Weight kg	Retail Price excl GST
I73	<i>Slice and retain plastic for bales up to 1.5m in diameter (Includes Euro Plates)</i>						
		1.82	1.05	0.85	1.73	450	
I75	<i>Combination Bale - Shear and Silage Cutter (Includes Euro Plates)</i>						
		2.00	1.30	0.90	1.75	620	

Tanco Bale Shears:

Splits round bales while retaining the plastic and net

Feed directly on feed passage or feeders

Directly split and feeds bale into diet feeder

Euro plates as standard for the I73 and I75 Tanco products



TRACTOR WEIGHT BLOCKS



600kg, 850kg, 900kg

CAST weight blocks

Available in Green or Grey

CAT 2/3

600kg can clip onto

850/900kg weights

*other sizes available on indent

Description	Retail Price excl GST
600kg Tractor Weight, linkage & clip on	
850kg Tractor Weight, linkage GREY	
900kg Tractor Weight, linkage GREEN	

Albutt is a wholly owned family business, manufacturing equipment for the agricultural, construction and waste handling industries throughout Europe and the World. We specialise in the design, development and manufacture of attachments for materials handling. We now employ the latest design and manufacturing technology to produce quality equipment to meet today's market needs.



Implement	Part Number	Width metres	Capacity m³	No. tines	Weight kg	Retail Price excl GST
Grass Fork	Hardox Tine					
	B916HX (Folding)	3.60 - 4.88	9.30	18	1820	
	B914HX (Folding)	3.05 - 4.27	8.00	16	1690	
	B710HX (Rigid)	3.05	4.60	12	1080	
Heavy Duty Buck Rake	(Recommended for tractors 160HP and above) Hardox Tine					
	B810PPHX	3.05	5.66	12	1350	
	B809PPHX	2.74	5.09	11	1300	
	B808PPHX	2.44	4.53	10	1250	
Buck Rake	(2 pair of side tine included) Forged Tine					
	B810PP	3.05	4.41	18	1060	
	B809PP	2.74	3.96	16	1020	
	B808PP	2.44	3.53	15	980	
Heavy Duty Twin Ram Power Grab	(Suitable for tractor loaders) Hardox Tine - Open grab measurement 1.060mm					
	E380HXG	1.80	0.90	9F 5G	350	
	E410HXG	2.13	1.07	10F 6G	400	
Shear Grab	Hardox Tine					
	S220HX	2.20	1.15	16	800	
	S190HX	1.90	1.00	14	750	
	S160HX	1.60	0.85	12	460	
Silage Fork	(Galvanised Frame)					
	EGV 160	1.60	0.80	8 X 810 mm	190	
	EGV 180	1.80	1.00	10 X 810 mm	210	
Telehandler Buckets	C/W weld on hooks					
	A043-80	2.44	1.22	-	380	
	A056-80	2.44	1.6	-	426	
	A075-80HD	2.44	2.14	-	735	
Telehandler Bucket Grab						
	A059-80BGHX	2.44	1.64	-	810	
Heavy Duty Yard Scraper (To suit loaders and telehandlers)		Adjustable to 3 positions		Blade		
	YS50	2.20 - 3.10 metres		50mm	480	
Bucket Brush (Can fit any type of bucket)		Width range or bucket size				
	SB60	1980mm - 2210mm				

*Price by INDENT only





Other models available. For a comprehensive range see www.albutt.co.uk

Hardox is considered to be a minimum of 3 times harder than a forged tine. See: www.hardox.com

Anbo are a North American manufacturer of high quality grapples, blades and ploughs. Anbo makes use of high carbon steel (AR400) in all products which enables the grapples to safely handle rocks, trees and root rake effectively.



AR400 steel has a yield strength of 155,000 PSI and is typically used in digger buckets.
(Includes Euro hooks, deduct \$250 + GST without hooks)

Implement	Size Imperial	Size Metric	Opening cm	Weight kg	Tines mm	Tine Space mm	Hyd Cyl mm	Retail Price excl GST
GRS	<i>Standard Series</i>							
	6'	1.80	130	354	13	150	76 X 203	
	7'	2.10	130	418	13	150	76 X 203	
GRSH	<i>Standard Heavy Duty Series</i>							
	6'	1.80	130	457	16	150	76 X 203	
	7'	2.10	130	523	16	150	76 X 203	
GRX	<i>Extreme Series</i>							
	7'	2.10	165	623	16	150	76 X 254	
	8'	2.40	165	668	16	150	76 X 254	
	9'	2.70	165	750	16	150	76 X 254	
GRHX	<i>Extreme Heavy Series</i>							
	8'	2.40	165	905	25	150	89 X 254	
	9'	2.70	165	1000	25	150	89 X 254	
Euro Hooks		1334090NZ		Weld on Euro Hooks				



Other models available. For a comprehensive range see www.anbomanufacturing.com
Anbo Grapples don't need Tine bracing. These are ideal for root raking.

CARRAROSPRAY LINKAGE AND TRAILED SPRAYERS

STANDARD FEATURES

TANK	Rotationally moulded polyethylene	CONTROL	4 tap manual or 3 - 5 tap proportional electric control with dump
FRAME	Robust galvanised modular frame	HANDWASH TANK	Included
PUMP	Fitted with appropriate Comet diaphragm pump. 20 - 50 bar	FILTER	Basket and suction filter included
LINK	Pins Category 1 and 2 where applicable	DRIVESHAFT	Included with all units

Implement	Model Number	Tank litres	Pump	Description	Retail Price excl GST
Manual Control					
	SP-G-C200	200 (including frame)	APS41 40 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	
	SP-G-C400	435 (including frame)	APS41 40 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	
	SP-G-C600	650 (including frame)	APS41 40 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	
	SP-G-C800	850 (including frame)	APS71 71 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	
	SP-G-C1000	1000 (including frame)	APS71 71 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	
Electric Control					
	U78080019B	850 (including frame)	Comet BP125 pump 121 lpm @ 20 bar	3 Tap Electric Proportional Control, Handwash, Venturi Fitting and Step	
	SP-GDLH1000	1000 (including frame)	Comet BP125 pump 121 lpm @ 20 bar	3 Tap Electric Proportional Control, Handwash, Venturi Fitting and Step	
	SP-GDLH1200	1200 (including frame)	Comet BP121 pump 121 lpm @ 20 bar	5 Tap Electric Proportional Control, Handwash, Venturi Fitting, 125L Flush Tank and Step	
	U82200012B	2000 (including frame)	Comet BP125 pump 121 lpm @ 20 bar	15.3" Flotation Wheels (Other Options Available) Adjust Axle Height, Adjustable Draw Bar, 135L Flush Tank, 3 Section, Electric Proportional Control and Step	

Pictured above with optional boom.

*Price by INDENT only

Add booms, hose reels and foam markers to suit. Other linkage and trailed options available on request.
For a comprehensive range see www.carrarospray.com

CARRAROSPRAY SPRAY BOOMS AND ACCESSORIES

STANDARD FEATURES



- Manual and hydraulic fold hot dipped galvanised
- All booms have full nozzle protection and safety break back
- 03 air induction nozzles are standard (other options available)
- Nova and work booms are self levelling
- All booms have stainless steel boom tubes and non drip nozzle bodies

Implement	Model Number	Description	Weight kg	Retail Price excl GST
Manual Spray Booms				
	ETB14N	4m Heavy Duty Manual Fold Boom with No Nozzle Protection	20	
	SP-BD560	6m Heavy Duty Manual Fold Boom with Full Nozzle Protection	32	
	SP-BD80	8m Heavy Duty Manual Fold Boom with Full Nozzle Protection	42	
	SP-BD100	10m Heavy Duty Manual Fold Boom with Full Nozzle Protection	48	
	U69130093	Nova 12m Heavy Duty Manual Fold Boom, with Full Nozzle Protection	104	
Hydraulic Spray Booms				
	SP-BDI180N	Work 8m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	140	
	SP-BDI100N	Work 10m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	150	
	SP-BDI120N	Work 12m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	211	
	SP-BDIH150	Work 15m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	260	
	SP-BDIH120N	Hydraulic Height Mast, 1m Travel. Hose Kit for Height Mast above. (Price included in height mast)	-	
		Hydraulic suspension for Height Mast	-	
Accessories				
	SP-8394014	Double Sided Foam Marker Kit		
	SP-30MHRG	30m Heavy Duty Hose Reel and Gun		
	SP-50MHRG	50m Heavy Duty Hose Reel and Gun		
	SP-100MHRG	100m Heavy Duty Hose Reel and Gun		
	SP-8214007	Bare Heavy Duty Hose Reel		
	SP-8282014	Triam Spray Gun		
	SP-06632642	10ml 600PSI Gun Hose per 100m Roll		
	SP-06632642 - cm	10ml 600PSI Gun Hose per metre		
	SP-06632659	13ml 600PSI Gun Hose per 100m Roll		
	SP-06632659 - cm	13ml 600PSI Gun Hose per metre		

CARRAROSPRAY ORCHARD SPRAYERS

STANDARD FEATURES

TANK	Rotationally moulded polyethylene	CONTROL	Manual or 2 section electric
FRAME	Robust galvanised modular frame	HANDWASH TANK	Included
PUMP	Fitted with appropriate Comet diaphragm pump. 50 bar	FLUSH TANK	Included
LINK	Pins Category 1 and 2 where applicable	FILTER	Basket and suction filter included
		DRIVESHAFT	Included with all units

Implement	Model Number	Tank litres	Pump	Description	Retail Price excl GST
Electric Control					
	APL400 Air Blast 700m fan	400	APS51 51 lpm @ 50 bar	400L linkage Air Blast Sprayer. Comet ARS51 pump, manual control. Hand wash and flush tank. 700m fan 1 speed gearbox with neutral	
	APL600 Air Blast 700m fan	600	APS96 96 lpm @ 50 bar	600L linkage Air Blast Sprayer. Comet ARS96 pump, 2 section electric controls. Hand wash and flush tank. 700m fan with single nozzle body	
 OPTIONAL Y003150	APL2000 Air Blast 900m fan	2000	APS145 141 lpm @ 50 bar	2000L trailed Air Blast Sprayer. Comet ARS145 pump, 2 section electric controls. CV Shaft. 2 speed gearbox. Hand wash and flush tank. 15.3" wheels. 900m fan with adjustable vanes	



Add booms, hose reels and foam markers to suit. Other linkage and trailed options available on request.
For a comprehensive range see www.carrarospray.com

Comet Pumps are manufactured in Italy out of corrosion resistant materials and are sold in over 70 countries world wide.



- Self Priming
- Run dry compatibility
- Oil viewer

- Wide range of controls and accessories
- Suit boom, hand gun and orchard applications
- 20, 40 and 50 bar models

Implement	Model Number	Part Number	Description	Retail Price excl GST
Comet Pumps				
 APS41  APS71  APS96  BP125  BP125  BP171  BP235  BP281K  MC20/20  P48	Comet APS41 40 lpm @ 40 bar	SP-6114000100	-	
	Comet APS71 70 lpm @ 40 bar	SP-6092001900	-	
	Comet APS96 94 lpm @ 50 bar	SP-6093001300	-	
	Comet BP125 121 lpm @ 20 bar	SP-6100000100	C/W Six Spline	
	Comet BP125 121 lpm @ 20 bar	SP-610000200	C/W 30ml Keyed Shaft	
	Comet BP171 162 lpm @ 20 bar	SP-6109000200	C/W Six Spline Thru Shaft	
	Comet BP281K 265 lpm @ 20 bar	SP-6134000200	C/W Six Spline Thru Shaft	
	Comet MC20/20 23 lpm @ 20 bar	SP-73000927	C/W 50cc Cleonac, 2 Tap Control	
	Comet P48 52 lpm @ 30 bar	SP-60060025	C/W Six Spline	
Comet Pump and Geoline Accessories				
	SP-50020008	PTO Adapter Kit to fit BP Series Pump		
	SP-50020003	PTO Adapter Kit to fit Pad APS Series Pump		
	SP-50030007	Male Six Spline Shaft to fit Pad APS Series Pump		
	SP-50030014	30ml Shaft to fit Pad APS Series Pump		
	SP-50050216	6-1 Gearbox P and APS Pumps 4HP and 5.5HP Honda		
	SP-50050221	6-1 Gearbox P and APS Pumps 9HP and 11HP Honda		
	SP-50050226	6-1 Gearbox BP125 30ml Shaft 6.5HP Honda		
	SP-1204057500	4 Tap Control, 40 bar		
	SP-12040205	3 Tap Control, 40 bar, Suit P and APS Series		
	SP-12040457	2 Tap Control, 40 lpm, Suit APS41		
	SP-50040005	Remote Kit for Control to suit BP, P, APS		
	SP-4020009039	Tecomec Stainless Spraylance C/W Adjustable Nozzle 15 bar		





For a comprehensive range see www.comet-spa.com

Comet Pumps are manufactured in Italy out of corrosion resistant materials and are sold in over 70 countries world wide.






Comet Pumps are manufactured in Italy out of corrosion resistant materials and are sold in over 70 countries world wide.




Implement	Part Number	Description	Retail Price excl GST
Comet Pump and Geoline Accessories	<i>Continued</i>		
 <p>Choose by colour or size</p>	-	Air Induction Nozzles	
	-	Flat FAN 80° and 110° Nozzles	
	-	Packet of 24 Flat FAN 80° and 110° Nozzles	
	-	Low Drift Nozzles	
	-	AVI Ceramic Albuy Nozzles	
	-	Hollow Core Ceramic for Orchard	
	-	Packet of 10 Hollow Core Ceramic for Orchard	
	SP-8234005A	Single Nozzle Body 7mm Insert	
	SP-8234003	Single Nozzle Body 10mm Insert	
	SP-8239001	Triple Nozzle Body 7mm Insert	
	SP-8239003A	Triple Nozzle Body 10mm Insert	
	SP-8253000 (SP-G00002020)	Cap to fit Nozzle Body C/W Washer	
	SP-8253040 (SP-G00002020)	Blank Cap to fit Nozzle Body C/W Washer	
	SP-8302251	Gauge 0-580PSI Isometric Bottom Entry - 63mm	
	SP-8302200	Rear Gauge 0-360PSI Isometric Entry - 63mm	
	SP-8302250	Bottom Gauge 0-360PSI Isometric Entry - 63mm	
	SP-1816/0079F	Gauge 0-360PSI Isometric Bottom Entry - 100mm	
	SP-1816/0080F	Gauge 0-870PSI Isometric Bottom Entry - 100mm	
	SP-50260245 SP-UA0101997R	Service Kit Comet APS41	
	SP-50260085 SP-UA0101973R	Service Kit Comet APS71	
	SP-50260326 SP-UA0102002R	Service Kit Comet BP125	
	SP-50260145 SP-UA0101988R	Service Kit Comet BP171	
	SP-50260232	Service Kit Comet BP280	
	SP-5026007900	Service Kit P48	

For a comprehensive range see www.comet-spa.com

Dromone hitches are manufactured in Ireland and are considered to be the strongest and safest hitches on the market - this is because they are mounted directly to the tractor back end which utilises the weight of the tractor to aid stability.

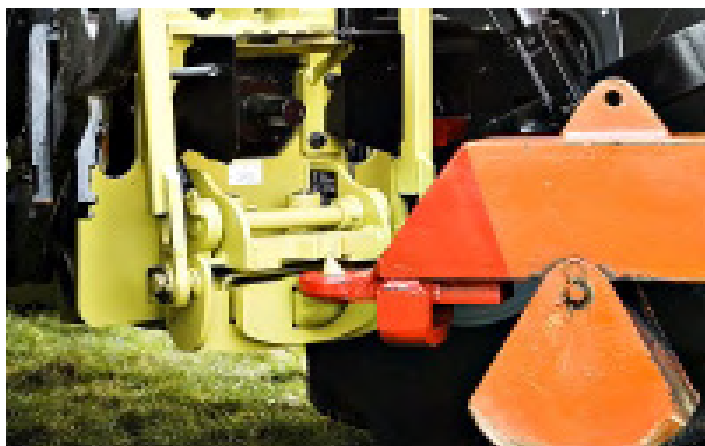

Implement	Description	Retail Price excl GST
Dromone Hydraulic Push Back Hitch		
	Hydraulic rear hitches available for Case, Claas, Fendt, John Deere, Massey Ferguson, McCormick, New Holland, Same, Deutz Fahr and vertical hitches for Telehandlers	
	Tractors with 0HP - 140HP	
	Tractors with 141HP - 170HP	
	Tractors with 171+ HP	
	Vertical Hitch for Telehandler	
Please Note: Some tractor models require a replacement lift arm. This is not included in the above price. Please enquire for further details.		
Pallet Forks		
	2000kg lift capacity. Ratchet lateral fork width adjustment, complete with euro hitch. Range of pallet forks to suit machines from 6 to 32 tonnes. The Pallet Fork gives your loader all the material handling capability of a telehandler.	
Ball and Spoon		
	90% less wear and hitch damage compared to using traditional towing rings, reducing your operating costs. The Dromone Ball and Spoon Coupling offers you the quietest towing experience when compared to conventional hook and ring systems. All tractor makes and models catered for.	




Other models available. For a comprehensive range see www.dromone.com

For 40 years Emily has been a major manufacturer on the European market specialising in auger buckets, sweepers and concrete mixers for the agricultural industry and construction.



Implement	Part Number	Width metres	Capacity m ³	Weight kg	Retail Price excl GST
Auger Bucket					
	Discharge of food - *Beet/Vegetable Chopper Model				
	GAVV1220	2.20	1.30	510	
	GAVV2240	2.40	1.90	741	
	GAVV1220RC*	2.20	1.30	-	
	Options Additional add-ons				
	EMI2VC	Left or right discharge			
	GAVGOUL	Extension Shute			
	EMIFIXD	Bolted brackets for front loaders and telehandlers			
	ROTO FOR BUCKET	Including 2 rams			
	HYDRAULIC GRAB	Including 2 rams			
Oriental Sweeper					
Fits to rear linkage					
 	BALOR200	2.00	4.41	210	
	BALBACOR	Collector Box 270 litre			
	BALDEFLAPOR	Anti projection deflector			
	SIGMA Straw and Hay Blower	270° hydraulic discharge. Round or square bales. Hydraulic walking floor feed. 2 speed gearbox. Hay, straw or day/dry silage			

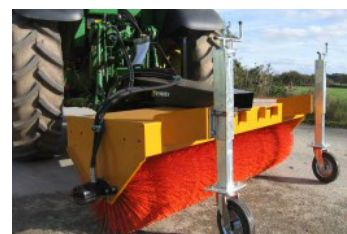

Other models available. For a comprehensive range see www.emily.fr

Engineered in Switzerland for over 30 years. Fewer and shorter clamps required per wheel.
Accurate adjustment while clamp still in position. Tractor transmits power through the rim and not the clamp. Precision calibrated spacers, for better balance and high speed.

Implement



Tractor Wheel	Dual Size
<i>Price for duals will be quoted on enquiry and will include tyres, painted rims, clamps and freight. Other sizes and configurations are available on request.</i>	
710/65R42	320/90R54
710/70R38	-
650/65R42	300/95R52
580/70R42	420/80R46
520/85R42	20.8R42
20.8R42	-
650/65R38	13.6R48
580/70R38	14.9R46
520/85R38	20.8R38
20.8R38	-
600/65R38	12.4R46
520/70R38	18.4R38
460/85R38	-
18.4R38	-
540/65R38	11.2R46
480/70R38	16.9R38
420/85R38	-
16.9R38	-
520/70R34	11.2R44
460/85R34	14.9R38
18.4R34	18.4R34

Clamp Options



Description	Part Number	Retail Price excl GST
MD4-Plus Box M16x1.5 Clamp Set	495569	
MD6-Plus Box M16x1.5 Clamp Set	495583	
HD4-Plus Box M18x1.5 Clamp Set	495958	



Posilux







Posilux. Positioning overwidth light kits (including double sided hazard panels)	1701010	
--	---------	--

Zocon Hydraulic Harrows, Greenkeepers, Tip Trailers and Yard Scrapers are manufactured in the Netherlands using High Quality European steel and are exported to over 40 countries world wide.



Implement	Part Number	Description	Width metres	Weight kg	Retail Price excl GST
Grassland Harrow	Corner security - D Shackle for quick changing of nets - Mechanical blockage of cylinders Skids - Linkage Cat. 2 suitable for catch hooks - Transport Width 231cm - 4 rows Heavy, cast-iron elements can be used from both sides - Galvanised Frame				
	Z01-0011	Hydraulic	5	635	
	Z01-0012	Hydraulic	6	715	
	Z01-0013	Hydraulic	8	835	
	Accessories				
	Seeder	Electronic Driven, Pneumatic Seeder, Capacity 300L, Includes Control Box with dosage by Radar			
Greenkeeper	Galvanized frame - 10 mm teeth (3 rows) - 12-stage depth adjustment - Skids 2 Cylinders with transport lock - Very heavy linkage Cat. 2 suitable for catch hooks				
	Z01-0022	Hydraulic	6	575	
	-	Hydraulic	8	750 (indent)	
	Accessories				
	Seeder (incl. assembly)	Electronic Driven, Pneumatic Seeder, Capacity 300L, Includes Control Box with dosage by Radar			
	Seeder 450 Litre	Electronic Driven, Pneumatic Seeder, Capacity 300L, Includes Control Box with dosage by Radar			
	Mounting Kit	Mounting kit for Greenkeeper or Harrow, includes steps			

Implement	Weight kg	Description	Retail Price excl GST
Bale Clamp	<i>Euro Brackets</i>		
	300	Clamp completely galvanized - Suitable for bales from 70cm to 245cm - Linkage of choice, mounted with bolts - 2 Cylinders	
	-	Optional 550mm extension	
	-	Bolt on JCBQ hooks in lieu of Euro - add	
Modular Rubber Scraper			
	RS-S270	2.7m adjustable width - Euro and 3 point linkage hitch - Steel reinforced rubber replaceable blade - European galvanised steel - Other sizes available at Indent	
	RS-S300	3m adjustable width - Euro and 3 point linkage hitch - Steel reinforced rubber replaceable blade - European galvanised steel	
	1.95m	3 Point heavy duty hydraulic drive sweeper mechanical width adjustment, nylon 600mm brush 300mm pneumatic wheels	
	2.4m		

For a comprehensive range see www.zocon.eu

Zocon Hydraulic Harrows, Greenkeepers, Tip Trailers and Yard Scrapers are manufactured in the Netherlands using High Quality European steel and are exported to over 40 countries world wide.



Implement

Tipping Trailer



Product Code	Size tonnes	Max Weight kg	Loading Capacity kg	Bucket Dimension cm	Weight Tipping Trailer kg	Power Demand HP	Height Loading Platform cm	Tipping Angle	Retail Price excl. GST
Z045	4.5	5700	4500	340 x 180 x 40	1200	45 - 75	96	50°	
BASIC EQUIPMENT: Self closing backdoor - Automatic lock system backdoor - Removable side boards - Lighting - Support wheel Turnable hitch ø 45 - Under and upper drawbar - Frame + side boards galvanized - Tipping system 1 side - Thickness bottom: 4mm Thickness sideboards: 2mm									
Z080	8	10,300	8000	450 x 220 x 60	2300	60	106	50°	
BASIC EQUIPMENT: Automatic, hydraulic locksystem backdoor - Mechanical locksystem sideboards - Lighting - Support Turnable hitch ø 45 - One side tipping (backwards) - Tandem (bogie), Tyres: 11.5/80x15 - Under and upper drawbar Upper- under frame and load platform galvanized - Removable side boards - Thickness bottom: 4mm - Thickness sideboards: 2mm									
Z100	10	12,700	10,000	450 x 220 x 60	2700	80	106	50°	
BASIC EQUIPMENT: Automatic, hydraulic locksystem backdoor - Lighting - Support - Turnable hitch ø 50 - One side tipping (backwards) Tandem (bogie, parabolic suspension), Tyres: 15/55x17 - Under and upper drawbar - Upper- under frame and load platform galvanized Removable side boards - Thickness bottom: 4mm - Thickness sideboards: 2mm									



For a comprehensive range see www.zocon.eu









Sauter specialise in the manufacture of Front Linkage and PTO systems to fit:
John Deere, Case IH, New Holland, Claas and Deutz Fahr tractors.

Attention: Please specify in your order tractor model, year of manufacture, with/without front suspension, with/without front end loader.



JOHN DEERE





	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
5055E - 5075E / 5080G - 5090G / 5080GH - 5090GH							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	50kW / 68HP		
Complete							
5080G - 5090G / 5080GH - 5090GH (MY14)							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	50kW / 68HP		
Complete							
5075 - 5085 - 5100 GF/GN/GV (MY17)							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	50kW / 68HP		
Complete							
5075GL - 5085GL (MY17)							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	50kW / 68HP		
Complete							
5075M - 5115M (MY18)							
Linkage	2500	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
5090R - 5125R							
Linkage	2800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	50kW / 68HP		
Complete							
6090 - 6110RC and MC (4i) / 6105 - 6125R and M (4i) / 6110 - 6130R and M (4f)							
Linkage	3500	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
6130 - 6170R and M (4i) / 6190 - 6210R (4i) / 6135 - 6195R and M (4f)							
Linkage	4500	Double	Cat.3-2	-	-		
PTO HZ	124mm below crankshaft			1000	110kW / 150HP		
PTO TA*	186mm below crankshaft			1000	110kW / 150HP		
PTO HW*	(with cooler) 246mm below crankshaft			1000	125kW / 170HP		
Complete HZ							
Complete TA							
Complete HW							
	*Recommended for wheel size 30" rims for PTO output shaft position						

For a comprehensive range see www.sauter-stetten.com

Sauter specialise in the manufacture of Front Linkage and PTO systems to fit:
John Deere, Case IH, New Holland, Claas and Deutz Fahr tractors.

Attention: Please specify in your order tractor model, year of manufacture, with/without front suspension, with/without front end loader.



	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
6215R							
Linkage	4500	Double	Cat.3-2	-	-		
PTO	(with cooler)			1000	125kW / 170HP		
Complete							
7200R - 7280R / 7210R - 7310R (MY14) 7RMY20							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	(with cooler)			1000	110kW / 150HP		
Complete							
8225R - 8345R Tier 3 / 8235R - 8360R T4i / 8270R - 8370R (MY14) 8RMY20 (No PTO Option)							
Linkage with ILS	5000	Double	Cat.3-2	-	-	-	
Linkage without ILS	-	-	-	-	-		

Accessories	Retail Price excl GST
Sauter Tractor Triangle (A Frame)	
Double Acting Front Remote Kit - JD 5000 / 6000	
Double Acting Front Remote Kit - JD 7000 / 8000	






Perfection down to the smallest detail



Sauter specialise in the manufacture of Front Linkage and PTO systems to fit:
John Deere, Case IH, New Holland, Claas and Deutz Fahr tractors.

Attention: Please specify in your order tractor model, year of manufacture, with/without front suspension, with/without front end loader.



	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
FARMALL C with preparation of front axle support							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
FARMALL U							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
MAXXUM 110 - 140 / PUMA SWB							
Linkage	3800	Double	Cat.2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
PUMA LWB							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
Side rails to clutch housing - recommended for buckrake or blade							
OPTUM							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							

Accessories	Retail Price excl GST
Sauter Tractor Triangle (A Frame)	
Double Acting Front Remote Kit - Farmall / Maxxum / Puma SWB	
Double Acting Front Remote Kit - Puma LWB / Optum	

For a comprehensive range see www.sauter-stetten.com






Perfection down to the smallest detail



Sauter specialise in the manufacture of Front Linkage and PTO systems to fit:
John Deere, Case IH, New Holland, Claas and Deutz Fahr tractors.

Attention: Please specify in your order tractor model, year of manufacture, with/without front suspension, with/without front end loader.




	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
T4 with preparation for front axle support							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
T5							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
T6 / T7 SWB							
Linkage	3800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
T7 LWB							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
Side rails to clutch housing - recommended for buckrake or blade							
T7.290 - T7.315 Heavy Duty							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							

Accessories	Retail Price excl GST
Sauter Tractor Triangle (A Frame)	
Double Acting Front Remote Kit - T5 / T6 / T7 SWB	
Double Acting Front Remote Kit - T7 LWB / T7 Heavy Duty	

For a comprehensive range see www.sauter-stetten.com

Perfection down to the smallest detail









Sauter specialise in the manufacture of Front Linkage and PTO systems to fit:
John Deere, Case IH, New Holland, Claas and Deutz Fahr tractors.

Attention: Please specify in your order tractor model, year of manufacture, with/without front suspension, with/without front end loader.




CLAAS

	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
NEXOS 210 - 240 F/VL/VE (A25, A26, A27) / 220FB - 230FB (A29)							
Linkage	2500	Double	Cat.2	-	-		
PTO	-	-	-	1000	50kW / 68HP		
Complete							
ARION 410 - 430 (A21) / 410 - 460 T4f(A32, A43)							
Linkage	2800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
ARION 530 - 550 (A18) / 530 - 550 T4i (A34, A35) / 510 - 550 T4f (A74, A75)							
Linkage	3800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
ARION 610 - 640 (A19) / 620 - 650 T4i (A36, A37) / 610 - 650 T4f (A76, A77)							
Linkage	3800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
AXION 810 - 850 (A09, A30)							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	125kW / 170HP		
Complete							
AXION 810 - 850 T4f (A40, A41)							
Linkage	6000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	125kW / 170HP		
Complete							

Accessories	Retail Price excl GST
Sauter Tractor Triangle (A Frame)	
Double Acting Front Remote Kit - NEXOS / ARION 400/500/600	
Double Acting Front Remote Kit - AXION 800	

For a comprehensive range see www.sauter-stetten.com



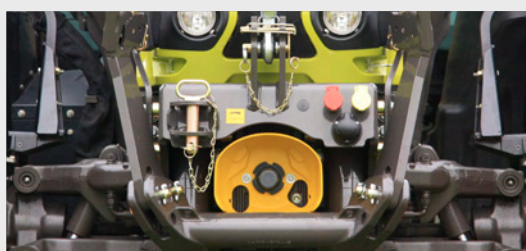




Perfection down to the smallest detail



Sauter specialise in the manufacture of Front Linkage and PTO systems to fit:
John Deere, Case IH, New Holland, Claas and Deutz Fahr tractors.

Attention: Please specify in your order tractor model, year of manufacture, with/without front suspension, with/without front end loader.



	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
Series 5 5090 - 5130 / C / TTV							
Linkage	2100	Double	Cat.2	-	-		
PTO	-	-	-	1000	74kW / 100HP		
Complete							
AGROTRON M600 - M620 6G							
Linkage	3800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
Series 6 6120.4 - 6160.4 / TTV							
Linkage	3800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
Series 6 6140 - 6210 / TTV							
Linkage	3800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
Series 6 T4f 6135.4 - 6175.4 / TTV / 6145 - 6175 / TTV							
Linkage	4000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
Series 6 T4f 6185 - 6215 / TTV							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
Series 7 T4f 7230 - 7250 / TTV							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							

Accessories	Retail Price excl GST
Sauter Tractor Triangle (A Frame)	
Double Acting Front Remote Kit - Series 5 / 6 / 7	
Double Acting Front Remote Kit - AGROTRON M	

For a comprehensive range see www.sauter-stetten.com

Perfection down to the smallest detail








Goppel specialise in the manufacture of Front Linkage and PTO systems to fit:
Massey Ferguson tractors.

Attention: Please specify in your order tractor model, year of manufacture, with/without front suspension,
with/without front end loader.






MASSEY FERGUSON

	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
MF 3630 - 3660 F/S/V							
Linkage	2200	Single	Cat.2	-	-		
PTO	-	-	-	1000	55kW / 75HP		
Complete							
MF 5611 - 5613 / 5710 - 5713SL							
Linkage	2500	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
MF 6612 - 6616 / 6713 - 6718							
Linkage	3800	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	110kW / 150HP		
Complete							
MF 7614 - 7626 / 7714 - 7726							
Linkage	4000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	100kW / 150HP		
Complete							
MF 8650 - 8690 / 8727 - 8737							
Linkage	5000	Double	Cat.3-2	-	-		
PTO	-	-	-	1000	125kW / 170HP		
Complete							

Accessories	Retail Price excl GST
Sauter Tractor Triangle (A Frame)	
Double Acting Front Remote Kit - MF 3000 / 5000 / 6000 / 7000	
Double Acting Front Remote Kit - MF 8000	

Perfection down to the smallest detail

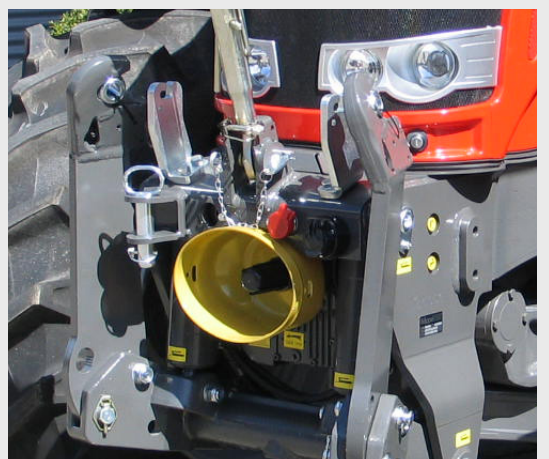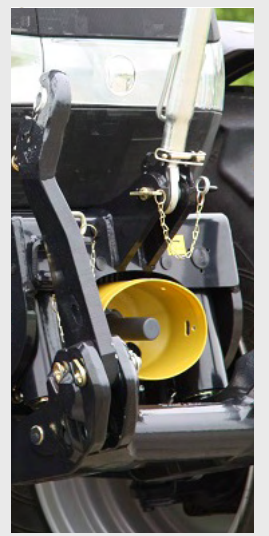

TERMS AND CONDITIONS OF SALE:

1. All goods supplied by Ag Attachments Limited to the buyer are on the following terms and conditions and by placing an order the buyer expressly accepts these terms and conditions.
2. Payment shall be made by the buyer to Ag Attachments Limited in cleared funds on the 20th of the month following the date of invoice.
3. Interest will be charged on all overdue accounts at 5% per month. The Buyer will also reimburse Ag Attachments Limited for all costs incurred by Ag Attachments Limited in recovering overdue amounts (including legal costs on a full indemnity basis).
4. Risk in the goods passes to the buyer as soon as the goods leave Ag Attachments Limited premises. Ownership of the goods remains with Ag Attachments Limited and does not pass to the buyer until payment has been made in full to Ag Attachments Limited. Ag Attachments Limited retains the right to enter the buyer's premises and repossess any goods not fully paid for. The buyer grants to Ag Attachments Limited a security interest under the Personal Property Securities Act 1999 (PPSA) in all present and after acquired goods purchased from Ag Attachments Limited and the proceeds of sale of these goods. On request the buyer will sign any document and do anything else required by Ag Attachments Limited to ensure that the security interest created under these terms of trade constitutes a first ranking perfected security interest over the goods supplied. The buyer waives any right to receive a copy of the verification statement under the PPSR.
5. The liability of Ag Attachments Limited for any loss, damage or injury arising directly or indirectly from the supply of the goods to the buyer including lost revenues, lost profit, lost contracts, interest or goodwill and consequential and/or third party loss whether in contract, or otherwise is limited to the replacement or repair only of any defective goods and all other liability is expressly excluded.
6. No defect in goods supplied will be covered under warranty unless approved by Ag Attachments Limited prior to work being commenced. Any warranty claim is limited to the warranty provided by the manufacturer of the goods and Ag Attachments Limited provides no further warranties. Unless Ag Attachments Limited agrees otherwise, the liability of Ag Attachments Limited will be to use all reasonable endeavours to ensure that the manufacturer honours its warranty and all other warranty liability is expressly excluded.
7. All orders must be confirmed in writing clearly identifying the buyer's name with an order number.
8. Ag Attachment Limited reserves the right to amend prices and specifications of its goods without notice to the buyer.
9. Ag Attachments Limited is not liable for any delay in delivering goods or supplying services and the supply of goods is subject to availability.

INDENT ORDERS:

1. Goods purchased on indent orders are confirmed at receipt of an order, signed by the dealer and the Ag Attachments Limited representative.
2. Indent orders are binding on the dealer and may not be cancelled or amended after seven days from receiving an order number or signing.
3. A 15% deposit may be required on special or indent orders.
4. Extra discount may be available at our discretion. This will be based on order volumes and indent orders.

Please Note: Ag Attachments Limited reserve the right to hold the delivery of units when any of the above trading terms are not adhered to.



P: 07 850 1990

F: 07 850 1991

E: info@agattach.co.nz

PO Box 10232, Te Rapa, Hamilton 3241
49 Old Ruffell Rd, Te Rapa, Hamilton, New Zealand

 [AgAttachmentsLimited](https://www.facebook.com/AgAttachmentsLimited)

www.agattach.co.nz

PRICE BOOK AS OF JUNE 2021

AG

ATTACHMENTS

LIMITED



FIELDMASTER

• PREMIUM FARM EQUIPMENT •

CATALOGUE 2021/22



FIELDMASTER

• PREMIUM FARM EQUIPMENT •

P: 07 850 1990

F: 07 850 1991

E: info@agattach.co.nz

PO Box 10232, Te Rapa, Hamilton 3241
49 Old Ruffell Rd, Te Rapa, Hamilton, New Zealand



FieldmasterNZ

www.fieldmaster.co.nz

CONTENTS

Fieldmaster Mowers

Rotary Slashers/Brush Cutters:

Sabre (18 - 40HP)	4
Sabre Hire Spec (20 - 50HP)	4
M-Series (35 - 80HP)	4
HD Series (60 - 100HP)	4

Brush Cutters/Toppers:

Jumbo (80 - 250HP)	5
GMT Gear Drive Pasture Topper	5
TM Twin Belt Drive Pasture Toppers	5
GMM Gearmower 3n1 Multicut	6
GMM HD	7
PM Parks & PMM Minipark	7
GMF Wide Area Mower	8

Vineyard & Orchard Mowers:

GMR Series - Rear Discharge	9
GML Series - 2-in-1 Mulcher/Mower	9
GMS Series - Side Discharge	9
MX Single Rotor Vineyard Mower	10
Mower Specifications	12-13

Fieldmaster Post Drivers

Fencer	14
Farmer	14
Forté	14
Hydrasideshift Base	15
Hydraulic Rockspike Extractor & Pilot Auger Kit	15

Fieldmaster Attachments

Cultivation:

MF Disc Ploughs	16
Springtine Cultivator	16
Jumbo Buster Rippers	16
Ezy-Bore 40 Post Hole Borer - Cat. I	17
Ezy-Bore 80 HD Post Hole Borer - Cat. I & II	17
Transport Trays	17

Fieldmaster Cosmo

Cosmo Drum Mulchers/Finishing:

TFLS Series	18
TSFM-M Series	19
TSFM-H Series	19
TBPF Series	20

Cosmo Rotary Hoes:

TBUL Series	21
TBUM Series	21
TBUH Series	22
TBVH Series	22

Cosmo Fertiliser Spreaders:

CPL500	23
--------	----

Cosmo Attachments:

Single Tine Rippers	23
3 Tine Rippers	23

Fieldmaster Glaber

VC-40 PTO Driven Woodchipper	24
VC-60R PTO Driven Woodchipper	24
SBX Box Scrapers / Blade	24
ATV Tow Flail Drum-Mulcher	24
Grader Blades	25
Pasture Harrows	25
Land Plane	25

MOWERS • Rotary Slashers/ Brushcutters

Sabre (18-40HP) / Sabre Hire Spec (20-50HP)



Sabre (18-40HP)

- Floating top link
- Tough 5mm deck
- PTO driveshaft
- 1 year warranty
- 18-40 hp compact tractors; Cat I
- Adjustable skids
- Offsettable linkage
- Fitted with stepped slasher flail
- Folded steel plate decks with integral double panels in stress zones - for a rigid chassis that takes the knocks
- Clean, obstruction-free body lines for minimal grass build-up

Sabre Hire Spec (20-50HP)

- Specifically designed for the hire industry
- Pin Torque Limiter Driveshaft Included as standard.
- Suits Tractors 20-50HP
- Fitted with 2x stepped slasher flail as standard
- Adjustable Skids
- Floating Top Link
- Tough 5mm Deck
- Hire Warranty Policy Applies

SABRE1200	Sabre Rotary Slasher 1.2m wide, 2 Flails	
SABRE1500	Sabre Rotary Slasher 1.5m wide, 2 Flails	
4BL	Flail Assembly Sabre 1200/1500 4BL Fitted	
RK	Sabre 1200/1500 Full Width Rear Roller Fitted	
HSKID	TM/GM Hot Skid Option (1x Pair)	
FC	Friction Clutch to suit Sabre 1200/1500 Fitted	
A4061007/PTL	Pin Clutch (Sabre 1200)	
GFS	Sabre 1200/1500 Grass Flow/Spreader Vane Fitted	
GTBL	Gold Tip Flail Assembly Sabre 1200/1500 2 or 4 Blade Fitted	
RSS/RSC	Sabre 1200/1500 Front or Rear Safety Skirt or Chain	
SABREHS1500	Sabre Rotary Slasher Hire Spec 1.5m wide, 2 Flails	
4BL	Flail Assembly Sabre 1500 4BL Fitted	
RK	Sabre 1500 Full Width Rear Roller Fitted	
GFS	Sabre 1500 Grass Flow/Spreader Vane Fitted	
GTBL	Gold Tip Flail Assembly Sabre 1500 2 or 4 Blade Fitted	
RSS	Sabre 1500 Front or Rear Safety Skirt	

M-Series (35-80HP)



M60	1.5m (60") wide, 2 flails	
4BL/M60FTD	Flail Assembly M60 4BL Fitted	
M70	1.8m (70") wide, 2 flails	
4BL/M70FTD	Flail Assembly M70 4BL Fitted	
RK/M60/M70	Full width Rear Roller kit Fitted	
FC/M60/70	Friction clutch Fitted	
GFS/M60/70	Grass Flow/Spreader Vane Fitted	
GTBL/M60FTD/M70FTD	Gold Tip flails fitted (2 or 4 blade)	
RSS/M60/M70	Front or Rear Safety Skirt	

- Floating top link
- Tough 5mm deck
- PTO driveshaft
- 1 year warranty
- Medium weight, 35-80HP tractors, Cat I & II
- Slasher/topper/mower
- Fitted with stepped slasher flail
- Adjustable skids and Offsettable linkage
- Folded steel plate decks with integral double panels in stress zones - for a rigid chassis that takes the knocks
- Clean, obstruction-free body lines for minimal grass build-up

HD Series (60-100HP)



HD60	1.5m (60") Slasher, 2 axe flails	
HD70	1.8m (70") Slasher, 2 axe flails	
4BL/HD60FTD/HD70FTD	HD60/HD70 4BL & Multicut Mulching System Upgrade	
MRK/HD60/70	Full width Mega Rear Roller Kit	
FC/HD60/70	Friction Clutch to suit HD60/70 Fitted	
2009/1200	Cam Clutch integrated PTO (1300Nm)	
ORC/HD	Over run clutch fitted to Drive Shaft	
RSS/HD60/HD70	H.D.Rear safety chain skirt	

- 60-100HP tractors; Cat II
- Adjustable skids
- Floating top link
- Stepped axe flail
- Heavy duty laminated twin 6mm deck
- PTO driveshaft
- Front chain guards
- Monocoque chassis construction
- For cutting up to 50mm (2") scrub
- 1 year warranty

Jumbo (80-250HP)



JUMBO	1.8m (72") Slasher/Brushcutter	
MK/JUMBO	Jumbo Mulching Kit Fitted with Chain Chokes	
FC/JUMBO	Friction Clutch to suit Jumbo	
OC/JUMBO	Overrun Clutch for Jumbo	
3009/1200	Cam Clutch integrated PTO (2600Nm)	
FSC/JUMBO	Front Safety Chain Skirt Fitted to suit Jumbo	
RSC/JUMBO	Rear Safety Chain Skirt Fitted to suit Jumbo	
AFK/JUMBO	10mm stepped axe flail in lieu of straight axe flail	

- 80-250HP tractors; Cat II
- 4 x 16mm HD straight axe flail
- HD circular 16mm flail plate
- HD PTO driveshaft
- 10mm plate deck
- 1000rpm gearbox
- Heavy gauge linkage and deck fabrications with integral bracing and double panels provide a rugged and robust platform for scrub slashing
- Extra high skids and extended length gearbox provides 'throat clearance' for large diameter mulching
- Super Ag Series gearboxes with upsized (1-3/4") 20 spline input shafts are driven through 8 series driveshaft
- Jumbo blades are flame-cut and precision-milled from Bisalloy 400 High Strength plate for long lifespan in continuously heavy conditions

GMT Gear Drive Pasture Topper



GMT180	1.8m GMT Gearmower 2 Rotor Topper	
GMT200	2.0m GMT Gearmower 2 Rotor Topper (30-80HP)	
GMT230	2.3m GMT Gearmower 2 Rotor Topper (40-80HP)	
GMT270	2.7m GMT Gearmower 2 Rotor Topper (50-80HP)	
GMT300	3.0m GMT Gearmower 3 Rotor Topper (1000rpm) (70-130HP)	
GMT330	3.3m GMT Gearmower 3 Rotor Topper (1000rpm) (70-130HP)	
RK/GM180 - 330	Bolt on Full Width Rear Roller Kit (125mm Dia) (180 - 330)	
ASD/GM	GM HD Anti Scalp Dome (Fitted Per Rotor)	
FRSC/GM	GM Front Safety Chain Set	
2009/1200	Cam Clutch integrated PTO (1300Nm)	

A rugged All Gear Drive pasture topper

- Fitted with Friction Clutch
- Fitted with "Gold-Tip" Blades
- Front PVC safety skirt
- High-clearance adjustable skids
- Floating top link
- Cat II linkage
- 1 year warranty

TM Twin Belt Drive Pasture Toppers



TM210	2.1m Twin Belt Drive 3 spindle Topper - 5000 Series	
TM240	2.4m Twin Belt Drive 3 spindle Topper - 5000 Series	
TM270	2.7m Twin Belt Drive 4 spindle Topper - 5000 Series	
TM300	3.0m Twin Belt Drive 4 spindle Topper - 5000 Series	
HSKID	TM/GM Hot Skid Option (1x Pair)	
RK/TM	TM Bolt on Full Width Rear Roller Kit (125mm Dia)	
ASD/TM	TM Front Anti Scalp Skids or Anti Scalp Domes (each)	
RSS/TM	TM Rear Safety Skirts	
FC/TM	Friction Clutch to suit TM210-300	

A high-clearance, hi-speed, twin-belt driven pasture topper

- Fitted with Gold-Tip Blades
- High-clearance adjustable skids
- Open/wide grass flow vanes for lush pasture
- Front rubber safety skirt
- Floating top link
- PTO driveshaft
- Suits tractors 40-120HP
- Cat. II linkage
- 1 year warranty

MOWERS • Multi-Cut Rotary Mulchers

**2 YEAR
WARRANTY**



GMM Gearmower 3n1 Multicut Mulcher/Topper/Slasher

The GMM Gearmower - the preferred choice for mulching work:

- Lower power requirement means less diesel consumption
- Simple transmission system with lower cost parts means reduced maintenance costs
- The transmission system delivers full PTO power to the blades which means no slippage
- Fitted standard with triple stack mulching blades and front safety chains
- Removable rear mulch retaining panels
- Easily changed over to be used as a H.D. pasture topper or slasher by changing the blades
- European gearboxes, driveline and cam clutch integrated PTO (1300Nm)

EURO/GMM160	1.6m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM180	1.8m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM200	1.8m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM230	2.3m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM270	2.7m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM270/3RT	2.7m Euro GMM Gearmower 3 Rotor 3n1 Multicut	
EURO/GMM300	3.0m Euro GMM Gearmower 3 Rotor 3n1 Multicut (1000rpm)	
Euro/GMM330	3.3m Euro GMM Gearmower 3 Rotor 3n1 Multicut (1000rpm)	

OPTIONS AND EXTRAS

GTK	Pasture Topper Upgrade to Gold Tip Flail Set (160 - 270)	
GTK/300/330	Pasture Topper Upgrade to Gold Tip Flail Set (300 - 330)	
AFK	Slasher Blade Upgrade to Axe Flail Set (160 - 270)	
AFK/300/330	Slasher Blade Upgrade to Axe Flail Set (300 - 330)	
RK/GM160 - 330	Bolt on Full Width Rear Roller Kit (125mm Dia) (160 - 330)	
RWK/GM	GM160 - 330 Rear Swivel Castor Wheel Kit (Pair)	
HDF	Hard Face 'Tungsten' Mulching Blade Option (Per Blade)	
FM/GM	GM Front Mount Option	
RSC/GM	Rear Safety Chain 3 Piece Set	
ASD/GM	GM HD Anti Scalp Dome (Fitted Per Rotor)	




OPTIONAL ANTI-
SCALP DOME




HEAVY DUTY PUNCTURE
PROOF URETHANE-FILLED
CASTOR WHEELS



OPTIONAL BOLT ON
REAR ROLLER KIT



Mulching flail



Gold-tip flail



Slasher blade

MOWERS • Multi-Cut Rotary Heavy-duty Mulchers & Park Mowers

GMM HD Multi Cut (1000RPM)



The GMM HD Multipurpose machine is built with our proven GMM deck, with the added strength of an extra heavy-duty drive line - as seen on our Titan Brush Cutter!

- For big tractors with 120-180HP
- Fitted with triple stack mulching blades
- Front safety chain
- Removable rear mulch panels
- Easily changed over to be used as a H.D pasture topper, or a slasher, by changing blades (purchased separately)
- Fitted with a cam clutch integrated PTO 2000Nm
- Twin 5mm laminated construction with full width underbody bracing and overdeck gussets - for strength where it's needed
- Centre gearbox rated to 180hp transfers power through Centaflex industrial-drive couplings - a low maintenance drivetrain to handle serious PTO power levels
- 1 year warranty

GMMHD230	2.3m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GMMHD270	2.7m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GMMHD300	3.0m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GMMHD330	3.3m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GTK	Pasture Topper Upgrade to Gold Tip Flail Set (160 - 270)	
GTK/300/330	Pasture Topper Upgrade to Gold Tip Flail Set (300 - 330)	
AFK	Slasher Blade Upgrade to Axe Flail Set (160 - 270)	
AFK/300/330	Slasher Blade Upgrade to Axe Flail Set (300 - 330)	
RK/GM160 - 330	Bolt on Full Width Rear Roller Kit (125mm Dia) (160 - 330)	
RWK/GM	GM160 - 330 Rear Swivel Castor Wheel Kit (Pair)	
HDF	Hard Face 'Tungsten' Mulching Blade Option (Per Blade)	
FM/GM	GM Front Mount Option	
RSC/GM	Rear Safety Chain 3 Piece Set	
ASD/GM	GM HD Anti Scalp Dome (Fitted Per Rotor)	

PM Parks



		Single Roller	Twin Roller
PM210	(7') 2.1m Parks Roller Mower		
PM240	(8') 2.4m Parks Roller Mower		
PM270	(9') 2.7m Parks Roller Mower (4 spindle)		
PM300	(10') 3.0m Parks Roller Mower (4 spindles)		
FC/PM	Friction clutch		

A Heavy Duty Twin-Belt Drive 5000 Series Rotary Mower

- Rear roller or optional twin rollers
- Twin-belt drive ensures maximum power
- Fitted with "Gold Tip" Blades
- Rear rubber safety skirt
- Suits tractors from 40-120HP
- Twin-belt drive to all spindles
- 67% speed-increaser pulley ratio
- Deep groove section belts to ensure maximum power delivery to blades in all conditions, plus extended belt life
- A triangulated 5mm deck for strength where needed, without adding weight
- 1 year warranty
- Height Adjustable skids

PMM Minipark Mower



PM150MS	Mini Parkmower 1.5m Rear Roller Only	
PM150MT	Mini Parkmower 1.5m Twin Rollers	
PM180MS	Mini Parkmower 1.8m Rear Roller Only	
PM180MT	Mini Parkmower 1.8m Twin Rollers	
FC/PM	Friction Clutch to suit TM210-300	

A low-profile, commercial-grade, precision-cutting, single-belt-drive Roller Mower

- Rear and/or front roller
- Fitted with "Gold Tip" Blades
- 3 HD spindles
- Screw adjustable cut-height settings
- Full under body grass flow vanes for even grass discharge
- Floating top link
- PTO driveshaft
- Weight matched for smaller horsepower, compact tractors
- Suits compact tractors 30-50HP
- Low profile with single or twin roller options
- Maintain a beautiful rolled lawn finish - full width rollers will 'stripe finish' lawns
- 1 year warranty

MOWERS • Dominator Wide Area Mower/Mulcher



GMF 360-R

The Dominator GMF360-R is just one of many set-up configurations available and is designed in a modular style CAD system in order to be able to offer a huge range of set-up options.

- Roller kits on all mowing decks
- Trailing swivel front or rear wheels
- 3-point linkage mounted or trailed version
- Wheels & anti-scalping skids combination
- PTO Cross Shaft
- Optional Slasher blades for general purpose
- Fitted with ‘Gold-Tip’ Blades (Standard)

The Dominator W.A.M wing-hinge system allows unparalleled ground contour following without scalping - as well as the ability to mow in soft, unstable and wet conditions.

- Fieldmaster’s tested and reliable gear-drive transmission system is designed to withstand shock loadings with incorporated anti-shock flex couplings and clutches
- Fitted with ‘Gold Tip’ Blades
- Options are available for wheel and roller configurations, front and rear mounting

EURO GMF 360-R	(3.5m) 3pt linkage. Fitted with Front and Rear Rollers	
EURO GMF 500-R	(5.0m) 3 pt linkage. Fitted with Front and Rear Rollers	
EURO GMF 420-T	(4.2m) Trailed. c/w 4 Rear Wheels	
EURO GMF 500-T	(5.0m) Trailed. c/w 6 Rear Wheels	
EURO GMF 600-T	(6.0m) Trailed c/w 6 Rear Wheels	
ASD/GMF	GMF HD Anti Scalp Dome(Fitted Per Rotor)	



OPTIONAL ANTI-SCALP DOME

The Dominator Compact series of wide-area, hydraulic folding, all gear drive mowers are a new generation of mowers, with specially ‘timed’ blade rotors to enable a compact mow from front to back - but not compromising on the width of cut!

- Unparalleled hydraulic wing float whilst still retaining 100% drive
- Well over 15-20 degree wing float during operation
- A compact transport width (of under 2.2m on a GMF360)
- A unique modular build system that allows for a combination of different components to suit a wide range of mowing applications such as: Sports fields and stadiums, crop stubble mulching, pasture and paddock topping, airports, airfields and runways, parkland areas and set-aside reserves, rough and heavy mowing set aside areas, topping pastures in large farms and stations, fine cut mowing on large rolling or undulating turf and turf farms



GMR Series - Rear Discharge



Orchard/Vineyard Mower:

- Side skids
- Rear mega-roller
- Stepped axle flails for rear-discharge mowing
- European gearbox, driveline
- Cam clutch
- Front rubber safety skirt

	STANDARD	Fitted with rear wheels in lieu of rear roller
EURO/GMR140		
EURO/GMR160		
EURO/GMR180		
EURO/GMR200		
EURO/GMR230		
EURO/GMR270		
EURO/GMR270/3R		
EURO/GMR300		
EURO/GMR330		

GML Series 2-in-1 Mulcher/Mower



Multi-purpose Mulcher/Mower:

- Rear mega-roller
- Twin front stubbie rollers
- Triple-stack mulching blades
- Removable mulching vane
- Removable side plates
- Fitted with European gearbox, driveline
- Cam clutch
- Front rubber safety skirt

	STANDARD	OPTION A: Fitted with front wheels in lieu of twin front rollers	OPTION B: Fitted with 4 x wheels in lieu of all rollers
EURO GML 140			
EURO GML 160			
EURO GML 180			
EURO GML 200			
EURO GML 230			
EURO GML 270			
EURO GML 300			
EURO GML 330			

RSC/GML/CRNLH	GML Rear LH Corner Safety Chain Skirt	
RSC/GML/CRNRH	GML Rear RH Corner Safety Chain Skirt	

GMS Series - Side Discharge



Orchard / Vineyard Mower:

- Rear mega roller
- Twin front stubbie rollers
- Stepped axle flails for side-discharge mowing
- European gearbox, driveline
- Cam clutch
- Front rubber safety skirt


	STANDARD	OPTION A: Fitted with front wheels in lieu of twin front rollers	OPTION B: Fitted with 4 x wheels in lieu of all rollers
EURO GMS 140			
EURO GMS 160			
EURO GMS 180			
EURO GMS 200			
EURO GMS 230			
EURO GMS 270			
ADD: Mulching kit - mulch vane, blades, bolts, sideplates, (GMS 140 / 160 / 180 / 200 / 230 / 270)			
ADD: 1 x pair side blanking plates			

GM SERIES VINEYARD MOWERS

- With an extensive model range in 7 widths, and side or rear discharge versions, the GM Series mowers meet most orchard/ mowing requirements.
- A specially designed compact twin and 3-rotor format, with synchronised blade overlap allows for an excellent turning circle and maneuverability, plus improved contour following in restricted areas.
- 100 mm wide kinked axe flails provide substantial impact and cutting power to handle prunings, while still giving the grass a clean, even finish - throwing to the side or rear.
- 'Triple-stack' mulcher blades on the GML have a central 100 x 10 upper and lower knife tips to provide finely chopped mulch material in all orchard/vineyard row conditions. These blades are double-edged and can be rotated for even wear and economical cutting life.

OPTIONS & EXTRAS:

ASD/GM	HD Antiscalp saucers full set fitted (per rotor)	
GTK	Spare pasture topper flail set c/w 'Gold Tips' (140-270)	
GTK/300/330	Spare pasture topper flail set c/w 'Gold Tips' (300/330)	
HDF	Hardfaced 'Tungsten' upgrade to mulch blades (per blade)	
FM/GM	Front mount option	
4WAY	4-way gearbox (160-270)	

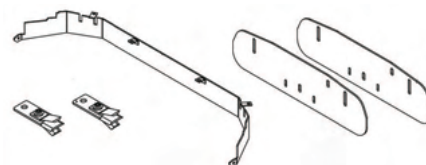

VINEYARD/ORCHARD MULCHING KIT

MX Single Rotor Vineyard Mower



MX40
with rear roller



MX60
on skids


MX40	(3') Vineyard mower c/w skids	
MX50	(4') Vineyard mower c/w skids	
MX60	(5') Vineyard mower c/w skids	
MX70	(6') Vineyard mower c/w skids	
RK/MX	MX Bolt on Rear Mega Roller Kit (220mm Dia)	
FWK/MX	MX Series Front or Rear Wheel Kit (PAIR)	
SDS/MX	Side Discharge Skid (LH) in lieu of std skid	
MK/MX	MX40/50 Mulch Kit fitted (Incl blades & mulch vane)	
FC/MX	MX Series Friction Clutch Fitted	

This heavy duty specialised vineyard mower compliments the GM Vineyard/Orchard series. MX Series vineyard mowers meet the market with a rugged, yet simple, 2-flail single-rotor machine for narrow rows - at a great value price.

- Extra H.D commercial grade deck
- H.D headstock
- Adjustable skids with H.D wear shoes
- Fitted with stepped axe flails
- Rear discharge and floating top link
- Front and rear deflector guard (MX60)



Fieldmaster Evolution – 1955 to Now

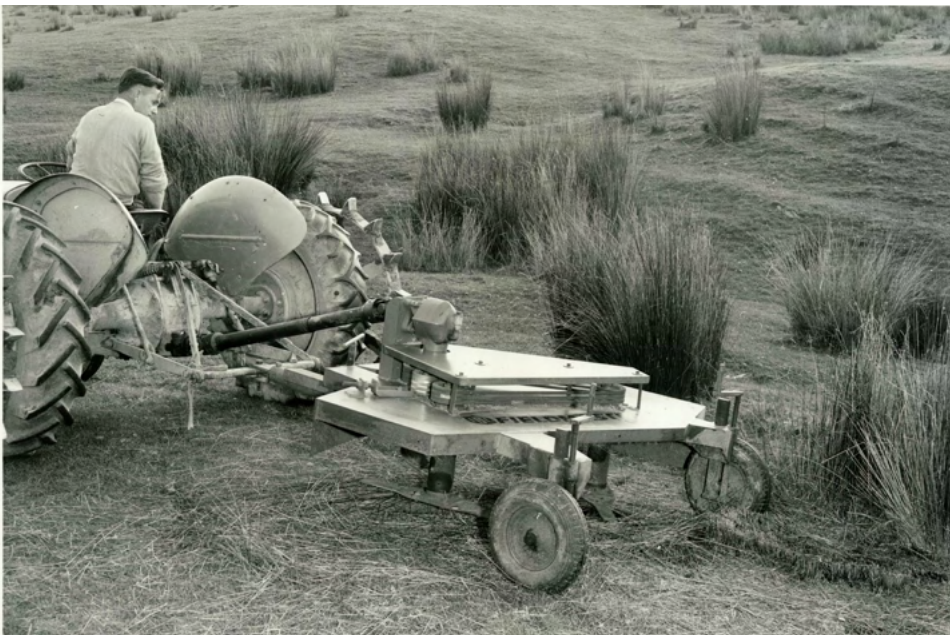

MOWERS • Specifications

Model	Cutting width (approx)	Overall width (approx)	Cutting range	Overall height	Overall length	Weight	Tractor HP range	Cutter heads	Cutting tips	Blade type	Linkage Pins	PTO revs
Sabre 1200	1050	1220	10-85mm	750	1290	150	18-40hp	1	2	Stepped Axe Flail	Cat 1	540RPM
Sabre 1500	1380	1525	10-85mm	750	1580	210	18-40hp	1	2	Stepped Axe Flail	Cat 1	540RPM
M-Sixty	1488	1690	10-85mm	850	1620	350	35-80hp	1	2	Stepped Axe Flail	Cat 1 & 2	540RPM
M-Seventy	1720	1950	10-95mm	880	1977	480	35-80hp	1	2	Stepped Axe Flail	Cat 1 & 2	540RPM
H.D.Sixty	1400	1707	20-120mm	1160	1820	550	60-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM
H.D.Seventy	1786	1950	20-120mm	1160	2090	650	60-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM
Jumbo	1720	2000	30-120mm	1580	2100	850	80-250hp	1	2	Flat Flail 16mm	Cat 2	540RPM
GMT 200	1980	2142	20-120mm	1050	1530	700	30-80hp	2	4	Gold Tip Blades	Cat 2	540RPM
GMT 230	2280	2442	20-120mm	1050	1650	750	40-80hp	2	4	Gold Tip Blades	Cat 2	540RPM
GMT 270	2680	2882	20-120mm	1050	1765	780	50-90hp	2	4	Gold Tip Blades	Cat 2	540RPM
GMT 300	2980	3142	20-120mm	1050	1530	820	70-130hp	3	6	Gold Tip Blades	Cat 2	1000RPM
TM/PM 210	2035	2240	20-120mm	1050	1575	550	40-120hp	3	6	Gold Tip Blades	Cat 2	540RPM
TM/PM 240	2345	2540	20-120mm	1050	1575	680	40-120hp	3	6	Gold Tip Blades	Cat 2	540RPM
TM/PM 270	2645	2840	20-120mm	1050	1575	720	40-120hp	3	6	Gold Tip Blades	Cat 2	540RPM
TM/PM 300	2945	3170	20-120mm	1050	1575	780	40-120hp	4	8	Gold Tip Blades	Cat 2	540RPM
Euro GMM 160	1590	1742	20-120mm	1050	1440	640	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 180	1780	1942	20-120mm	1050	1440	690	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 200	1980	2142	20-120mm	1050	1530	740	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 230	2280	2442	20-120mm	1050	1650	790	40-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 270	2680	2882	20-120mm	1050	1765	820	50-90hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 300	2980	3142	20-120mm	1050	1530	880	70-130hp	3	6	Triple Stack Mulching Blades	Cat 2	1000RPM
Euro GMM 330	3280	3365	20-120mm	1050	1530	920	70-130hp	3	6	Triple Stack Mulching Blades		
GMMHD 230	2280	2448	20-120mm	1050	1650	890	120-250hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
GMMHD 270	2680	2890	20-120mm	1050	1765	920	120-250hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
GMMXHD 300	2980	3142	20-120mm	1050	1530	990	120-250hp	3	6	Triple Stack Mulching Blades	Cat 2	540RPM
GMMXHD 330	3280	3365	20-120mm	1050	1530	1040	120-250hp	3	6	Triple Stack Mulching Blades	Cat 2	540RPM

*Due to continuous manufacturing improvements specifications may vary

Model	Cutting width (approx)	Overall width (approx)	Cutting range	Overall height	Overall length	Weight	Tractor HP range	Cutter heads	Cutting tips	Blade type	Linkage Pins	PTO revs
EURO GMF 360R	3550	3720	10-90mm	1080	1650	1100	70-120hp	4	8	Gold Tip Blades	Cat 2	540RPM
EURO GMF 420T	4150	4350	10-90mm	730	-	-	60-140hp	4	8	Solid Tip Blades	Trailing Hitch	540RPM
EURO GMF 500R	4950	5200	10-90mm	1080	-	-	100-200hp	4	8	Gold Tip Blades	Cat 2	540RPM
EURO GMF 500T	4950	5150	10-90mm	730	-	-	66-140hp	4	8	Gold Tip Blades	Trailing Hitch	540RPM
EURO GMF 600T	5950	6150	10-90mm	730	-	-	120-220hp	6	12	Gold Tip Blades	Trailing Hitch	1000RPM
EURO GMR 140	1380	1542	15-100mm	950	1530	545	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 160	1580	1742	15-100mm	950	1550	650	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 180	1780	1942	15-100mm	950	1595	720	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 200	1980	2142	15-100mm	950	1635	780	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 230	2280	2442	15-100mm	950	1695	820	40-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 270	2680	2882	15-100mm	950	1810	860	50-90hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 300	2980	3142	15-100mm	950	1635	920	70-130hp	3	6	Stepped Axe Flail	Cat 2	1000RPM
EURO GMR 330	3280	3365	15-100mm	950	1695	950	70-130hp	3	6	Stepped Axe Flail	Cat 2	1000RPM
EURO GML 140	1380	1446	15-100mm	950	1550	545	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 160	1580	1630	15-100mm	950	1580	650	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 180	1780	1840	15-100mm	950	1620	720	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 200	1980	2040	15-100mm	950	1654	780	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 230	2280	2340	15-100mm	950	1720	820	40-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 270	2680	2765	15-100mm	950	1850	850	50-90hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 300	2980	3065	15-100mm	950	1654	920	70-130hp	3	6	Triple Stack Mulching Blades	Cat 2	1000RPM
EURO GML 330	3280	3365	15-100mm	950	1720	950	70-130hp	3	6	Triple Stack Mulching Blades	Cat 2	1000RPM
EURO GMS 140	1380	1446	15-100mm	950	1550	520	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 160	1580	1610	15-100mm	950	1580	620	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 180	1780	1816	15-100mm	950	1620	690	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 200	1980	2016	15-100mm	950	1654	760	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 230	2280	2316	15-100mm	950	1720	790	40-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 270	2680	2765	15-100mm	950	1850	840	50-90hp	2	4	Stepped Axe Flail	Cat 2	540RPM
MX 40	1037	1232	10-110mm	900	1510	380	30-80hp	1	2	Stepped Axe Flail	Cat 2	540RPM
MX 50	1247	1406	10-105mm	1000	1633	520	30-80hp	1	2	Stepped Axe Flail	Cat 2	540RPM
MX 60	1485	1707	20-120mm	1050	1695	670	50-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM
MX 70	1786	1950	20-120mm	1100	2050	750	50-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM

*Due to continuous manufacturing improvements specifications may vary

POST DRIVERS • Farmer, Fencer & Forté

- Starts tough from the ground up: base frame and support legs are fabricated from 125 x 75 section RHS, which gives an extra-low centre of gravity - putting the weight and strength where it's needed, for safety and gravity.
- Power through the fencing: 8:1 rope-pully configuration means the hammer falls faster on retraction of the ram, for increased impact force
- Megaflow hydraulics valving is reamed out oversize, allowing oil to move through the operating system faster and cooler, for a quick, positive response - like a big-bore exhaust!
- The tri-beam mast (standard on Fencer & Forté) designed on the triangulation concept is 110% more resistant to twisting force than standard UB section beam. Because you get strength without unnecessary weight the machine operates smoothly without top-heavy, jerking movements.

Farmer



- 180kg (400lb) hammer
- 4.0m mast
- 3 bank control valve (2 spare banks)
- Manual side angle
- 16 ltrs per min required

FARMER/180	Manual Post Driver	
TL/F	Farmer Hydraulic Top Link Kit	
ST/F	Farmer Hydraulic Side Angle Kit	
230kg	Hammer Upgrade - 230kg	
SN/FC	Hydraulic Side Shift (250mm) Nudge Ram Kit (suits Farmer, Fencer & Forté)	
SBV/C	Extra valve slice (per slice)	
QRC	Q.R.C. Fitted on Valve (Per Slice)	
CCV/F	Closed Circuit Valve Mod Kit (suits JD etc)	
RS/FC	Farmer Manual Super Spike Shaft (Tapered 75mm) c/w Chains & Brackets	

Fencer



BEST SELLER
For smaller dairy, beef & sheep farmers

- 230kg (506lb) hammer
- 4.0m H.D. TRI-BEAM mast
- 3-bank valve hydraulic side angle
- Hydraulic top link
- 16 ltrs per min required

FENCER	Hydraulic Post Driver	
280kg	Hammer Upgrade - 280kg	
	Top Link Extension Bracket	
998002.04	Side Angle Extension Bracket	
SN/FC	Hydraulic Side Shift (250mm) Nudge Ram Kit (suits Farmer, Fencer & Forté)	
SBV/C	Extra valve slice (per slice)	
QRC	Q.R.C. Fitted on Valve (Per Slice)	
116006	Polypropylene Post Cap	
CCV/F	Closed Circuit Valve Mod Kit (suits JD etc)	
FENCER/HYDFLD	Hydraulic Post Driver 4.5m Hydraulic Folding Mast c/w hydraulic ram & valve	

Forté



- 320 kg (700lb) hammer
- 4.0m H.D. Beamtec mast
- H.D hydraulic side angle & top link rams
- 3-bank valve
- H.D postcap with polyethylene insert
- Side tilt and top links are upsized to 3" x 1.5" rams
- 16 ltrs per min required

FORTÉ	Hydraulic Post Driver	
SN/FC	Hydraulic Side Shift (250mm) Nudge Ram Kit (suits Farmer, Fencer & Forté)	
CCV/F	Closed Circuit Valve Mod Kit (suits JD etc)	
FORTE/HYDFLD	Hydraulic Post Driver 4.5m Hydraulic Folding Mast c/w hydraulic ram & valve	

Hydrasideshift Bases



HSS300
Ultra compact 300mm
sideshift base



HSS600
Standard 600mm



HSS900
900mm sideshift
base

Easily detachable hydraulic sideshift bases for post drivers - suits most available brands.

HSS300	Hydrasideshift Compact Base with Dual Hitch (260mm Offset) - 300mm	300mm	-	
HSS300/4W	Hydrasideshift Compact Base- 4way Travel	300mm	250mm	
HSS600	Hydrasideshift Standard Base c/w counterbalance weight, tool holder, hose kit, dual slide frame	600mm	-	
HSS600/4W	Hydrasideshift 4Way Base. As above, but with MPS '4-way' / backshift (360°) movement (forward, rev, in, out)	600mm	250mm	
HSS600/VY	VY Vineyard Side Shift Hydraside shift compact vineyard base	600mm	-	
HSS600/VY/4W	VY 4 way base / backshift (360°) movement vineyard base	600mm	250mm	
HSS900	Hydrasideshift Standard Base c/w counterbalance weight, aluminum tool holder box, hose kit, dual slide frame	900mm	-	
HSS900/4W	Hydrasideshift 4Way Base As above, but with MPS '4-way' / backshift (360°) movement (forward, rev, in, out)	900mm	250mm	
Remember to add extra retrofit valves if fitting to existing Rammer, see below:				
SBV/C	Single bank valve kit	-	-	

Hydraulic Rockspike Extractor



Factory-fitted rockspike Fencer & accessory kits are custom designed for ease of operation on Forté post drivers. For hard ground conditions specify factory-fitted rockspike that swing into position to prepare the ground before ramming.

RSK-HYDRASPIKE	Hydraulic Rock Spike Extractor kit for Fencer & Forté models c/w extractor ram, hoses & 40mm lifting plate, extra valve (excludes Rock Spike)	
RS/90	Rock Spike 90mm c/w nylon cap	
RS/120	Rock Spike 120mm c/w nylon cap	

MF Disc Ploughs



Fieldmaster's MF Disc ploughs are easy on horse power and great for the soil because they make a finer cut and give better aeration than a conventional plough.

This is the original well-proven Massey Fergusson designed disc plough. This form of ploughing is suited to a wide range of soil types including peat and sandy country. It's ideal for ploughing crop residue and stubble back in after harvesting.

- Large 66cm heavy duty discs equally spaced at 53cm will work to a depth of 25cm

	No Discs	Length	Wide	Weight	
MDP 2	2	1155mm	660mm	310kg	
MDP 3	3	2130mm	660mm	400kg	
MDP 4	4	2520mm	1320mm	470kg	

Springtine Cultivator



		Number Tines	
ST1500	1.5m Cultivator c/w Roller	16	
ST2400	2.4m Cultivator c/w Roller	23	
ST3000	3.0m Cultivator c/w Roller	30	
ST3600	3.6m Cultivator c/w Roller	35	
ST4200	4.2m Cultivator c/w Roller	41	

The Springtine Cultivator is a very versatile tool! It's ideal for fast and efficient land levelling, seed preparation, stubble cleaning and weed control. The unique design allows you to do high-speed passes at an optimum working depth of 12cm.

- Suitable for tractors 16HP and higher
- Heavy-duty 12mm spring tines
- A HD RHS 4-row frame
- Curved 'L' blades (1.0M = 20/1.5M = 28)
- Cultivator frame is blasted and oven-baked powder coated for a long lifespan
- Height adjustable full-width rear crumbler roller
- Heavy duty 18" diameter rotor
- Built in-house - please order as needed

Jumbo Buster Ripper



	Width	HP Rqd	Weight	Number Tines	
GOCP 5	1600	50 - 70	310	5	
GOCP 7	2100	60 - 80	390	7	
GOCP 9	2500	80 - 100	460	9	
GOCP 11	3000	100 - 130	530	11	
GOCP 13	3000	100 - 130	550	13	

OPTIONAL REAR SPIKES ROLLER KIT

RK/JB2100	Roller Kit for Jumbo Buster Ripper 2.1m	
RK/JB2500	Roller Kit for Jumbo Buster Ripper 2.5m	
RK/JB3000	Roller Kit for Jumbo Buster Ripper 3.0m	

Fieldmaster's Chisel Ploughs or Deep Rippers are invaluable for improving poor drainage, compacted soil and hard pans (under the topsoil).

- Working depth of 20-45cm
- Tine spacing 250mm
- 3-13 tine options with optional roller kits

Uses include:

Soil Aeration: Breaks up the top soil into big random clods which allows air into the soil and helps with the drying out of puggy areas. Also speeds up the decomposing of stubble and releases the nutrients better. **Pan Breaking:** Breaking up the lower hard pan allows roots to penetrate deeper to moisture in dry weather and improves drainage in the wet.

Ezy-Bore 40 Post Hole Borer - Cat. I



PHD40	EZY-BORE 40 Post Hole Borer	
PHD40/AUG100	Auger 100mm (4") for PHD40 c/w Tips	
PHD40/AUG150	Auger 150mm (6") for PHD40 c/w Tips	
PHD40/AUG225	Auger 225mm (9") for PHD40 c/w Tips	
PHD40/AUG300	Auger 300mm (12") for PHD40 c/w Tips	

- 3-point linkage mounted borer
- PTO driveshaft Cat I
- Shear bolt safety cut-out on driveshaft and lifting lug
- Suits tractors 18-40hp
- Supplied powder coated red.
- Augers are 900mm long and NZ made with replaceable tips.

Ezy-Bore 80 HD Post Hole Borer



PHD80	EZY-BORE 80 Post Hole Borer	
AUG300E	Auger 300mm (12") c/w Tips	
AUG350E	Auger 350mm (14") c/w Tips	
AUG400E	Auger 400mm (16") c/w Tips	
AUG500E	Auger 500mm (20") c/w Tips	
AUG600E	Auger 600mm (24") c/w Tips	

- 3-point linkage mounted borer
- Cat II only
- Shear bolt safety cut-out on driveshaft and lifting lug
- Suits tractors 40-80HP
- Augers are 1.2m long and NZ made with replaceable tips
- Extra length available on request

Transport Trays



TT1275TM	1.2m x .75m (4'x2.6') Transport Tray	
TT1275SC	1.2m x .75m (4'x2.6') Stock Crate To Suit TT1275TM	
TT1890TM	1.8m x .9m (6' x 3') Transport Tray	
TT1890SC	1.8m x .9m (6'x3') Stock Crate to suit TT1890TM	
TT2112TM	2.1m x 1.2m (7'x4') Transport Tray	
TT2112SC	2.1m x 1.2m (7'x4') Stock Crate to suit TT2112TM	

**Built from heavy-duty steel for years of trouble-free use.
Handy for the farm or the beach!**

- NZ Made
- Stock Crates
- Powdered Coated Finish
- TowingLug fitted to gear

SGM Finishing Mower



The Cosmo SGM finishing mowers are designed to groom lawn and grass areas professionally. Three (3) suction type blades turn at a high tip speed giving tender grass a fine sharp cut. Four (4) solid swivel wheels allow the mower to follow the contour of the ground resulting in a precise and level cut in undulating conditions. Cutting height can be adjusted by adding or removing spacers on the caster wheel shafts and an anti-scalping roller is standard. Attached to the back of a 25-60hp tractor, the SGM finishing mower works efficiently to mow and maintain areas like private lawns, parks, hospital grounds, schools and golf courses.

Code	TSGM150	TSGM180	TSGM210
Description	(1.5m/5') Finishing Mower	(1.8m/6') Finishing Mower	(2.1m/7') Finishing Mower
Side Transmission	Belt drive		
Belts	Two (2)		
Gearbox	60HP 540RPM		
PTO Shaft	Series 4		
Wheels	Solid, 360 degree rotation		
Finish	Powder Coated		
Type of blade	6mm, high lift, stepped		
No. of blades	Three (3)		
Tower	Fixed/bolt on, centre mount		
Linkage	Cat 1		
Overall Width (mm)	1620	1920	2220
Working Width (mm)	1520	1820	2120
Cutting Height (mm)	20-110		
Tractor Range (HP)	25-60	35-60	45-60
Weight (kg)	225	250	300
Price			

FLS Series Mulcher



The COSMO FLS Series Mulchers are a light duty flail mower designed for compact and sub-compact tractors, 15 to 35HP. A free wheel clutch has been incorporated into the gearbox. The gearbox produces a high rotor speed that results in a finer finish on large areas of lawn, parklands or smallholding farms.

Code	TFLS105	TFLS125	TFLS145
Description	Bully FLS105 Mulcher	Bully FLS125 Mulcher	Bully FLS145 Mulcher
Side Transmission	Belt drive		
Belts	Three (3) SPA type		
Gearbox	35HP, 540rpm with free wheel clutch		
PTO Shaft	Series 4		
Skids	Adjustable, three (3) positions		
Rear roller	Ø102mm, height adjustable		
Finish	Powder coated		
Rotor swing dia. (mm)	280		
Rotor diameter (mm)	76		
Rotor speed (rpm)	3000		
Type of blade	Hammer 'Y' blades on request		
No. of blades	18 36	20 40	24 48
Tower position/offset	Fixed/bolt on with two (2) mounting positions, 100mm apart		
Linkage	Category 1		
Guarding	CE compliant		
Overall width (mm)	1230	1430	1630
Working width (mm)	1050	1250	1450
Cutting height (mm)	from 15mm to 45mm		
Tractor range (HP)	15-35	20-35	25-35
Weight (kg)	158	170	182
Price			

SFM-M/SFM-H Series Mulcher


The European designed COSMO SFM-M (minimal offset) Series Mulchers have a fixed, bolt on tower with three (3) mounting positions. COSMO SFM-H Series Mulchers come with a tower that hydraulically side shifts. The rear of the deck has a series of height adjustable mulching rakes that hold large prunings (up to Ø 50mm) in the cutting chamber for maximum mulching. This results in a high quality cut finish in vineyards, orchards and pastures. The COSMO SFM Series Mulcher is specifically designed for tractors 30 to 70HP.

Code	TSFM130M	TSFM145M	TSFM160H	TSFM175H	TSFM205H	TSFM220H
Description	SFM130-M Mulcher	SFM145-M Mulcher	SFM160-H Mulcher	SFM175-H Mulcher	SFM205-H Mulcher	SFM220-H Mulcher
Side transmission	Belt drive					
Belts	Three (3) BX type	Four (4) BX type				
Gearbox	70hp, 540rpm with free wheel clutch					
PTO shaft/clutch	Series 4			Series 6		
Skids	Adjustable, three (3) positions					
Rear roller	Ø 140mm, height adjustable					
Finish	Powder coated					
Rotor swing dia. (mm)	380					
Rotor diameter (mm)	160					
Rotor speed (rpm)	2083					
Type of blade	Hammer					
No. of hammers	16	18	20	22	26	28
Tower position/offset	Fixed/bolt on tower with three (3) mounting positions, 150mm apart		Hydraulic side shift (300mm)			
Linkage	Category 1		Category 1 and 2 (bushes for category 2)			
Guarding	CE compliant					
Overall width (mm)	1450	1620	1770	1920	2220	2370
Working width (mm)	1300	1450	1600	1750	2050	2200
Cutting height (mm)	from 20mm - 105mm					
Tractor range (HP)	30 - 70	35 - 70	40 - 70	50 - 70	55 - 70	60 - 70
Weight (kg)	366	388	420	440	485	510
Price						

Parts

17295 SFM Series hammer (each)

Optional

17228 SFM Series Y blade (each)

17229 SFM Series Y blade spacer (each)

BPF Series Mulcher



The European designed COSMO BPF Series Mulchers are designed for tractors 60 to 100HP and have a tower that hydraulically side shifts. Like other COSMO Mulchers, a series of height adjustable mulching rakes hold larger prunings (up to Ø 70mm) in the cutting chamber for mulching in vineyards and orchards. Additionally, the rear of the COSMO BPF Series Mulcher deck can be opened to top pasture or when the operator needs to clear the chamber. This function is beneficial when cutting high volumes of material allowing it to be discharged efficiently, without sacrificing speed. Complete with a double skinned deck, side shift, a height adjustable rear roller and hammer blades, this mulcher will produce a high quality finish.

Code	TBPF160H	TBPF180H	TBPF200H	TBPF225H	TBPF250H
Description	BPF160 Mulcher	BPF180 Mulcher	BPF200 Mulcher	BPF225 Mulcher	BPF250 Mulcher
Side transmission	Belt drive				
Belts	Four (4) XPB type				Five (5) XPB type
Gearbox	100hp, 540rpm with free wheel clutch				
PTO shaft/clutch	Series 6				
Skids	Adjustable, two (2) positions				
Rear roller	Ø 165mm, height adjustable				
Finish	Powder coated				
Rotor swing dia. (mm)	410				
Rotor diameter (mm)	170				
Rotor speed (rpm)	2146				
Type of blade	Hammer				
No. of hammers	16	16	20	20	24
Tower position/offset	Hyd. side shift (400mm)	Hyd. side shift (337mm)	Hyd. side shift (437mm)	Hyd. side shift (467mm)	
Linkage	Category 2				
Guarding	CE compliant				
Overall width (mm)	1800	2000	2200	2450	2700
Working width (mm)	1580	1780	1980	2230	2480
Cutting height (mm)	20 - 75				
Tractor range (HP)	60 - 100		70 - 100	80 - 100	85 - 100
Weight (kg)	640	680	735	800	865
Price					

Parts

17067 BPF Series hammer (each)

UL/UM Series Rotary Hoe



The European designed, COSMO UL Series Rotary Hoes are gear driven implements for compact and sub-compact tractors up to 40HP (max.). Engineered to till soil in nurseries, vineyards, orchards and hobby farms, they are ideal for owner operators. The rotor features six (6) C shaped, heat treated blades (per flange) in a speed configuration. The speed configuration, a design where the blades are slightly staggered from flange to flange, reduces the horsepower required to produce a fine finish in a variety of soil conditions.



The European designed COSMO UM Series Rotary Hoes are a single speed, side gear driven implement specifically for tractors in the 35 to 50HP range. Engineered to include multiple features and accessories traditionally found in much larger rotary hoes, the UM Series is suitable for use in nurseries, vineyards and orchards. The rotor features six (6) C shaped, heat treated blades (per flange) in a speed configuration. The speed configuration, a design where the blades are slightly staggered from flange to flange, reduces the horsepower required to produce a fine finish in a variety of soil conditions.

Code	TBUL36	TBUL48	TBUM60	TBUM72
Description	UL36 Rotary Hoe	UL48 Rotary Hoe	UM60 Rotary Hoe	UM72 Rotary Hoe
Side transmission	Gear drive			
Gearbox	40HP, 540rpm, single speed		50HP, 540rpm, single speed	
PTO shaft/clutch	Series 4 with 150mm (6”) friction (slip) clutch			
Skids	Height adjustable			
Finish	Powder coated			
Rotor diameter (mm)	375		434	
Rotor speed (rpm)	245		241	
No. of rotor flanges	4	6	8	9
No. of blades p/flange	6			
Total no. of blades	24	36	48	54
Blades	Curved/speed			
Linkage	Category 1 (quick hitch compatible)			
Guarding	Standard with CE guards			
Overall width (mm)	1035	1340	1775	1970
Working width (mm)	915	1220	1650	1830
Working depth (mm)	165		180	
Tractor range (HP)	15 - 28	20 - 35	30 - 50	35 - 50
Weight (kg)	153	180	285	310
Price				

Parts

14040	UL curved/speed blade (right)
14141	UL curved/speed blade (left)
14124	UL square/L shaped blade (right)
14125	UL square/L shaped blade (left)

Parts

4724	UM curved/speed blade (right)
4723	UM curved/speed blade (left)
4722	UM square/L shaped blade (right)
4721	UM square/L shaped blade (left)

UH/VH Series Rotary Hoe



The European designed COSMO UH Series Rotary Hoes are single speed, gear driven implements specifically for tractors 50 to 75HP. Engineered to include many features and accessories traditionally found in much larger rotary hoes, the COSMO UH Series is suitable for a range of horticultural and gardening applications including nurseries, vineyards and orchards. The rotor, with a diameter of 480mm blade to blade, features six (6) C shaped, heat treated blades (per flange) in a speed configuration. This design, where the blades are slightly staggered from flange to flange, reduces the tractor horsepower required to till a high volume of soil in a wide range of soil types and conditions.



The European designed COSMO VH Series Rotary Hoes have a multi speed gearbox that is rated 50 to 90HP. The main frame is a robust and rigid construction with box section reinforcing and the side gears are sealed via a gasket creating an oil bath. The COSMO VH Series produces a super fine finish. The spring loaded tailgate keeps soil inside and in contact with the blades until it is well pulverised. The multi speed gearbox allows the operator to customise the rotor speed. The rotor design, Ø 521mm from blade to blade, allows a large amount of soil to be worked without clogging up the chamber. The speed blade configuration, a design where six (6) L shaped blades (per flange) are slightly staggered, reduces the tractor horsepower required.

Code	TBUH60	TBUH72	TBUH84	TBVH80
Description	UH60 Rotary Hoe	UH72 Rotary Hoe	UH84 Rotary Hoe	VH80 Rotary Hoe
Side transmission	Gear drive			
Gearbox	75HP, 540rpm, single speed			90HP, 540rpm, multi speed (1000rpm option)
PTO shaft/clutch	Series 6 with 200mm (8") friction (slip) clutch			
Skids	Height adjustable			
Finish	Powder coated			
Rotor diameter (mm)	480			521
Rotor speed (rpm)	241			191 - 240 at 540rpm 248 at 1000rpm
No. of rotor flanges	7	8	9	8
No. of blades p/flange	6			
Total no. of blades	42	48	54	48
Blades	Curved/speed			Square/L shaped standard Curved/speed on request
Linkage	Category 1 and 2			Category 2
Guarding	Standard with CE guards			
Overall width (mm)	1834	2063	2292	2185
Working width (mm)	1680	1910	2140	2020
Working depth (mm)	190			225
Tractor range (HP)	50 - 75	55 - 75	60 - 75	70 - 90
Weight (kg)	390	420	450	665
Price				

Parts

- 3127** UH curved/speed blade (right)
- 3126** UH curved/speed blade (left)
- 3172** UH square/L shaped blade (right)
- 3173** UH square/L shaped blade (left)

Parts

- 3029** VH/UHH square/L shaped blade (right)
- 1374** VH/UHH square/L shaped blade (left)
- 23160** VH/UHH curved/speed blade (right)
- 23159** VH/UHH curved/speed blade (left)

PL Series Fertiliser Spreader



The COSMO PL Series Fertiliser Spreaders offer a simple and effective solution to spreading a range of fertilisers (pilled, granular or powdered) and seed between 6 and 14m. The heavy duty PVC hopper is UV stabilised, will not rust, is less likely to suffer from dints and scratches and is durable. The smooth interior finish of the hopper ensures fertiliser slides down the hopper evenly to the exits. The twin lateral (side) exits provide the operator with left, right or full coverage spreading and also ensures uniformed spreading as the material drops straight onto the Stainless Steel six (6) vane spinner disc.

Code	CPL500
Description	PL500 PVC Hopper Spinner Spreader
Capacity (lt/kg)	450 / 449
Spreading width (m)	8 - 14
Dimensions	
Width (mm)	1110
Depth (mm)	1110
Height (mm)	1170
Tractor range (HP)	35+
Weight (kg)	63
Price	\$1,830

Parts

619.010	P/PL Hydraulic Opening System	\$760
619.012	P/PL Lime Agitator To Suit CPL500 Fert Spreader	\$280
620.102	P/PL Single Side Distributor	\$1,610
620.106	P/PL Twin Side Distributor	\$1,270
902.003	P/PL Hopper Cover Fert Spreader CPL500	\$230

Single Tine Ripper



Options

KRPMN	Mini Range pipelayer	\$610
KRPMR	M Range pipelayer	\$660
KRPHR	H Range pipelayer	\$670

Parts

160.100a	Ripper point (each) (suits M Single and H Range)
160.100b	MINI Range ripper point (each)
160.101	Ripper point bolt kit (each)

Code	KRMN	KRMRS	KRHRS
Description	Mini Range Single Tine Ripper	M Range Single Tine Ripper	H Range Single Tine Ripper
Construction	Steel 4mm sq. tube, welded and gusseted	Steel 5mm sq. tube, welded and gusseted	Steel 6mm sq. tube, welded and gusseted
Linkage/Mounting	Double clevis, category 1	Double clevis, category 1 and 2	
Finish	Powder coated		
Tine profile	Fixed, 130x25, chamfered edge	Fixed, 150x32, chamfered edge	
Tine material	Mild steel		
Working depth (max.)	350mm	500mm	650mm
Weight (kg)	40	70	90
Tractor range (HP)	15 - 28	25 - 50	35 - 80
Price			

3 Tine Ripper



Parts

160.100a	Ripper point (each) (suits H Range 3 Tine)
160.100b	MINI Range ripper point (each) (suits M Range 3 Tine)
160.101	Ripper point bolt kit (each)

Code	KRM3	KRH3-M
Description	M Range Three (3) Tine Ripper	H Range Three (3) Tine Ripper - MS
Construction	Steel 5mm sq. tube, welded and gusseted	Steel 9mm sq. tube, welded and gusseted
Linkage/Mounting	Double clevis, category 1	Double clevis, category 2
Finish	Powder coated	
Tine profile	Height adjustable/three (3) positions, 130x25, chamfered edge	Height adjustable (three (3) positions), 150x32, 'chamfered' edge
Tine material	Mild steel	
No. of tines	3	
Working depth (max.)	550mm	900mm
Weight (kg)	115	290
Tractor range (HP)	25 - 45	50 - 90
Price		

VC-40 PTO Driven Woodchipper



VC-40	PTO Driven 4" chipper - manual feed	
--------------	-------------------------------------	--

A great lifestyle 4" chipper for small tractors 15-40HP.

- Valuechip 40 chips (4") 100mm branches
- 540 rpm PTO speed
- Weight: 195kg
- Manual feed only (no feed rollers)
- Shearbolt PTO driveshaft
- 360° swivel/adjustable discharge chute

VC-60R PTO Driven Woodchipper



VC 60R	PTO Driven 6" chipper - hydraulic feed	
---------------	--	--

- Size 6" (150mm) branches
- Fitted with hydraulic-driven feed rollers for ease of loading/feeding foliage
- 540 rpm PTO speed
- 12" blades
- Safety cut-out bar
- A popular PTO-driven chipper for 50-80HP tractors
- Come with PTO driveshaft
- 360° swivel/adjustable discharge chute

SBX Box Scrapers/Blade



SBX-4	(4') 1200mm Box Scraper c/w 4 shanks	
SBX-5	(5') 1500mm Box Scraper c/w 5 shanks	
SBX-6	(6') 1800mm Box Scraper c/w 6 shanks	
SBX-7	(7') 2100mm Box Scraper c/w 7 shanks	

Box blades are a lot more effective than just a standard scraper/grader blade as the 'boxed in' sides allow for better control and retention of the cut material.

Only in recent years are New Zealanders beginning to realise the advantages of these blades! Heavy duty box scrapers with removable and adjustable front scarifiers for levelling, finish grading and backfilling.

- Double cutting edges (front & back) for forward and reverse blading
- Cat 1 Linkage

ATV Tow Flail Drum-Mulcher




AF120R	ATV Flail Mulcher (1.2m) rear opening tail gate version	
---------------	---	--

A handy 'all-rounder' to hitch to your ATV quad bike to tidy and mow rough areas, weeds, paddock mowing and driveways - and it can also mulch small prunings!


- This great little mulcher cuts 1.2mtrs wide
- A powerful 15HP electric start
- Easily adjustable for cutting between 25-70mm high
- 24 mulching spring steel hammer flails

Grader Blades

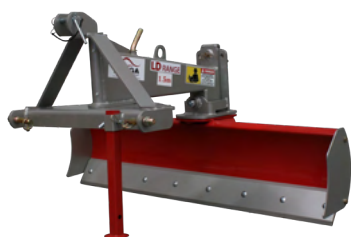

Code	KBLD120	KBLD180
Description	Mini 1200 (1.2m/4') Grader Blade	S1800 (1.8m/6') Grader Blade
Headstock	Steel 80x80x4mm sq. tube, welded	Steel 100x100x4mm sq. tube, welded
Mouldboard	6mm with channel reinforcing	
Cutting edge	150x12mm, spring steel, reversible	
Linkage/mounting	Double clevis, category 1	
Finish	Powder coated	
Adjustments	Angle, offset and tilt	
Blade angle	28 positions over 360°	
Blade offset	6 positions (3 left and 3 right)	
Blade tilt	Camber only (100mm using lower linkage holes)	Camber only (150mm using lower linkage holes)
Controlled by	Pins, clips, wingnut	P
Overall width (mm)	1200	1800
Tractor range (HP)	18 - 30	25 - 35
Weight (kg)	122	230
Price		

Pasture Harrows

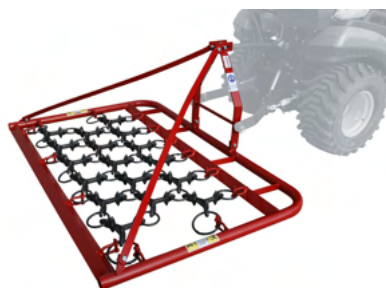

Code	KHPR200	KHPR400
Linkage/Tow Hitch	3pt Linkage/Cat 1	
Design	Tube frame with single piece cast net	
Harrow Material	Cast metal, three (3) prong star net	
Folds	Manual	Manual
Width (mm)	2000	4000
Folded Width (mm)	N/A	2000
Depth (mm)	1300	1800
Weight (kg)	150	245
Tractor Range (HP)	20-60	30-60
Price		

Land Plane



Code	KLP150	KLP210
Description	1.5m Land Plane	2.1m Land Plane
Construction	Fully welded, rigid (braced and gusseted), boxed tool bar	
Cutting edge	Two (2), 150x12, high tensile, reversible	
Linkage/Mounting	Double clevis, category 1	
Finish	Powder coated	
No. of tines	4	6
Working width (mm)	1520	2130
Overall width (mm)	1650	2300
Tractor range (HP)	20 - 40	35 - 75
Weight (kg)	233	293
Price		

WARRANTY POLICY

TERMS & CONDITIONS

1. All prices and specifications are subject to renewal or alteration without prior notification.
2. Prices are in New Zealand Dollars and exclude GST.
3. It is the dealer's responsibility to check stock price and availability before quoting any model for resale.
4. Fieldmaster reserves the right to not sell any or all of the items in the price list to any potential purchaser or reseller.

WARRANTY TERMS

All Fieldmaster machinery is covered by a comprehensive warranty against faulty materials and workmanship provided that: -

1. The machine is operated under normal conditions.
2. The machine is correctly serviced and maintained as per operators manual.
3. The machine is worked within its stated capacity (ie. horsepower limit and PTO speed).
4. The machine is not subjected to any non-approved modifications or damage from improper use Fieldmaster is in receipt of duly signed pre-delivery and installation certificate.
5. Failure due to operator error, negligence, improper use or lack of servicing in accordance with the operators manual is not covered by warranty.

The term of warranty shall be 12 or 24 months dependent on the specific machine from date of installation. Except machines sold into the Hire Industry which shall be void of warranty unless written approval given.

The following items are not covered by warranty;

1. Power take-off shafts and clutches.
2. Consumable items such as blades, tines, flails, knives, tyres, belts etc.
3. Freight costs.
4. Loss of income from the machine due to a warranty fault.
5. Use of non-genuine parts.
6. Operator error or misuse.

WARRANTY PROCEDURE

In the event of a product failure please phone your local Fieldmaster dealer immediately and discuss the problem with their customer services team.

HIRE MACHINE WARRANTY POLICY

Machines sold into the Hire Industry which shall be void of warranty unless written approval given, a limited 6 month warranty shall then apply.

NOTES & QUOTES

[illegible]

NOTES & QUOTES

[illegible]