



CATALOGUE 2025/2026



CONTACTS

SALES

sales@agattach.co.nz

Martin Gray

National Sales Manager

027 493 6646

martin@agattach.co.nz

Graham Maisey (Oz)

Sales Manager

021 228 6502

graham@agattach.co.nz

PARTS

parts@agattach.co.nz

Paul Fleming

Parts Manager

07 850 1990

paul@agattach.co.nz

Rob Eichmann

Senior Parts Assistant

07 850 1990

rob@agattach.co.nz

GENERAL

info@agattach.co.nz

Rose Lyes

Creditors & Accounts

07 850 1990

admin@agattach.co.nz

Deane Hughes

Manager

027 257 7935

deane@agattach.co.nz

TECHNICAL

Sales and technical
advice for **Stoll, Sauter,
Göppel & Dromone**

Dan Molloy

Wholesale Manager

027 493 6647

dan@agattach.co.nz

WARRANTY

warranty@agattach.co.nz

07 850 1990

PO Box 10232, Te Rapa, Hamilton 3241
34 Ingram Rd, Rukuhia, Hamilton, 3282 New Zealand



@AgAttachments

www.agattach.co.nz

OUR BRANDS

STOLL	ProfiLine	6	
	Solid	8	
	Accessories	10	
	Buckets & Implements	12	
TANCO	i73 BaleShear	14	
EASYMASS	Tractor Weight Blocks	14	
ALBUTT	Forks	15	
	Buck Rakes	15	
	Grabs	15	
	Scrapers	15	
	Bucket Brush	15	
CARRAROSPRAY	Linkage Sprayers	16	
	Spray Booms & Accessories	17	
	Orchard Sprayers	18	
DROMONE	Hydraulic Pick-Up Hitch	19	
	Implements	19	
EMILY	Auger Bucket	20	
	Fixed Rotor Bucket	20	
	Hay & Straw Blower	20	
EURODUALS	Dual Wheels	21	
	Posilux Kits	21	
ZOCON	Grassland Harrow	22	
	Greenkeeper	22	
	Bale Clamp	22	
	Modular Rubber Scraper	22	
	Tipping Trailers	23	
SAUTER	Options	24	
	John Deere	25	
	Case	26	
	New Holland	27	
	Claas	28	
	Deutz Fahr	29	
GÖPPEL	Massey Ferguson	30	
FIELDMASTER	Fieldmaster Range	31	
COSMO BULLY	Cosmo Bully Range	43	
GLABER	Glaber Range	49	
TERMS & CONDITIONS	Terms & Conditions of Sale	51	

STOLL



THE MEASURE OF ALL FRONT LOADERS.

High end on your farm: Big tractors are on the rise. Of course, at STOLL we also offer the front loaders to go with them. Our ProfiLine Next Generation reliably surpasses the most gruelling tests. Its versatile usability is legendary. It is our pride and joy.

CONVINCING BENEFITS FOR YOU.

- ✓ The various front loader models fit perfectly on tractors from 50 to over 300 hp.
- ✓ Best quality fine-grained steel for a front loader with high torsional rigidity and stability.
- ✓ The extremely high values for the lifting capacity and height are impressive.
- ✓ Z-kinematics and the optimally positioned cross tube provide the driver with the best view of the implement.
- ✓ For maintenance work, all you need is a commercially available spanner to get to the lines.
- ✓ Best equipment for optional features so you can work with even greater efficiency:
Return-to-level, rapid emptying and re-scooping.
- ✓ Re-scooping series.
- ✓ Depending on the loader model, quick release frames are available for other coupling systems —
STOLL offers full flexibility.

STOLL PRODUCT LINES.



PROFILINE
ISOBUSCONNECTED



PROFILINE



SOLID

APPLICATION AREAS. SUITABLE FOR ALL REQUIREMENTS.

TOP CLASS.
MADE IN
GERMANY.

German engineering is known all around the world for its high quality, performance and reliability. That is why we develop all STOLL front loaders with precisely these values in Germany. They combine state-of-the-art technology with innovative solutions – and this is exactly what we expect from high-quality German products.

Experience the full power of the STOLL ProfilLine Next Generation. The amazing best values in all areas ensure the highest quality in lifting capacity and lifting height, stability and loading speed. In addition to this, the individually selectable accessories from the ProfilLine Next Generation fit in perfectly with your needs as a farmer or contractor. True professionals for professionals.

FULL POWER – MAXIMUM STABLE CONSTRUCTION.

- ✓ The ProfilLine FZ front loaders are made of fine grain steel – Advantage: Highest stability with maximum torsional rigidity at the same time.
- ✓ The lifting arm boom is bent from a single piece of steel – The control rods are installed inside the beam. All the hydraulic lines are well protected but can be freely accessed under the beam.
- ✓ Kinematics of the entire lift arm body adapted to modern tractors. This results in optimum positioning of the lift arm to relieve the front axle and the best possible clearance for steering angle and axle swing path.
- ✓ In order to avoid the need to regularly replace the hose lines by the lifting arms in accordance with DIN 20066, we use wear-free steel hydraulic pipes instead.

Our intelligent designs provide you with a variety of comfort features exclusively from STOLL.



- 1** Wide sleeved bearings on the moving parts with lubrication points that can be easily accessed from the outside.
ONLY AT STOLL. MORE IS NOT POSSIBLE.
 - ✓ 40 mm pin diameter from the largest to the smallest loader.
 - ✓ 45 mm pin diameter at the upper pivot point of the Z-kinematics.
 - ✓ 50 mm pin diameter at the rear lift arm pivot point.
- 2** Quick to mount and dismount in just two minutes thanks to the proven STOLL drive-in system.
- 3** All the hydraulic lines are under the beam rail, to ensure they are well protected and the driver has a clear view.
- 4** Double-acting lifting cylinders for a particularly high lifting capacity.
- 5** The Z-kinematics frees the view of the implement and ensures even greater lifting power.
- 6** The cross bar is optimally positioned for the best view and to protect the hydraulic lines at the front.
- 7** Safe and reliable parking stands that are easy to use – completely without implements.
- 8** Euro quick release frame for attaching the implement in seconds with semi-automatic or electro-hydraulic locking mechanism.



STOLL ATTACHMENT COMPONENTS – LESS LOAD ON THE TRACTOR AND A GREATER ACCURATE FIT.

- ✓ The attachment components can be installed perfectly on all common tractors – that is why the designers at STOLL individually adapt every tractor model.
- ✓ Reduced load on the front axle thanks to the optimal positioning of the attachment components close to the driver's cab. This shifts the centre of gravity of the entire front loader to the centre of gravity of the tractor.
- ✓ Often the windscreen can only be opened together with a STOLL attachment component.
- ✓ The attachment components fit perfectly as they are individually adapted to each tractor.

Z-KINEMATICS – BEST VIEW AND HIGH PERFORMANCE.

- ✓ The rods of the mechanical parallel guide are located in the lifting arm booms – the basis of the Z-kinematics.
- ✓ This frees up the view for the driver. No parts above the lifting arms obstruct or are in the way. Another benefit: The front loader can also be mounted closer to the driver's cab – result: Reducing the load on the tractor by optimally positioning the attachment components.
- ✓ Front loaders with Z-kinematics have even greater lift capacities and breakout forces. There is no loss of lifting power.




	Model Number	HP	Std Bucket metres	Lift Height mm (H)	Lift Capacity kg (Q2)	Retail Price excl GST
FS ProfiLine	<i>Double acting lift rams, non self levelling</i>					
	FS 36-24	50 - 90	1.5	3.55	1470	POA
	FS 39-27	70 - 110	1.7	3.85	1580	POA
	FS 41-33	90-140	1.9	4.10	1870	POA
	FS 43-34	120-180	1.9	4.32	2080	POA
FZ ProfiLine	<i>Double acting lift rams, mechanical self levelling</i>					
	FZ 36-24	50 - 90	1.5	3.55	1750	POA
	FZ 39-23	70 - 100	1.7	3.85	1550	POA
	FZ 39-27	70 - 110	1.7	3.85	1800	POA
	FZ 41-33	90-140	1.9	4.10	2200	POA
	FZ 43-34	120-180	1.9	4.32	2430	POA
	FZ 46-33	150-230	2.05	4.55	2590	POA
	FZ 48-42	180-270	2.05	4.80	2790	POA

STOLL PROFILINE STANDARD LOADER PRICES INCLUDE:

Attention: Please include the tractor model, year and horsepower rating in your order.

- Mounting kit
- Joystick and control valve (Base Control)
- Euro quick implement hitch
- Double acting lift rams
- Twin crowd rams
- Third service
- Standard bucket



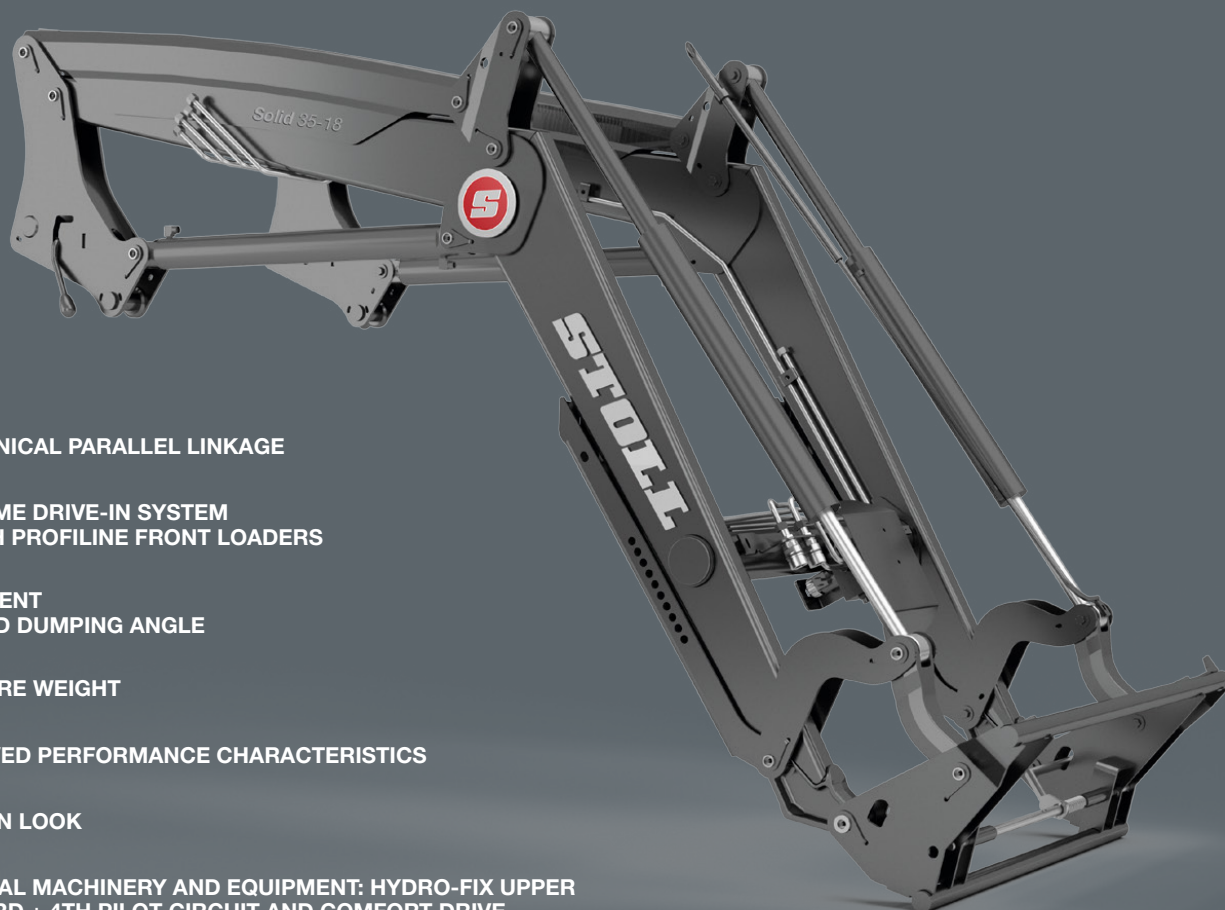

- + MECHANICAL PARALLEL LINKAGE
- + THE SAME DRIVE-IN SYSTEM AS WITH PROFILINE FRONT LOADERS
- + EXCELLENT TILT AND DUMPING ANGLE
- + LOW TARE WEIGHT
- + IMPROVED PERFORMANCE CHARACTERISTICS
- + MODERN LOOK
- + OPTIONAL MACHINERY AND EQUIPMENT: HYDRO-FIX UPPER PART, 3RD + 4TH PILOT CIRCUIT AND COMFORT DRIVE
- + SPECIAL PAINT FINISH AVAILABLE

Solid. The allrounder.

Best performance in terms of lifting power and height. Top values in stability and loading speed. Comfortable to operate: the Solid was specifically developed to fulfil all the needs of professionals.

A wealth of possible uses – this is what the new Solid offers you in eight different models: Suitable for your tractor between 45 and 135 hp, the front loaders are easy to operate and reliable. As always, STOLL has the right implements for your needs!

Because the front loaders from the Solid range are particularly light in comparison, they perform best, for example, in hilly terrain. And: They are suitable for numerous used tractors – because STOLL is in tune with its customers from all generations. Many family-run farms and farmers working as sideline enterprises are thrilled when there are new front loader solutions for their tried and tested tractor technology!

Your advantage with Solid: A real STOLL at an ideal price-performance ratio. Driven by the wishes of our customers, the engineers at STOLL have created a product that is both functional and flexible. A visual and functional highlight for your tractor.



	Model Number	HP	Std Bucket metres	Lift Height mm (H)	Lift Capacity kg (Q2)	Retail Price excl GST
Solid P	<i>Mechanical self levelling</i>					
	30-16P	45 - 65	1.50	3010	1220	POA
	30-18P	55 - 80	1.50	3460	1270	POA
	38-20P	65 - 100	1.70	3760	1410	POA
	40-22P	80 - 135	1.70	4080	1530	POA

STOLL SOLID STANDARD LOADER PRICES INCLUDE:

Attention: Please include the tractor model, year and horsepower rating in your order.

- Mounting kit
- Joystick and control valve (Base Control)
- Euro hitch
- Double acting lift rams
- Twin double acting crowd rams
- Third service
- Standard bucket



The implement under control.

Attaching the implement... just a quick pit stop.



1 Drive in and hook the implement in.




2 Tilt the implement – the locking mechanism automatically slots into place.



3 Plugging in the hydraulic connection.

HIGH COMFORT AND EASY OPERATION WITH HYDRAULIC CONTROLS

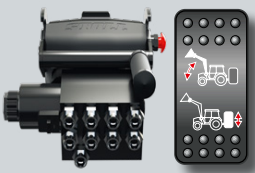	Description	Retail Price excl GST
Base Control	<i>Included in standard loader price</i>	
	• Accurate, safe and easy loader handling • Electric buttons integrated for additional loader functions • Five standard functions: lift, drop, dump, tip and floating • Lock function for road driving	
	Base Control (fitted to tractor model)	POA
Pro Control		
	• Loader operation simple and proportional • Five standard functions: lift, drop, dump, tip and floating • Three additional functions: quick dump function, 3./4. control circuit, lock function for road driving	
	Pro Control (ECO-Pro-System for OC, OCLS; CCLS). 5 button Joystick (STD)	POA
Hydraulic Hose Kit		
	• Use when tractor's own control units are available • Designed individually to each tractor	
		POA
Comfort-Hydraulics		
	• Selector switch for the activation of front loader or rear hydraulics • Safety System, dual function of hydraulic supply is prevented - giving an either-or circuit	
		POA

ACCESSORIES

	Description	Retail Price excl GST
Switch Kit for Base Control	<i>Dealer Fit Switch Kit</i>	
	• Switch Kit - Switches available for Transmission Shifting	POA
4th Control circuit		
	• Easy handling for implements with hydraulic functions	POA

	Description	Part Number	Retail Price excl GST
STOLL Hydro-Fix	<i>Rectangular / 4x coupling - from 02/2015</i>		
	HYDRO-FIX cpl.	3645180	POA
	Lift arm side only	3645190	POA
	Tractor side half only	3609860	POA
	Electric Plug Kit		POA
STOLL Tool Fix	<i>2-line coupling / for 3. + 4. service</i>		
	Tool-Fix cpl.	3331530	POA
	Lift arm side only	3474580	POA
	Implement side only	3617080	POA
STOLL Hydro-Fix	<i>6-line coupling / Doesn't fit with Single Lever Control</i>		
	HYDRO-FIX cpl. da	3614720	POA
	Lift arm side only		POA
	Tractor side half only		POA
Comfort-Drive			
	• Shock absorber to give a smooth drive on the road • Shock loads from uneven surfaces will be reduced • Less stress for driver and tractor		
	Comfort-Drive FZ / FS		POA
	Comfort-Drive FZ / FS Electric Shut Off		POA
	Comfort-Drive CL		POA
Hydro-Lock			
	• Double acting implement ram • Lock and unlock your Implement by switching a button • Implement change without leaving the cabin		
	Hydro-Lock only for FZ / FS		POA
Return to Level			
	• It saves time and increases your loading capacity • A sensor mounted on the parallel rod will bring your implement back to work position by pushing a button • Additional quick dumping function included		Indent
	For ProfilLine FZ - Series from ProfilLine FZ 100		POA
REAL³	<i>Live third service</i>		
	• Oil circuit for independent 3rd. function, front loader functions will not be restricted • To serve full oil flow constant without restrictions (for example for an oil motor) • Efficient use of implements		
	Pipe Kit - Only for ProfilLine		POA
	Valve Kit		POA



A TOUGH PERFORMER FOR YOUR PROFILE: THE PERFECT BUCKET FOR EVERY DEMAND, VERSATILE IN USE AND STRONG IN CONSTRUCTION:

- ✓ High level of robustness, low wear and low weight thanks to the use of high quality steel.
- ✓ Easy work even with sticky products – the conical shape, which opens up towards the cutting edge, makes this possible.
- ✓ The cutting edge can withstand the toughest stress – day after day, year after year.

BUCKETS MADE OF HIGH-QUALITY MATERIALS

	Width metres	Volume Level Heap m ³	Volume Level Meas m ³	BRINELL 500 HB Cutting Edge	Weight kg	Retail Price excl. GST
Robust S.	<i>Earth Buckets</i>					
	1.50	0.60	0.52	150 x 16	161	POA
	1.70	0.68	0.59	150 x 16	190	POA
	1.90	0.74	0.64	150 x 20	242	POA
	2.05	0.81	0.70	150 x 20	258	POA
	2.20	0.87	0.76	150 x 20	308	POA
	2.40	0.94	0.82	200 x 20	351	POA
	2.60	1.01	0.88	200 x 20	376	POA
Robust M.	<i>Maxi-Bulk Bucket</i>					
	2.05	1.45	1.13	150 x 16	320	POA
	2.20	1.56	1.22	150 x 16	384	POA
	2.40	1.70	1.33	200 x 20	432	POA
	2.60	1.86	1.45	200 x 20	462	POA

	Width metres	Grading Range	Capacity m ³	Weight kg	Retail Price excl. GST
Bucket with Grab	<i>3rd Control Circuit Required</i>				
	1.80	1.300	1.00	550	POA
	2.00	1.300	1.10	615	POA
	2.20	1.300	1.21	640	POA

IMPLEMENTS



	Grabbing Range mm big/small	Weight kg	Retail Price excl. GST
Global Wrapped Bale Handler			
	1800 / 800	160	POA
	For round bales with diameter of 0.80m to 1.40m 3rd service required		
Wrapped Bale Handler			
	1800 / 1000	225	Indent
	For round bales 1.00m to 1.80m diameter / square bales up to 1.60m 3rd service required		
Wrapped Bale Handler - Pro H			
	2050 / 650	305	POA
	Biggest/smallest opening 2.05m / 0.65m / effective depth 1.20m / transport width 1.35m / for wrapped square and round bales 3rd service required		

	Lifting Capacity kg	Tine mm	Weight kg	Retail Price excl. GST
Pallet Fork 1000				
	1000	1000	113	POA
Pallet Fork HD (Refer to Dromone)				
	2500	1200	199	EURO POA
				JCBQ POA

	Weight kg	Retail Price excl. GST
Three-Point-Linkage-Adapter		
	60	POA
	For EURO-attachments on 3pt linkage rear. Max. 1.5t load at the lower link coupling point	




TANCO I73 BALESHEAR

TANCO

	Width metres	Length metres	Height closed	Height opened	Weight kg	Price excl GST
	<i>Slice and retain plastic for bales up to 1.5m in diameter (Includes Euro Plates)</i>					
	1.82	1.05	0.85	1.73	450	POA

- Splits round bales up to 1.55m in diameter while retaining the plastic
- Feed directly on feed passageways, diet feeders and feeding rings
- Cuts silage, hay, maize and straw with ease
- Single standard hydraulic coupling

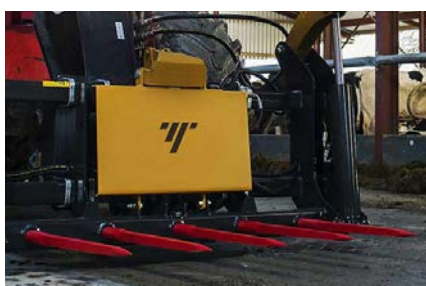

EASYMASS TRACTOR WEIGHT BLOCKS



Cast Iron weight blocks, available in 600kg and 900kg in green, 850kg in grey.

- They are all compatible with our add-on weights.
- For John Deere, the green blocks can be fitted on the front hitch as well as directly on the original weight carrier.
- Weights can be picked up using a pallet truck or Forklift thanks to the 2 cutouts at the bottom

The EASYMASS® 600kg add-on weight can simply be added or removed to the front of the 600kg, 850kg or 900kg weights depending on your needs.

CAT 2/3



Description	Retail Price excl GST
600kg Tractor Weight, linkage	POA
600kg Tractor Add-on Weight, clip-on	POA
850kg Tractor Weight, linkage GREY	POA
900kg Tractor Weight, linkage GREEN	POA

**other sizes and colours available on indent*

Implement	Part Number	Width metres	Capacity m³	No. tines	Weight kg	Retail Price excl GST
Grass Fork	Hardox Tine					
	B824PPHX (Fold Push)	2.97-4.27	7.82	16	2200	Indent
	B914HX (Folding)	3.05 - 4.27	8.00	16	1690	Indent
	B710HX (Rigid)	3.05	4.60	12	1080	Indent
Heavy Duty Buck Rake	Recommended for tractors 160HP and above. Hardox Tine					
	B810PPHX	3.05	6.08	12	1400	POA
	B809PPHX	2.74	5.43	11	1320	Indent
	B808PPHX	2.44	4.8	10	1220	Indent
Buck Rake	2 pairs of side tine included. Forged Tine					
	B810PP	3.05	4.41	18	1060	Indent
	B809PP	2.74	3.96	16	1020	POA
	B808PP	2.44	3.53	15	980	Indent
Heavy Duty Twin Ram Power Grab	Suitable for tractor loaders. Hardox Tine - Open grab measurement 1.060mm					
	E380HXG	1.80	0.90	9F 5G	350	POA
	E410HXG	2.13	1.07	10F 6G	400	POA
	C576HXG	2.3	1.55	10F 6G	640	POA
Shear Grab	Hardox Tine					
	S220HX	2.20	1.15	16	800	POA
	S190HX	1.90	1.00	14	750	Indent
	S160HX	1.60	0.85	12	460	POA
Silage Fork	Galvanised Frame					
	EGV 160	1.60	0.80	8 X 810 mm	190	POA
Telehandler Buckets	C/W weld on hooks					
	A043-80	2.44	1.22	-	380	POA
	A056-80	2.44	1.6	-	426	POA
	A075-80HD	2.44	2.14	-	735	Indent
Telehandler Bucket Grab						
	A059-80BGHX	2.44	1.64	-	810	POA
Bucket Brush (Fits all bucket types)	Width range or bucket size					
	SB60/80	1980mm - 2210mm				POA
F501 Multi Bale Stacker	Available in Euro or JCBQ hitch					
	F501		1200kg 2x rounds, 3x big square bales	8 x curved 2 x straight	450	POA

Other models available. For a comprehensive range see www.albutt.co.uk

Hardox is considered to be a minimum of 3 times harder than a forged tine. See: www.hardox.com

LINKAGE SPRAYERS



STANDARD FEATURES

Tank	Rotationally moulded polyethylene	Control	4 tap manual or 3 - 5 tap proportional electric control with dump
Frame	Robust galvanised modular frame	Handwash Tank	Included
Pump	Fitted with appropriate Comet diaphragm pump. 20 - 50 bar	Filter	Basket and suction filter included
Link	Pins Category 1 and 2	Driveshaft	Included with all units

	Model Number	Tank litres	Pump	Description	Retail Price excl GST
<i>Manual Control</i>					
	SP-G-C200	200 (including frame)	APS41 40 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	POA
	SP-G-C400	435 (including frame)	APS41 40 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	POA
	SP-G-C600	650 (including frame)	APS41 40 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	POA
	SP-G-C1000	1000 (including frame)	APS71 71 lpm @ 40 bar	4 Tap Manual Control and Handwash Tank	POA
<i>Electric Control</i>					
	SP-GDLH1000	1000 (including frame)	Comet BP125 pump 121 lpm @ 20 bar	3 Tap Electric Proportional Control, Handwash, Venturi Fitting and Step	POA
	SP-GDLH1200	1200 (including frame)	Comet BP125 pump 121 lpm @ 20 bar	5 Tap Electric Proportional Control, Handwash, Venturi Fitting, 125L Flush Tank and Step	POA
	U82200012B	2000 (including frame)	Comet BP125 pump 121 lpm @ 20 bar	15.3" Flotation Wheels (Other options available) Adjust Axle Height, Adjustable Draw Bar, 135L Flush Tank, 3 Section, Electric Proportional Control and Step	POA

Pictured above with optional boom.

*Price by indent only



Add booms, hose reels and foam markers to suit. Other linkage and trailed options available on request.
For a comprehensive range see www.carrarospray.com

SPRAY BOOMS & ACCESSORIES



STANDARD FEATURES

- Manual and hydraulic fold hot dipped galvanised
- All booms have full nozzle protection and safety break back
- 03 air induction nozzles are standard (other options available)
- Nova and work booms are self levelling
- All booms have stainless steel boom tubes and non drip nozzle bodies

	Model Number	Description	Weight kg	Retail Price excl GST
	Manual Spray Booms			
	ETB14N	4m Heavy Duty Manual Fold Boom with No Nozzle Protection	20	POA
	SP-BD560	6m Heavy Duty Manual Fold Boom with Full Nozzle Protection	32	POA
	SP-BD80	8m Heavy Duty Manual Fold Boom with Full Nozzle Protection	42	POA
	SP-BD100	10m Heavy Duty Manual Fold Boom with Full Nozzle Protection	48	POA
	Hydraulic Spray Booms			
	SP-BDI180N	Work 8m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	140	POA
	SP-BDI100N	Work 10m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	150	POA
	SP-BDI120N	Work 12m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	211	POA
	SP-BDIH150	Work 15m Heavy Duty Hydraulic Fold Boom, Self Level, Auto Lock with Full Nozzle Protection	260	POA
	SP-BDIH120N	Hydraulic Height Mast, 1m Travel. Hose Kit for Height Mast above. (Price incl. in height mast)	-	POA
		Hydraulic suspension for Height Mast	-	POA

Accessories	Model Number	Description	Retail Price excl GST
	SP-8394014	Double Sided Foam Marker Kit	POA
	SP-50MHRG	50m Heavy Duty Hose Reel and Gun	POA
	SP-100MHRG	100m Heavy Duty Hose Reel and Gun	POA
	SP-8214007	Bare Heavy Duty Hose Reel	POA
	SP-8282014	Triam Spray Gun	POA
	SP-06632642	10ml 600PSI Gun Hose per 100m Roll	POA
	SP-06632642-cm	10ml 600PSI Gun Hose per metre	POA
	SP-06632659	13ml 600PSI Gun Hose per 100m Roll	POA
	SP-06632659-cm	13ml 600PSI Gun Hose per metre	POA

ORCHARD SPRAYERS



STANDARD FEATURES

Tank	Rotationally moulded polyethylene	Control	Manual or 2 section electric
Frame	Robust galvanised modular frame	Handwash Tank	Included
Pump	Fitted with appropriate Comet diaphragm pump. 50 bar	Flush Tank	Included
Link	Pins Category 1 and 2 where applicable	Filter	Basket and suction filter included
		Driveshaft	Included with all units

	Model Number	Tank litres	Pump	Control	Description	Retail Price excl GST
	APL 400 700m fan	400	APS51 51 lpm @ 50 bar	Manual	400L linkage Air Blast Sprayer. Comet ARS51 pump, manual control. Hand wash and flush tank. 700m fan 1 speed gearbox with neutral	POA
	APL 600 700m fan	600	APS96 96 lpm @ 50 bar	Electric	600L linkage Air Blast Sprayer. Comet ARS96 pump, 2 section electric controls. Hand wash and flush tank. 700m fan with single nozzle body	POA
	APT 2000 900m fan	2000	APS145 141 lpm @ 50 bar	Electric	2000L trailed Air Blast Sprayer. Comet ARS145 pump, 2 section electric controls. CV Shaft. 2 speed gearbox. Hand wash and flush tank. 15.3" wheels. 900m fan with adjustable vanes	POA



Add booms, hose reels and foam markers to suit. Other linkage and trailed options available on request. For a comprehensive range see www.carrarospray.com

HYDRAULIC PICK UP HITCH

DROMONE Hydraulic Push Back Pick Up Hitches are manufactured in Ireland and are considered among the strongest and safest on the market. Mounted directly to the tractor's back end, they make use of the tractor's own weight to enhance stability, all while giving the operator superior visibility of the hook and trailer ring from the cab.

Hydraulic rear hitches available for **Case, Claas, Fendt, John Deere, Massey Ferguson, McCormick, New Holland, Same and Deutz Fahr.**

Vertical hitches available for **Telehandlers.**



	Description	Retail Price excl GST
	Tractors with 0HP - 140HP	POA
	Tractors with 141HP - 170HP	POA
	Tractors with 171+ HP	POA
	Vertical Hitch for Telehandler	POA
<i>Please Note: Some tractor models require additional equipment. This is not included in the price. Please ask for details.</i>		

IMPLEMENTS

	Description	Retail Price excl GST
Pallet Forks		
	2500kg lift capacity. Ratchet lateral fork width adjustment, complete with euro hitch or JCBQ fit. Range of pallet forks to suit machines from 6 to 32 tonnes. The Pallet Fork gives your loader all the material handling capability of a telehandler.	Euro POA
		JCBQ POA
Ball and Spoon		
	90% less wear and hitch damage compared to traditional towing rings, reducing operating costs. The Dromone Ball and Spoon Coupling offers the quietest towing experience when compared to conventional hook & ring systems. Available for all tractor makes and models.	POA



Fitting service provided, call for pricing.

Other models available. For a comprehensive range see www.dromone.com

AUGER BUCKET



	Part Number	Width metres	Capacity m ³	Weight kg	Retail Price excl GST
 <i>Discharge of food: Beet/Vegetable Chopper Model.</i>	<i>Extension Shute and Bolted Buckets for front loaders and telehandlers are included in the price.</i>				
	GAVV1220	2.20	1.30	510	POA
	GAVV2240	2.40	1.90	741	Indent
	GAVV1220RC*	2.20	1.30	-	Indent
	<i>Additional add-ons</i>				
	EMI2VC	Left or right discharge			POA
	ROTO FOR BUCKET	Including 2 rams			Indent
	HYDRAULIC GRAB	Including 2 rams			Indent



FIXED ROTOR BUCKET / HAY & STRAW BLOWER

Fixed Rotor Bucket	<i>Euro Hitch or Telehandler Hitch</i>				
	ACTGRF1210	2.1m	1.4 Cube	600kg with Euro	POA
	ACTGRF1230	2.3m	1.5 Cube	620kg with Euro	POA
	ACTGRF2230	2.3m	1.9 Cube	740kg with JCBQ	POA
	ACTGRF2250	2.5m	2.0 Cube	760kg with JCBQ	POA
Hay & Straw Blower					
	SIGMA Hay & Straw Blower	270° hydraulic discharge. Round or square bales. Hydraulic walking floor feed. 2 speed gearbox. Hay, straw or day/dry silage.			POA

Other models available. For a comprehensive range see www.emily.fr

DUAL WHEELS



Tractor Wheel	Dual Size
<i>Duals are priced on enquiry and include tyres, painted rims, clamps, and freight. Other sizes and configurations available on request.</i>	
710/65R42	320/90R54
710/70R38	-
650/65R42	300/95R52
580/70R42	420/80R46
520/85R42	20.8R42
20.8R42	-
650/65R38	13.6R48
580/70R38	14.9R46
520/85R38	20.8R38
20.8R38	-
600/65R38	12.4R46
520/70R38	18.4R38
460/85R38	-
18.4R38	-
540/65R38	11.2R46
480/70R38	16.9R38
420/85R38	-
16.9R38	-
520/70R34	11.2R44
460/85R34	14.9R38
18.4R34	18.4R34

Clamp Options	Description	Part Number	Retail Price excl GST
CLAMP: MD+ / MD	MD4-Plus Box M16x1.5 Clamp Set	495569	POA
CLAMP: HD+ / HD	MD6-Plus Box M16x1.5 Clamp Set	495583	POA
	HD4-Plus Box M18x1.5 Clamp Set	495958	POA

POSILUX KITS



Description	Part Number	Retail Price excl GST
Posilux. Positioning overwidth light kits (including double sided hazard panels)	1701010	POA

GRASSLAND HARROW & GREENKEEPER



	Part Number	Description	Width metres	Weight kg	Retail Price excl GST
Grassland Harrow	<i>Corner security - D Shackle for quick changing of nets - Mechanical blockage of cylinders Skids - Linkage Cat. 2 suitable for catch hooks - Transport Width 231cm - 4 rows Heavy, cast-iron elements can be used from both sides - Galvanised Frame</i>				
	Z01-0011	Hydraulic	5	635	Indent
	Z01-0012	Hydraulic	6	715	POA
	Z01-0013	Hydraulic	8	835	Indent
	Accessories				
	Seeder	Electronic Driven, Pneumatic Seeder, Capacity 300L, Includes Control Box with dosage by Radar			POA
Greenkeeper	<i>Galvanized frame - 10 mm teeth (3 rows) - 12-stage depth adjustment - Skids 2 Cylinders with transport lock - Very heavy linkage Cat. 2 suitable for catch hooks</i>				
	Z01-0022	Hydraulic	6	575	POA
	Z6MPLUSGK	Hydraulic	6	830	POA
	Accessories				
	Seeder (incl. assembly)	Electronic Driven, Pneumatic Seeder, Capacity 300L, Includes Control Box with dosage by Radar			POA
	Z300 ISOBUS or TOPCON	ISOBUS or TOPCON control, Simple visible operation via main screen, capacity 300L, 450L available on indent			POA
	Seeder 450 Litre	Electronic Driven, Pneumatic Seeder, Capacity 450L, Includes Control Box with dosage by Radar			POA
	Mounting Kit	Mounting kit for Greenkeeper or Harrow, includes steps			POA

BALE CLAMP & MODULAR RUBBER SCRAPER

	Weight kg	Description	Retail Price excl GST
Bale Clamp	Euro Brackets		
	300	Galvanized clamp. Suitable for bales from 70cm to 245cm Linkage of choice, mounted with bolts. 2 Cylinders	POA
		Optional 550mm extension	POA
		Bolt on JCBQ hooks in lieu of Euro	POA
Modular Rubber Scraper	Model		
	RS-S300	3m adjustable width - Euro and 3 point linkage hitch - Steel reinforced rubber replaceable blade - European galvanised steel	POA
		Hydraulic Angle Kit	POA
	1.95m	3 Point heavy duty hydraulic drive sweeper mechanical width adjustment, nylon 600mm brush 300mm pneumatic wheels	POA
	2.4m		POA

For a comprehensive range see www.zocon.eu

TIPPING TRAILERS



Product Code	Size tonnes	Max Weight kg	Loading Capacity kg	Bucket Dimension cm	Trailer Weight kg	Power Demand HP	Loading Platform Height cm	Tipping Angle	Retail Price excl. GST
Z045	4.5	5700	4500	340 x 180 x 40	1200	45 - 75	96	50°	POA
BASIC EQUIPMENT: Self closing backdoor - Automatic lock system backdoor - Removable side boards - Lighting - Support wheel Turnable hitch ø 45 - Under and upper drawbar - Frame + side boards galvanized - Tipping system 1 side - Thickness bottom: 4mm Thickness sideboards: 2mm									
Z080	8	POA	8000	450 x 220 x 60	2300	60	106	50°	Indent
BASIC EQUIPMENT: Automatic, hydraulic locksystem backdoor - Mechanical locksystem sideboards - Lighting - Support Turnable hitch ø 45 - One side tipping (backwards) - Tandem (bogie), Tyres: 11.5/80x15 - Under and upper drawbar Upper- under frame and load platform galvanized - Removable side boards - Thickness bottom: 4mm - Thickness sideboards: 2mm									
Z100	10	POA	POA	450 x 220 x 60	2700	80	106	50°	Indent
BASIC EQUIPMENT: Automatic, hydraulic locksystem backdoor - Lighting - Support - Turnable hitch ø 50 - One side tipping (backwards). Tandem (bogie, parabolic suspension), Tyres: 15/55x17 - Under and upper drawbar - Upper- under frame and load platform galvanized. Removable side boards - Thickness bottom: 4mm - Thickness sideboards: 2mm									



For a comprehensive range see www.zocon.eu

ACCESSOIRES



TELESCOPIC TOP LINK CAT. 2

For attachments in floating
Position better ground following
Easier coupling
Lockable



SPINDLE-ADJUSTED TOP LINK

- Cat. 2
- Cat. 2 strengthened
- With catch hook cat. 2
- With catch hook cat. 3 lubricable




HYDRAULIC PIVOT LINKS CAT. 2

FUNCTIONS Double-sided panning
Easier obstacle avoidance
Workspace shift
Curve function
Direction correction on a Slope
Turning radius reduction

CONTROL Individually
Intuitive
Foresighted

STANDARD VERSION Hydraulic pivot links with hydraulic connection lines
Connecting rod
Spindle top link with joint

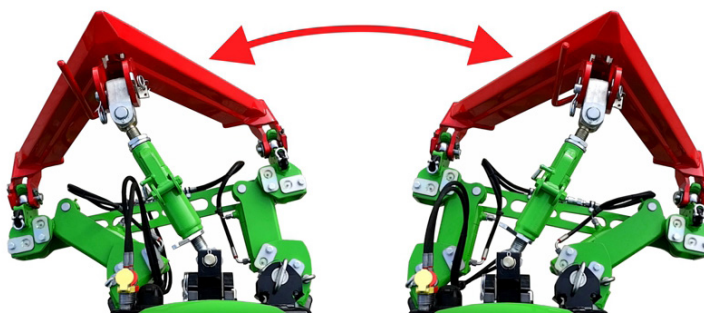

TRACTOR TRIANGLE CAT. 2

Easier coupling thanks to new form
Optimised coupling points for top links
New design for lower end
Strong, well-shaped design with a high-stiffness profile
Wearing parts like hook and springs can be exchanged
Turning point and shape of hook optimised
Integrated lock against rotation in lower link bracket
Compatible with implements up to 1500 kg





	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
5E T3							
Linkage	2300	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	42kW / 57HP		POA
Complete							POA
5 GF / GN / GV							
Linkage	2500	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
5 GL							
Linkage	2000	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
5 G / GH							
Linkage	2500	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
5R / M							
Linkage	2800	Double	Cat.3-2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
6 RC / MC / R / M 4 CYL							
Linkage	3500	Double	Cat.3-2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
6140 M - 6195 M / 6140 R - 6215 R 6M 145 - 6M 250 / 6R 165 - 6R 215							
Linkage	4500	Double	Cat.3-2	–	–		POA
PTO HZ	124mm below crankshaft			1000	110kW / 150HP		POA
PTO TA*	186mm below crankshaft			1000	110kW / 150HP		POA
PTO HWC*	(with cooler) 246mm below crankshaft (NOT 6M)			1000	125kW / 170HP		POA
Complete HZ							POA
Complete TA							POA
Complete HWC							POA
*Recommended for wheel size 30" rims for PTO output shaft position							
6230 6250 R / 6R 230 - 6R 250							
Linkage	5000	Double	Cat.3-2	–	–		POA
PTO	(with cooler)			1000	110kW / 150HP		POA
Complete							POA
7200 R - 7280 R / 7210 R - 7310 R (MY14) 7RMY20							
Linkage	5000	Double	Cat.3-2	–	–		POA
PTO	(with cooler)			1000	110kW / 150HP		POA
Complete							POA
8000 R (No PTO option)							
Linkage with ILS	5000	Double	Cat.3-2	–	–	–	POA
Linkage without ILS	5000	Double	Cat.3-2	–	–		POA
8R (MY20) (No PTO option)							
Linkage with ILS	6000	Double	Cat.3-2	–	–	–	POA
Linkage without ILS	6000	Double	Cat.3-2	–	–		POA

Accessories	Retail Price excl GST
SAUTER Tractor Triangle (A Frame)	POA
Double Acting Front Remote Kit - 5000 / 6000	POA
Double Acting Front Remote Kit - 7000 / 8000	POA

Attention: Please specify your tractor model, year, and whether it has front suspension or a front-end loader.



	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
Quantum 80-110 V / N / F / CL (T4i) WITHOUT Front suspension							
Linkage	2100	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
Quantum 80-110 V/ N/ F (T4i) WITHFront suspension							
Linkage	2100	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
MAXXUM 110 - 150							
Linkage	3800	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
PUMA SWB							
Linkage	3800	Double	Cat.2-3	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
PUMA LWB, AFS CONNECT - NO PTO SWITCH SUPPLIED, ORDER DIRECT FROM CNH (47849200)							
Linkage	5000	Double	Cat.2-3	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
Side rails to clutch housing - recommended for buckrake or blade							POA

Accessories	Retail Price excl GST
SAUTER Tractor Triangle (A Frame)	POA
Double Acting Front Remote Kit - Quantum / Maxxum / Puma SWB	POA
Double Acting Front Remote Kit - Puma LWB	POA

Attention: Please specify your tractor model, year, and whether it has front suspension or a front-end loader.



	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
T4.80 - 110 V / N / F / LP (T4i) WITHOUT Front Suspension							
Linkage	2100	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
T4.80 - 110 V / N / F (T4i) WITH Front Suspension							
Linkage	2100	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	50kW / 68HP		POA
Complete							POA
T6.120 - 180							
Linkage	3800	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
T7 SWB							
Linkage	3800	Double	Cat.2-3	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
T7 LWB, PLM INTELLIGENCE - NO PTO SWITCH SUPPLIED, ORDER DIRECT FROM CNH (47849200)							
Linkage	5000	Double	Cat.2-3	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
Side rails to clutch housing - recommended for buckrake or blade							POA

Accessories	Retail Price excl GST
SAUTER Tractor Triangle (A Frame)	POA
Double Acting Front Remote Kit - T4 / T6 / T7 SWB	POA
Double Acting Front Remote Kit - T7 LWB	POA

Attention: Please specify your tractor model, year, and whether it has front suspension or a front-end loader.





	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
NEXOS 210 - 250 F / VL / VE (A25, A26, A27) (A45, A46, A47)							
Linkage	2500	Double	Cat.2	—	—		POA
PTO	—	—	—	1000	50kW / 68HP		POA
Complete							POA
ARION 410 - 460 (A21) (A32, A43) (A52, A53)(A72, A73)							
Linkage	2800	Double	Cat.3-2	—	—		POA
PTO	—	—	—	1000	110kW / 150HP		POA
Complete							POA
ARION 510 - 550 (A18) (A34, A35) (A74, A75) (A94, A95)							
Linkage	3800	Double	Cat.3-2	—	—		POA
PTO	—	—	—	1000	110kW / 150HP		POA
Complete							POA
ARION 610 - 646 (A19, A20) (A36, A37) (A76, A77) A96, A97)							
Linkage	3800	Double	Cat.3-2	—	—		POA
PTO	—	—	—	1000	110kW / 150HP		POA
Complete							POA
AXION 810 - 870 (A40, A41) A50, A51) (A60, A61)							
Linkage	6000	Double	Cat.3-2	—	—		POA
PTO	—	—	—	1000	125kW / 170HP		POA
Complete							POA

Accessories	Retail Price excl GST
SAUTER Tractor Triangle (A Frame)	POA
Double Acting Front Remote Kit - NEXOS / ARION 400/500/600	POA
Double Acting Front Remote Kit - AXION 800	POA

Attention: Please specify your tractor model, year, and whether it has front suspension or a front-end loader.





	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
Series 6 6115C - 6135C PS / TTV WITH Front Suspension							
Linkage	2800	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	74kW / 100HP		POA
Complete							POA
AGROTRON 6G							
Linkage	3800	Double	Cat.3-2	–	–		POA
PTO TA	–	–	–	1000	110kW / 150HP		POA
Complete							POA
Side rails to clutch housing - recommended for buckrake or blade							POA
Series 6 6160.4 - 6180 PS / RC SHIFT (Stage 5)							
Linkage	4000	Double	Cat.3-2	–	–		POA
PTO HT	–	–	–	1000	110kW / 150HP		POA
Complete							POA
Series 6 6190 - 6230 PS / RC SHIFT (Stage 5)							
Linkage	5000	Double	Cat.3-2	–	–		POA
PTO TA	–	–	–	1000	110kW / 150HP		POA
Complete							POA
Series 6 / 7 / 8 6190 - 6210 - 6230 - 7250 TTV / HD 8280 TTV (Stage 5 Compound)							
Linkage	5000	Double	Cat.3-2	–	–		POA
PTO TA	–	–	–	1000	110kW / 150HP		POA
Complete							POA

Accessories	Retail Price excl GST
SAUTER Tractor Triangle (A Frame)	POA
Double Acting Front Remote Kit - SERIES 5 / 6 / 7	POA

Attention: Please specify your tractor model, year, and whether it has front suspension or a front-end loader.



	Lifting Power at Hooks	Double/ Single Acting	Catch Hooks	Shaft Speed RPM	Max Continuous Power	PTO direction from driving Position	Retail Price excl GST
MF 3707 - 3710 F/S/V							
Linkage	2200	Single	Cat.2	–	–		POA
PTO	–	–	–	1000	55kW / 75HP		POA
Complete							POA
MF 4700 GLOBAL							
Linkage	2800	Single	Cat.2	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
MF 5700 - 6700 GLOBAL / 5700 / 5S							
Linkage	3500	Double	Cat.2	–	–		POA
PTO	–	–	–	1000	110kW / 150HP		POA
Complete							POA
MF 6700 / 6S							
Linkage	3800	Double	Cat3-2	–	–		POA
PTO	–	–	–	1000	125kW / 170HP		POA
Complete							POA
MF 7700 / 7S							
Linkage	4000	Double	Cat3-2	–	–		POA
PTO	–	–	–	1000	125kW / 170HP		POA
Complete							POA
MF 8S							
Linkage	4000	Double	Cat3-2	–	–		POA
PTO	–	–	–	1000	125kW / 170HP		POA
Complete							POA
MF 8400 / 8600 / 8700							
Linkage	5000	Double	Cat3-2	–	–		POA
PTO	–	–	–	1000	125kW / 170HP		POA
Complete							POA

Accessories	Retail Price excl GST
SAUTER Tractor Triangle (A Frame)	POA
Double Acting Front Remote Kit - MF 3700 / 4700 / 5700 / 6700 / 7700 / 5S / 6S / 7S	POA
Double Acting Front Remote Kit - MF 8700 / 8S	POA



Fitting service provided, call for pricing.

FIELDMASTER

FIELDMASTER

PREMIUM FARM EQUIPMENT

70
YEARS
ANNIVERSARY



Kiwi Tough, Since 1955

Fieldmaster has been designing and manufacturing hard-working mowing and fencing gear right here in New Zealand since 1955. Built for kiwi conditions with locally sourced steel—our gear works harder and smarter.

From slashers to mulchers, side-discharge mowers to vineyard specialists, Fieldmaster covers pretty much any cut you need. Orchard strips? Gorse country? Pasture or municipal edges? We've got gear to handle it.

Need to do fencing in uncooperative ground? Our post-driver range brings the heat, from smaller models to high-impact hammers—built durable, driven and dependable.

FIELDMASTER MOWERS	
Rotary Slashers/Brush Cutters:	
Sabre (18-40hp)	33
Sabre Hire Spec (20-50hp)	33
M Series (35-80hp)	33
HD Series (60-100hp)	34
Jumbo (80-250hp)	34
Toppers/Mulchers/Parks Mowers:	
GMT Gear Drive Pasture Topper (40-130hp)	35
GMM Gearmower 3in1 Multicut (40-130hp)	35
GMM HD Mulcher/Slasher/Topper (120-180hp)	36
TM Twin Belt Drive Pasture Topper (40-120hp)	37
PM Parks & PMM Minipark (30-120hp)	37
Vineyard & Orchard Mowers:	
GML Series: 2-in-1 Mulcher/Mower (30-130hp)	38
GMS Series: Side Discharge Mower (30-130hp)	39

FIELDMASTER POST DRIVERS	
Farmer	40
Fencer	40
Forté	40
Hydraulic Rockspike Extractor	40
Hydrasideshift Base	41

Looking for finishing mowers, mulchers or rotary hoes that punch above their weight? Cosmo Bully's got you. Italian designed, built in a giant facility in India. These attachments deliver serious cut, speed, and reliability. Efficient to operate. Affordable to own.

When you need precision without overkill, Glaber's compact machines come to the rescue. Drum mulchers, wood chippers, box scrapers and post hole borers. All engineered for nimble performance and long life, especially when space or finesse matters most.

FIELDMASTER ATTACHMENTS	
Grapple	42
COSMO BULLY	
Drum Mulchers/Finishing:	
Finishing Mower (25-60hp)	43
Drum Mulcher Light (15-50hp)	44
Drum Mulcher Medium (30-70hp)	45
Drum Mulcher Heavy (60-100hp)	46
Rotary Hoes:	
Rotary Hoe Light (15-50hp)	47
Rotary Hoe Medium (50-90hp)	48

GLABER	
VC-40 PTO Driven Woodchipper	49
VC-60R PTO Driven Woodchipper	49
Ezy-Bore 40 Post Hole Borer - Cat. I	49
Ezy-Bore 80 HD Post Hole Borer - Cat. I & II	49
SBX Box Scrapers / Blade	50
ATV Tow Flail Drum-Mulcher	50

TERMS & CONDITIONS	
Terms & Conditions of Sale	51
Indent Orders	51

Sabre – Sabre Hire Spec – M Series

Fieldmaster offers a robust range of slashers and mowers designed for various property sizes and tractor power levels.

The Sabre Series, available in 1200 and 1500 models, is ideal for small blocks and lifestyle properties, suited for tractors from 18-40hp. Built tough with quality components, these slashers can be upspiced for cleaner finishes.

The Sabre Hire Spec, a heavy-duty 1.5m model, is tailored for the hire industry and higher horsepower compact tractors (20-50hp). It features a 50hp gearbox, collapsible headstock, and rear safety guard as standard, with optional upgrades for enhanced performance.



For larger lifestyle blocks and farms, the M Series—comprising of the M60 and M70—caters to tractors from 35-80hp. Constructed with a 5mm thick mowing deck and built for longevity, the M Series also offers optional upgrades for superior finishing. Across all models, Fieldmaster provides economical, durable solutions for cutting grass and managing overgrowth.

Code	SABRE1200	SABRE1500	SABREHS1500	M60	M70
Description	Single Rotor				
Transmission	Gear Drive				
Gearbox	40hp, 540rpm		50hp, 540rpm	80hp, 540rpm	
PTO Shaft/Clutch	Series 4	Series 4 Pin Clutch	Series 6 Pin Clutch	Series 6	
Skids	Height Adjustable				
Cut Range (mm)	10 - 85				10 - 95
Finish	Powder Coated				
Deck (mm)	5mm			6mm	
Cutting Size (mm)	Up to 25mm			Up to 35mm	
Type of Blade	Stepped Axe Flail				
No. of Blades	2				
Tower Position/Offset	Fixed/Bolt on Headstock with 150mm Manual Offset		Folding Headstock	Fixed/bolt on Headstock with 150mm Manual Offset	
Linkage	Cat 1 - Floating		Cat 1 & 2 (bushes for Cat 2) - Floating		
Guarding	Available, see upgrades		Rear Deflector	Available, see upgrades	
Overall Height (mm)	750		820	850	
Overall Depth (mm)	1290	1580	1720	1620	1980
Overall Width (mm)	1220	1525	1525	1690	1950
Cutting Width (mm)	1050	1380	1490	1490	1720
Tractor Range (Hp)	18 - 40		20 - 50	35 - 80	
Weight (kg)	150	210	250	350	480
Price - ex GST	POA	POA	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing				
4 Blades	POA	POA	POA	POA	POA
Gold Tip Kit - 2 or 4 Blade	POA	POA	POA	POA	POA
Full Width Roller Kit	POA	POA	POA	POA	POA
Friction Clutch	POA	POA	POA	POA	POA
Pin Clutch	POA	Fitted	Fitted	N/A	N/A
Hot Skid per pair (weld on)	POA	POA	POA	POA	POA
Grass Flow Vane	POA	POA	POA	POA	POA
Front or Rear Safety Skirt	POA	POA	POA	POA	POA

HD Series – Jumbo

The Fieldmaster HD Series Slasher and Jumbo Slasher are heavy-duty rotary mowers designed for powerful performance in tough conditions.

The HD Series, available in HD60 and HD70 models, suits tractors from 60-100hp and features a robust twin-laminate 6mm deck, 10mm thick axe flails, front chain guards, and adjustable skids—ideal for clearing thick scrub and gorse. Optional extras allow customization to meet specific needs.

For even greater power, the Jumbo Slasher handles tractors from 80-230hp and has proven itself across New Zealand by breaking in vast areas of agricultural land. It features a 1000Rpm heavy-duty gearbox and a 16mm flail plate paired with four 16mm thick hardened spring steel blades, delivering massive impact force to clear even the most challenging terrain.

Code	HD60	HD70	JUMBO
Description	Single Rotor		
Transmission	Gear Drive		
Gearbox	100hp, 540rpm		250hp, 1000rpm
PTO Shaft/Clutch	Series 8		Series 9
Skids	Height Adjustable		
Cut Range (mm)	20 - 120		30 - 120
Finish	Powder Coated		
Deck (mm)	6mm Laminated		10mm
Cutting Size (mm)	Up to 50mm		Up to 100mm
Type of Blade	Stepped Axe Flail		Straight 16mm Axe Flail
No. of Blades	2		4
Tower Position/Offset	Fixed/Bolt on		Fixed/Welded
Linkage	Cat 2 - Floating		
Guarding	Front Chain Guard		
Overall Height (mm)	1160		1580
Overall Depth (mm)	1820	2090	2100
Overall Width (mm)	1710	1950	2000
Cutting Width (mm)	1400	1790	1720
Tractor Range (Hp)	60 - 100		80 - 250
Weight (kg)	550	650	850
Price - ex GST	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing		
4 Blades	POA*	POA*	Free***
Full Width Roller Kit	POA**	POA**	N/A
Friction Clutch	POA	POA	POA
Cam Clutch	POA****	POA****	POA****
Over Run Clutch	POA	POA	POA
Hot Skid per pair (weld on)	POA	POA	N/A
Rear Safety Chain Skirt	POA	POA	POA

* 4 Blade Mulching Kit • ** Mega Roller Kit • *** 10mm Stepped Axe Flail • **** 2009/1200 (HD60/70) - 3009/1200 w/ Overrun (JUMBO)



GMT Topper - GMM 3in1 Multicut

Fieldmaster's GMT and GMM series mowers are designed and manufactured in New Zealand to deliver durability and performance across a wide range of agricultural tasks.

The GMT Gear Drive Pasture Topper features a robust gear-driven design with 'Gold Tip' blades for a clean, hay mower-like finish, and includes a front rubber safety guard and high-quality European driveshaft with Friction Clutch. It is available in seven widths and suits tractors from 30–130hp.



The GMM Series is a versatile mulcher, slasher, and topper in one, ideal for handling tough vegetation like grain and maize stubble, bull rushes, kikuyu, gorse, and bracken. It comes standard with triple stack blades, front safety chains, and imported gearboxes with cam clutched PTO for all models. Available in seven widths, the GMM series is also compatible with tractors from 30–130hp. Both models are built tough with quality components for long-term service.

Custom Sizes Available upon request 1.6m/1.8m/2m/3.3m - POA

Code	GMT230	GMT270/3RT	GMT300	GMM230	GMM270/3RT	GMM300
Description	Rear Discharge					
Transmission	Gear Drive					
Gearbox	80hp, 540rpm	130hp, 1000rpm		80hp, 540rpm	130hp, 1000rpm	
PTO Shaft/Clutch	Series 8 with Friction Clutch			Series 8 with Cam Clutch		
Skids	Height Adjustable					
Cut Range (mm)	20 - 120					
Finish	Powder Coated					
Deck (mm)	8mm Deck. 12mm Over Braces & Side Profile	5mm Laminated w/ full width under body bracing & over deck gussets		8mm Deck. 12mm Over Braces & Side Profile	5mm Laminated w/ full width under body bracing & over deck gussets	
Cutting Size (mm)	Topping & Light Prunings			Topping, Slashing & Mulching Up to 50mm		
Type of Blade	Gold Tip Topping Blades			Triple Stack Mulching Blades		
No. of Blades	4	6		4	6	
No. of Rotors	2	3		2	3	
No. of Gear Boxes	3					
Tower Position/Offset	Fixed/Bolt on					
Linkage	Cat 2 - Floating					
Guarding	Front Safety Skirt			Front Safety Chains & Rear Mulching Panel (removable)		
Overall Height (mm)	1050					
Overall Depth (mm)	1650	1530	1530	1650	1530	1530
Overall Width (mm)	2445	2885	3145	2445	2885	3145
Cutting Width (mm)	2280	2680	2980	2280	2680	2980
Tractor Range (Hp)	40 - 80	70 - 130		40 - 80	70 - 130	
Weight (kg)	750	800	820	790	860	880
Price - ex GST	POA	POA	POA	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing					
Gold Tip Kit	Fitted	Fitted	Fitted	POA	POA	POA
Axe Flail Kit	N/A	N/A	N/A	POA	POA	POA
Full Width Roller Kit	POA	POA	POA	POA	POA	POA
Friction Clutch	Fitted	Fitted	Fitted	N/A	N/A	N/A
Cam Clutch - 2009/1200	POA	POA	POA	Fitted	Fitted	Fitted
Hot Skid per pair (weld on)	POA	POA	POA	POA	POA	POA
Rear Safety Skirt	POA	POA	POA	POA	POA	POA
Rear Safety Chain Skirt	POA	POA	POA	POA	POA	POA
Front Safety Chain Skirt	POA	POA	POA	Fitted	Fitted	Fitted
HD Anti Scalp Dome - Each	POA	POA	POA	POA	POA	POA

GMM HD Mulcher/Slasher/Topper

The GMMHD series is a multipurpose tractor mulcher, slasher and topper all in one.

The GMM series of mowers are fitted standard with triple stack blades and front safety chains as standard, complete with imported gearboxes and cam clutch on all 3 spindle models, ensures it is built tough with quality components for years of service.

Available in 3 different widths this mower is suitable for tractors ranging in horsepower from 120-180hp. The GMMHD series is great for mulching grain, maize silage stubble, bull rushes, kikuyu, gorse, bracken and topping.



Code	GMMHD270/3RT		GMMHD300	GMMHD330
Description	Rear Discharge			
Transmission	Gear Drive			
Gearbox	180hp, 540rpm			
PTO Shaft/Clutch	Series 8 with Cam Clutch			
Skids	Height Adjustable			
Cut Range (mm)	20 - 120			
Finish	Powder Coated			
Deck (mm)	5mm Laminated w/ full width under body bracing & over deck gussets			
Cutting Size (mm)	Topping, Slashing & Mulching Up to 50mm			
Type of Blade	Triple Stack Mulching Blades			
No. of Blades	6			
No. of Rotors	3			
No. of Gear Boxes	3			
Tower Position/Offset	Fixed/Bolt on			
Linkage	Cat 2 - Floating			
Guarding	Front Safety Chains & Rear Mulching Panel (removable)			
Overall Height (mm)	1050			
Overall Depth (mm)	1530	1530	1530	1530
Overall Width (mm)	2885	3145	3365	3365
Cutting Width (mm)	2680	2980	3280	3280
Tractor Range (Hp)	120 - 180			
Weight (kg)	920	990	1040	1040
Price - ex GST	POA	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing		
Gold Tip Kit	POA	POA	POA
Axe Flail Kit	POA	POA	POA
Full Width Roller Kit	POA	POA	POA
Friction Clutch	POA	POA	POA
Cam Clutch - 2009/1200	Fitted	Fitted	Fitted
Hot Skid - per pair (weld on)	POA	POA	POA
Rear Safety Chain Skirt	POA	POA	POA
HD Anti Scalp Dome - Each	POA	POA	POA

FIELDMASTER MOWERS • Toppers/Mulchers/Parks Mowers

TM Toppers - PM Parks - PMM Minipark

Fieldmaster offers a range of high-performance belt driven rotary and parks mowers designed for various applications, all delivering a clean, efficient cut.

The TM Twin Belt Drive Pasture Toppers are ideal for lush pasture management. Featuring wide grass flow vanes, fine mowing 'Gold Tip' blades, adjustable skids, anti-scalping options, and optional rear roller, the TM Series is fully customizable and suitable for tractors rated 40–120hp.

The PM Series Parks Mowers are perfect for maintaining large lawns, parks, sports fields, school grounds and airports. They run on front & rear rollers, and a robust twin belt drive with deep groove pulleys for consistent power.

For lighter-duty work, the PMM Mini Park Mower offers a compact solution, suited for smaller tractors (30–50hp). It runs on front & rear rollers—but uses a single belt drive system with heavy-duty spindles to ensure reliable performance.

Custom Sizes Available upon request - TM210, PM270TR & PM300TR - POA

Code	TM240	TM270	TM300	PM150MT	PM180MT	PM210TR	PM240TR
Description	Rear Discharge						
Belts	4	4	4	2	2	4	4
Transmission	Belt Driven						
Gearbox	120hp, 540rpm			50hp, 540rpm		120hp, 540rpm	
PTO Shaft/Clutch	Series 6			Series 4		Series 6	
Skids	Height Adjustable						
Rollers	N/A			Front & Rear Rollers			
Cut Range (mm)	20 - 120						
Finish	Powder Coated						
Deck (mm)	5mm Laminated						
Cutting Size (mm)	Topping & Light Prunings			Grass/Lawn			
Type of Blade	Gold Tip Topping Blades			Gold Tip Blades			
No. of Blades	6	8	8	6	6	6	6
No. of Spindles	3	4	4	3	3	3	3
No. of Gear Boxes	1						
Tower Position/Offset	Fixed/Bolt on						
Linkage	Cat 2 - Floating			Cat 1 - Floating		Cat 2 - Floating	
Guarding	Front Safety Skirt			N/A		Rear Rubber Safety Skirt	
Overall Height (mm)	1050			1020	1020	1050	
Overall Depth (mm)	1580			1170		1580	
Overall Width (mm)	2540	2840	3170	1550	1850	2240	2540
Cutting Width (mm)	2345	2645	2945	1445	1745	2035	2345
Tractor Range (Hp)	40 - 120			30 - 50		40 -120	
Weight (kg)	600	720	780	290	350	550	650
Price - ex GST	POA	POA	POA	POA	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing						
Full Width Roller Kit	POA	POA	POA	N/A	N/A	N/A	N/A
Friction Clutch	POA	POA	POA	POA	POA	POA	POA
Hot Skid - per pair (weld on)	POA	POA	POA	N/A	N/A	N/A	N/A
Rear Safety Skirt	POA	POA	POA	N/A	N/A	N/A	N/A
Anti Scalp Dome - Each	POA	POA	POA	N/A	N/A	N/A	N/A



GML Series - 2-in-1 Mulcher/Mower


The Fieldmaster range of GML mowers is available in 8 widths and offers a huge range of modular options which ensures you receive a machine suitable for your specific vineyard or orchard conditions.

Supplied standard as a mulching mower with front stubbie rollers, rear roller with our specially designed 'triple-stack' blades which provide a finely chopped mulch material.

Synchronised blade overlap also allows for excellent turning circles and manoeuvrability in restricted areas and headlands. Suitable for tractors 30-130hp.

Custom Sizes Available upon request - 1.4m & 3.3m - POA

**NEW ZEALAND
MADE**

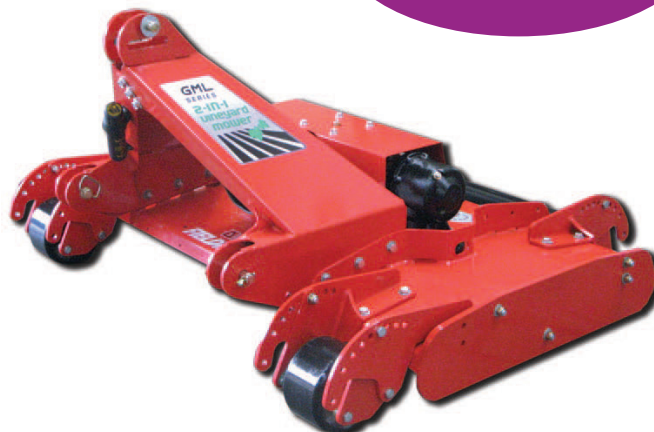

Code	GML160HD	GML180HD	GML200HD	GML230HD	GML270/3RT	GML300
Description	Rear Discharge					
Transmission	Gear Drive					
Gearbox	80hp, 540rpm				130hp, 1000rpm	
PTO Shaft/Clutch	Series 8 w/ Cam Clutch					
Skids	Removable Side Blanking Plates					
Rollers	Front Stubbie & Rear Mega Roller (220 Dia.) - with maintenance free bearing system					
Cut Range (mm)	20 - 100					
Finish	Powder Coated					
Deck (mm)	8mm Deck - 12mm Over Braces & Side Profile				5mm Laminated w/ full width under body bracing & over deck gussets	
Cutting Size (mm)	Grass & Mulching up to 50mm					
Type of Blade	Triple Stack Mulching Blades					
No. of Blades	4	4	4	4	6	6
No. of Rotors	2	2	2	2	3	3
No. of Gear Boxes	3					
Tower Position/Offset	Fixed/Bolt on					
Linkage	Cat 2 - Floating					
Guarding	Front Safety Skirt & Removable Rear Mulching Vane					
Overall Height (mm)	950	950	950	950	950	950
Overall Depth (mm)	1580	1620	1655	1720	1655	1655
Overall Width (mm)	1630	1840	2040	2340	2765	3065
Cutting Width (mm)	1580	1780	1980	2280	2680	2980
Tractor Range (Hp)	30 - 80	30 - 80	30 - 80	40 - 80	70 - 130	70 - 130
Weight (kg)	650	720	780	820	880	920
Price - ex GST	POA	POA	POA	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing					
Front Castor Wheel Kit	POA	POA	POA	POA	POA	POA
Front & Rear Castor Wheel Kit	POA	POA	POA	POA	POA	POA
Gold Tip Kit	POA	POA	POA	POA	POA	POA
Axe Flail Kit	POA	POA	POA	POA	POA	POA
Rear LH CornerSafety Chain Skirt	POA	POA	POA	POA	POA	POA
Rear RH CornerSafety Chain Skirt	POA	POA	POA	POA	POA	POA
HD Anti Scalp Dome - Each	POA	POA	POA	POA	POA	POA

GMS Series - Side Discharge Mower

The Fieldmaster range of GMS side discharge tractor mowers are available in 8 different widths.

A huge range of modular options including wheels and rollers are available which ensures you receive a machine suitable for your specific vineyard or orchard conditions. Supplied standard as a side discharge mower with front stubbie rollers, rear roller and with our specially designed heavy duty axe blades which provide a significant hitting force obliterating pruning's, trimmings and discharging the material out to the side of the mower and back under the rows. This provides an organic mulch and reduces the need for harmful sprays.

Synchronised blade overlap also allows for excellent turning circles and manoeuvrability in restricted areas and headlands. Suitable for tractors 30-130hp.



Custom Sizes Available upon request - 1.4m & 3.3m - POA

Code	GMS160HD	GMS180HD	GMS200HD	GMS230HD	GMS270/3RT	GMS300
Description	Side Discharge					
Transmission	Gear Drive					
Gearbox	80hp, 540rpm				130hp, 1000rpm	
PTO Shaft/Clutch	Series 8 w/ Cam Clutch					
Skids	None					
Rollers	Front Stubbie & Rear Mega Roller (220 Dia.) - with maintenance free bearing system					
Cut Range (mm)	20 - 100					
Finish	Powder Coated					
Deck (mm)	8mm Deck - 12mm Over Braces & Side Profile				5mm Laminated w/ full width under body bracing & over deck gussets	
Cutting Size (mm)	Grass & Slashing					
Type of Blade	Axe Flail					
No. of Blades	4	4	4	4	6	6
No. of Rotors	2	2	2	2	3	3
No. of Gear Boxes	3					
Tower Position/Offset	Fixed/Bolt on					
Linkage	Cat 2 - Floating					
Guarding	Front Safety Skirt					
Overall Height (mm)	950	950	950	950	950	950
Overall Depth (mm)	1580	1620	1655	1720	1655	1655
Overall Width (mm)	1610	1816	2016	2316	2741	3041
Cutting Width (mm)	1580	1780	1980	2280	2680	2980
Tractor Range (Hp)	30 - 80	30 - 80	30 - 80	40 - 80	70 - 130	70 - 130
Weight (kg)	620	690	760	790	850	890
Price - ex GST	POA	POA	POA	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing					
Front Castor Wheel Kit	POA	POA	POA	POA	POA	POA
Front & Rear Castor Wheel Kit	POA	POA	POA	POA	POA	POA
Gold Tip Kit	POA	POA	POA	POA	POA	POA
Mulching Kit (Vane, Blades, Side Plates)	POA	POA	POA	POA	POA	POA
Rear LH CornerSafety Chain Skirt	POA	POA	POA	POA	POA	POA
Rear RH CornerSafety Chain Skirt	POA	POA	POA	POA	POA	POA
HD Anti Scalp Dome - Each	POA	POA	POA	POA	POA	POA

FIELDMASTER POST DRIVERS

Farmer - Fencer - Forté

Fieldmaster offers a range of post drivers tailored to various farming needs, from lifestyle blocks to large-scale operations.

The Farmer series is our entry-level model, ideal for small beef and dairy farms. It features a 180kg hammer and main lift ram, making light fencing jobs simple, with optional extras like hydraulic top link kits, side tilt kits, and side mounting frames.

The Fencer series is New Zealand's most popular choice among beef and dairy farmers, known for its durability and efficiency. It includes a 230kg hammer with an 8:1 rope-pulley system for faster hammer drop and a Tri-beam mast that's 110% stronger

than standard beams. Standard features include hydraulic top link, hydraulic side tilt and main lift ram, with optional upgrades such as hydraulic rock spikes and a hydraulic 4.5m folding mast.

For the most demanding tasks, the Forté series delivers heavy-duty performance with a 320kg hammer, a robust offset base frame for stability, and oversize hydraulic cylinders for smooth mast movement. Designed to handle New Zealand's toughest conditions, it also supports advanced options like hydraulic rock spikes and a hydraulic 4.5m folding mast. All three models operate on a minimum hydraulic oil flow of 16 litres per minute and use a closed-circuit hydraulic valve system.

Code	FARMER	FENCER	FORTÉ
Description	Post Driver	Post Driver	Post Driver
Hydraulic Flow	16 ltr/minute minimum		
Stability	Support Leg	Support Leg	Support Leg
Valve Bank Min.	3	4	4
Hammer kg	180	230	320
Hammer Wire Ratio	Ratio 8:1	Ratio 8:1	Ratio 8:1
Top Link	Manual	Hydraulic	Hydraulic 3'x1.5' Rams
Side Angle	Manual	Hydraulic	Hydraulic 3'x1.5' Rams
Post Cap	Hardwood	Hardwood	HD Polyethelene
Top Pulleys	2	2	3
3 Point Linkage	CAT I/II	CAT I/II	CAT I/II
Overall Height (mm)	4255	4255 - TRI-BEAM	4430 - HD TRI-BEAM
Overall Depth (mm)	670	765	765
Overall Width (mm)	880	960	960
Weight (kg)	550	600	1070
Price - ex GST	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing		
230kg Hammer Upgrade	POA	Fitted	N/A
280kg Hammer Upgrade	N/A	POA	N/A
Hydraulic Top Link Kit	POA	Fitted	Fitted
Hydraulic Side Angle Kit	POA	Fitted	Fitted
HD Polyethelene Post Cap	N/A	POA	Fitted
Closed Circuit Valve Mod Kit (JD)	POA	POA	POA
QRC fitted per valve (slice)	POA	POA	POA
Hydraulic Folding Mast - 4.5m	N/A	POA	POA

Hydraulic Rockspike Extractor

The Fieldmaster Fencer and Forte post drivers can be equipped with factory-fitted rockspike kits.

These kits are specifically designed for convenient operation in the toughest of ground conditions. These kits ensure effortless

performance in the field when dealing with challenging ground conditions, you can request a factory-fitted rockspike that smoothly swings into position, effectively preparing the ground prior to ramming. These kits can also be fitted as an aftermarket kit however must be installed by a qualified engineer.

Hydraulic Rockspike Extractor Kit	N/A	POA	POA
90mm Rock Spike c/w Nylon Cap	N/A	POA	POA
120mm Rock Spike c/w Nylon Cap	N/A	POA	POA

FIELDMASTER POST DRIVERS

Hydrasideshift Base

Fieldmaster offers a wide range of hydraulic side shift bases for post drivers.

The range of varying sizes and compact designs enable these bases to be used on most post driver brands. The specially designed range of vineyard bases was a direct result of working with vineyards who required something different to what the market currently offered!

There is also the option to enable 4-way side shift on these models meaning the unit is able to move both across the back of the tractor and towards and away from the cab. The minimum required hydraulic oil flow for this machine is 16ltrs per minute.



Code	HSS300	HSS300/4W	HSS900	HSS900/4W
Description	Hyd. Side Shift	Hyd. Side Shift - 4 way	Hyd. Side Shift	Hyd. Side Shift - 4 way
Hydraulic Flow	16 ltr/minute minimum			
Stability	Support Leg			
Hitch - 3 pt Linkage	Dual 260mm Offset		Std	
Side Shift - mm	300		900	
Back Shift - mm	-	250	-	250
Coutner Weight Location	Under Frame			
Tool Holder	No		Aluminium	
Overall Height (mm)	1139	1139	1092	1092
Overall Depth (mm)	1036	1036	986	986
Overall Width Closed (mm)	1187	1187	1850	1850
Overall Width Fully Extended (mm)	1487	1487	2750	2750
Weight (kg)	410	450	650	700
Price - ex GST	POA	POA	POA	POA

Code	HSS600	HSS600/4W	HSS600/VY	HSS600/VY/4W
Description	Hyd. Side Shift	Hyd. Side Shift - 4 way	Hyd. Side Shift - Vineyard	Hyd. Side Shift - Vineyard - 4 way
Hydraulic Flow	16 ltr/minute minimum			
Stability	Support Leg			
Hitch - 3 pt Linkage	Std			
Side Shift - mm	600			
Back Shift - mm	-	250	-	250
Coutner Weight Location	Outside Frame		Under Frame	
Tool Holder	Sml		No	
Overall Height (mm)	1095	1095	1130	1130
Overall Depth (mm)	915	915	918	918
Overall Width Closed (mm)	1850	1850	1310	1310
Overall Width Fully Extended (mm)	2450	2450	1910	1910
Weight (kg)	465	515	465	515
Price - ex GST	POA	POA	POA	POA

Available Upgrades	Factory Fitted Only Pricing
Single Bank Valve Kit - Any Model	POA

FIELDMASTER ATTACHMENTS

Grapple

The Fieldmaster Grapple is a versatile, heavy-duty attachment designed to handle virtually any task with your tractor front-end loader, telehandler, or skid steer. Combining the clearing power of a root rake with the versatility of a grab, it delivers unmatched efficiency and strength, making tough work easy.

Developed through years of testing, user feedback, and design refinement, the Fieldmaster Grapple is built tough for professionals who demand dependable equipment. It excels in handling logs, moving rocks, root raking, storm cleanup, and more.

Its unique curved tine design allows the grapple to sit almost flat on the ground, functioning like an extended hand that picks up objects without digging in. This curvature also helps logs roll easily into the grapple. A double clevis hinge system enables a full 180° opening for maximum load capacity,

Durable, reliable, and highly adaptable, the Fieldmaster Grapple is the ultimate solution for demanding jobs.

Code	GRSH1.8EURO	GRSH2.1EURO
Description	HD Grapple	
Hydraulic Flow	16 ltr/minute minimum	
Hitch	EURO	
Width - m	1.8	2.1
Opening - cm	130	
Weight - kg	457	523
Tines - mm	16	
Tine Spacing - mm	150	
Hydraulic Cyclinders - mm	76 x 203	
Price - ex GST	POA	POA



Finishing Mower (25-60hp)

The Cosmo SGM finishing mowers are designed to groom lawn and grass areas professionally.

Three suction type blades turn at a high tip speed giving tender grass a fine sharp cut. Four solid swivel wheels allow the mower to follow the contour of the ground resulting in a precise and level cut in undulating conditions. Cutting height can be adjusted by adding or removing spacers on the caster wheel shafts and an anti-scalping roller is standard.

Attached to the back of a 25-60hp tractor, the SGM finishing mower works efficiently to mow and maintain areas like private lawns, parks, hospital grounds, schools and golf courses.



Code	TSGM150	TSGM180	TSGM210
Description	Bully 1.5m Finishing Mower	Bully 1.8m Finishing Mower	Bully 2.1m Finishing Mower
Transmission	Belt Drive		
Belts	Two (2) B Series		
Gearbox	60hp, 540rpm		
PTO Shaft	Series 4		
Wheels	Solid, 360 degree rotation		
Front Roller	Anti-scalping front roller		
Finish	Powder Coated		
Type of Blade	6mm, high lift, stepped		
No. of Blades	Three (3) double edge, six (6) cutting surfaces		
Tower	Fixed/Bolt on, centre mount		
Linkage	CAT I		
Overall Width (mm)	1620	1920	2220
Working Width (mm)	1520	1820	2120
Cut Range (mm)	20 - 110		
Tractor Range (Hp)	25 - 60	35 - 60	45 - 60
Weight (kg)	225	250	300
Price - ex GST	POA	POA	POA

Transmission

Two belts are configured in an overlapping triangular pattern that allows them to drive all three spindle pulleys.

Wheels


Four, solid 360° rotation wheels allow the mower to follow the contour of the ground resulting in a precise and level cut in undulating conditions.

3-Point linkage - top hitch

The top hitch point enables forward and backward movement, allowing the mower to float over the undulating ground while maintaining a constant cut height.

3-Point linkage - lower hitch

The lower category 1 hitch points feature a double-bolt design, extending compatibility with various tractors and offering the option for rigid or floating configurations.

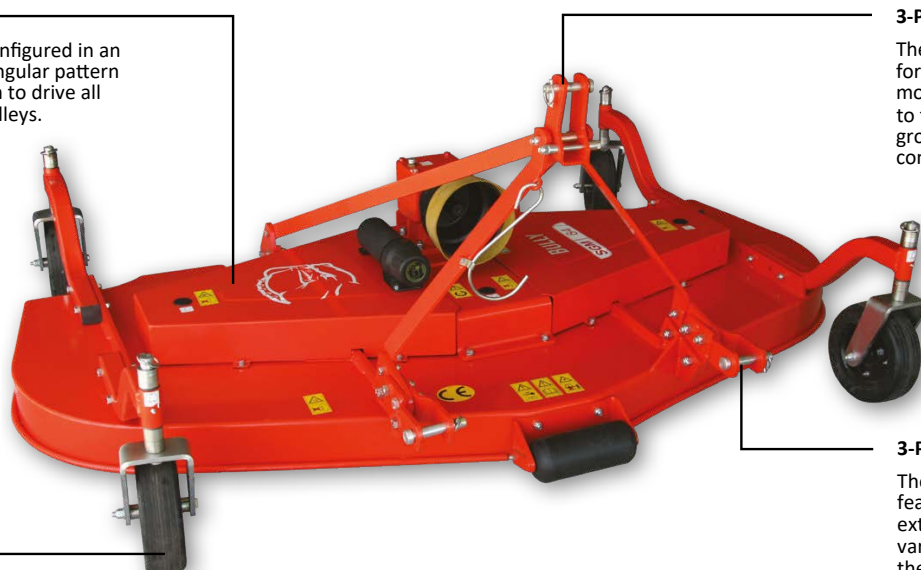

Drum Mulcher Light (15-50hp)

The Cosmo FLS-R Series Flail Mowers are ideal light-duty implements for lifestyle block farmers operating compact and sub-compact tractors between 15 to 35hp.

Designed for safety and durability, front metal deflectors keep debris and material contained beneath the mulcher, protecting both the tractor and operator. Height-adjustable, replaceable skid plates and a rear roller help maintain optimal cutting height, prevent blade contact with the ground, and extend the life of the implement. With a gearbox featuring an incorporated freewheel, the FLS-R Series delivers an impressive 2600 rpm rotor speed, ensuring a clean, efficient cut on lawns, parklands, and smallholding farms.

Complementing the FLS-R is the Cosmo Bully NBM Series Mulcher, a robust and versatile machine designed to tackle more demanding vegetation. Capable of handling material up to 30mm in diameter, it is well-suited for clearing bracken, prunings, and dense undergrowth.

Operating at a rotor speed of POA rpm and equipped with a rear opening flap, the NBM provides excellent performance and adaptability, delivering a high-quality finish on varied grassy areas such as paddocks, parks, and gardens, regardless of grass height.

Code	TFLS-R105	TFLS-R125	TNBM145	TNBM175
Description	Bully 1.05m Mulcher	Bully 1.25m Mulcher	Bully 1.45m Mulcher	Bully 1.75m Mulcher
Side Transmission	Belt Drive			
Belts	Three (3) XPA		Three (3) BX type	Four (4) BX Type
Gearbox	35hp, 540rpm with free wheel clutch		50hp, 540rpm with free wheel clutch	
PTO Shaft/Clutch	Series 4			
Skids	Adustable, three (3) positions		Adustable, four (4) positions	
Rear Roller	102mm Dia., height adjustable		121mm Dia., height adjustable	
Cut Range (mm)	15 - 45		18 - 118	
Finish	Powder Coated			
Rotor Swing Dia. (mm)	280		350	
Rotor Diameter (mm)	76		108	
Rotor Speed (rpm)	2600		2295	
Type of Flail	Hammer			
No. of Flails	18	20	24	28
Tower Position/Offset	Fixed/bolt on with two (2) mounting positions, 100mm apart		Fixed/bolt on with two (2) mounting positions, 210mm apart	
Linkage	Cat I			
Guarding	CE Compliant			
Overall Width (mm)	1230	1430	1685	1985
Working Width (mm)	1050	1250	1450	1750
Tractor Range (Hp)	15 - 35	20 - 35	30 - 50	40 - 50
Weight (kg)	158	170	355	376
Price - ex GST	POA	POA	POA	POA



Drum Mulcher Medium (30-70hp)

The European designed Cosmo SFM-M and SFM-H Series Mulchers are built for tractors 30 to 70hp and deliver a high-quality cut in vineyards, orchards and pastures.

Both the SFM-M and SFM-H Series models feature a series of height-adjustable mulching rakes at the rear of the deck that hold large pruning's (up to Ø 50mm) for maximum mulching.



The SFM-M has a fixed, bolt-on tower with three mounting positions, 150mm apart, allowing the operator to offset the mulcher, while the SFM-H is equipped with a hydraulically side-shifting tower (up to 300mm) for greater flexibility along fence lines or under tree branches and vines. In addition, the SFM-H has a gearbox rating up to 70hp with a built-in freewheel, enabling the rotor to gradually spin down when PTO power is shut off at speed.

Combined with its high-speed rotor, four-belt drive and hammer blades, the SFM-H Series delivers an exceptional cut finish in all working conditions.



Code	TSFM130M	TSFM145M	TSFM160H	TSFM175H	TSFM205H	TSFM220H
Description	Bully 1.3m Mulcher	Bully 1.45m Mulcher	Bully 1.6m Mulcher	Bully 1.75m Mulcher	Bully 2.05m Mulcher	Bully 2.2m Mulcher
Side Transmission	Belt Drive					
Belts	Three (3) BX Type		Four (4) BX Type			
Gearbox	70hp, 540rpm with free wheel clutch					
PTO Shaft/Clutch	Series 4			Series 6		
Skids	Adustable, three (3) positions					
Rear Roller	140mm Dia., height adjustable					
Cut Range (mm)	20 - 105					
Finish	Powder Coated					
Rotor Swing Dia. (mm)	380					
Rotor Diameter (mm)	160					
Rotor Speed (rpm)	2083					
Type of Flail	Hammer					
No. of Flails	16	18	20	22	26	28
Tower Position/Offset	Fixed/bolt on with three (3) mounting positions, 150mm apart		Hydraulic side shift (300mm)			
Linkage	Cat I		Cat I & II (bushes for Cat II)			
Guarding	CE Compliant					
Overall Width (mm)	1450	1620	1770	1920	2220	2370
Working Width (mm)	1300	1450	1600	1750	2050	2200
Tractor Range (Hp)	30 - 70	35 - 70	40 - 70	50 - 70	55 - 70	60 - 70
Weight (kg)	366	388	420	440	485	510
Price - ex GST	POA	POA	POA	POA	POA	POA

Drum Mulcher Heavy (60-100hp)

The European designed Cosmo BPF Series Mulchers are designed for tractors 50 to 100hp and have a tower that hydraulically side shifts.

Like the Cosmo SFM Series Mulchers, the BPF Series Mulchers are fitted with height-adjustable mulching rakes that hold larger pruning's (up to Ø 70mm) in the cutting chamber for mulching in vineyards and orchards.

Additionally, the rear of the Cosmo BPF Series Mulcher deck can be opened to top pastures or when the operator needs to clear the chamber. This function is beneficial when cutting high volumes of material, allowing it to be discharged efficiently without sacrificing speed. Complete with a double skinned deck, side shift, a height adjustable rear roller and hammer blades, this mulcher will produce a high-quality finish.

Code	TBPF160H	TBPF180H	TBPF200H
Description	Bully 1.6m Mulcher	Bully 1.8m Mulcher	Bully 2m Mulcher
Side Transmission	Belt Drive		
Belts	Four (4) XPB type		
Gearbox	100hp, 540rpm with free wheel clutch		
PTO Shaft/Clutch	Series 6		
Skids	Adjustable, two (2) positions		
Rear Roller	165mm Dia., height adjustable		
Cut Range (mm)	20 - 75		
Finish	Powder Coated		
Rotor Swing Dia. (mm)	410		
Rotor Diameter (mm)	170		
Rotor Speed (rpm)	2146		
Type of Flail	Hammer		
No. of Flails	16	16	20
Tower Position/Offset	Hyd. Side shift (400mm)	Hyd. Side shift (337mm)	Hyd. Side shift (437mm)
Linkage	Cat II		
Guarding	CE Compliant		
Overall Width (mm)	1800	2000	2200
Working Width (mm)	1580	1780	1980
Tractor Range (Hp)	60 - 100		70 - 100
Weight (kg)	640	680	735
Price - ex GST	POA	POA	POA



Rotary Hoe Light (15-50hp)

The European designed Cosmo UL and UM Series Rotary Hoes are gear-driven implements engineered for compact tractors.

The UL Series suits tractors up to 40hp. Engineered in Europe, and one of our most popular implements, it is ideal for owner-operators working hobby farms, garden plots or narrow row crops and vineyards.

The UM Series is a gear-driven single-speed hoe specifically designed for 30 to 50hp tractors. and incorporates features and accessories typically found on larger rotary hoes.



Both series use a forward-action rotor fitted with six C-shaped, heat-treated blades per flange in a speed configuration, where the blades are slightly staggered from flange to flange. This design lowers horsepower requirements while delivering a smooth, fine finish across a variety of soil conditions.

Cosmo Bully Rotary Hoes constitute quality manufacturing, features and accessories traditionally only found in high-end implements, making them reliable and practical in various applications.

Code	TBUL48	TBUM60	TBUM72
Description	1.22m Rotary Hoe	1.65m Rotary Hoe	1.83m Rotary Hoe
Side Transmission	Gear Drive		
Gearbox	40hp, 540rpm single speed	50hp, 540rpm single speed	50hp, 540rpm single speed
PTO Shaft/Clutch	Series 4 with 150mm (6") friction clutch		
Skids	Height Adjustable		
Finish	Powder Coated		
Rotor Diameter (mm)	375	434	434
Rotor Speed (rpm)	245	241	241
No. of rotor flanges	6	8	9
No. of Blades / flange	6	6	6
Total no. of blades	36	48	54
Blades	Curved/Speed		
Linkage	Cat I (quick hitch compatible)		
Guarding	Standard with CE guards		
Overall Width (mm)	1340	1775	1970
Working Width (mm)	1220	1650	1830
Working Depth (mm)	165	180	180
Tractor Range (Hp)	20 - 35	30 - 50	35 - 50
Weight (kg)	180	285	310
Price - ex GST	POA	POA	POA

Rotary Hoe Medium (50-90hp)

The Cosmo Bully VH Series Rotary Hoe is a gear driven implement engineered in Europe for tractors 50 to 90hp. It is fitted with a multispeed gearbox that allows the operator to customize the input speed (540/1000rpm) and blade tip speed.

The main frame is a robust and rigid construction with box section reinforcing for the category 2/3 lower linkage mounting points. Square/L blades are mounted in a six blades per flange configuration. This design, where the blades are slightly staggered from flange to flange, prevents the worked soil from

clogging the chamber, reduces blade impact, horsepower requirements and the number of passes required to produce a fine finish in a variety of soil conditions. The VH Series produces a super fine finish, with the spring-loaded tailgate keeping soil inside the chamber and in contact with the blades until it is well pulverised.

Capable of operating all day, every day, in demanding soil conditions the VH Series Rotary Hoe is perfect for a range of commercial agricultural and horticultural applications.

Code	TBVH60	TBVH70	TBVH80
Description	1.54m Rotary Hoe	1.78m Rotary Hoe	2.02m Rotary Hoe
Side Transmission	Gear Drive		
Gearbox	90hp, 540 multi speed (1000rpm option)		
PTO Shaft/Clutch	Series 6 with 200mm (8") friction clutch		
Skids	Height Adjustable		
Finish	Powder Coated		
Rotor Diameter (mm)	521		
Rotor Speed (rpm)	191, 214, 240 or 269 @ 540rpm - 353 or 396 @ 1000rpm		
No. of rotor flanges	6	7	8
No. of Blades / flange	6		
Total no. of blades	36	42	48
Blades	Square/L Shaped Standard		
Linkage	CAT II & CATIII		
Guarding	Standard with CE guards		
Overall Width (mm)	1705	1945	2185
Working Width (mm)	1540	1780	2020
Working Depth (mm)	225		
Tractor Range (Hp)	50 - 90	60 - 90	70 - 90
Weight (kg)	580	620	665
Price - ex GST	POA	POA	POA



VC-40 - VC-60R Woodchipper

The GLABER VC40 and VC60R wood chippers are powerful, efficient tools designed for different tractor power ranges and wood chipping needs.

The VC40 wood chipper is ideal for tractors rated between 15-40hp and is perfect for chipping branches up to 100mm in diameter. Its simple, user-friendly design makes it easy to operate, making the removal of waste wood straightforward and hassle-free.

Code	VC-40	VC-60R
Description	Woodchipper	
Speed - PTO	540rpm	
Drive	Shearbolt PTO	
Branch Chipping Size (mm)	100 (4")	150 (6")
No. of Blades	4	
Discharge	360 deg. Swivel	360 deg. Swivel
Feed	Manual	Hydraulic
Safety Stop	N/A	3 Button - 1 Bar
Finish	Powder Coated	
Tractor Range (Hp)	15 - 40	50 - 80
Weight (kg)	195	505
Price - ex GST	POA	POA

For more demanding tasks, the GLABER VC60R wood chipper is a hydraulically fed machine suitable for tractors with 50-80hp. It features 12" blades and a 360-degree swivel chute, capable of chipping branches up to 150mm in diameter. This model is especially effective for handling hedge trimmings, garden waste, and larger pruning jobs, making it an excellent choice for heavier-duty applications.



Ezy-Bore 40 - Ezy-Bore 80

The Ezy-Bore range of post hole borers offers versatile and durable solutions for a variety of digging needs, with models suited to different tractor sizes.

The Ezy-Bore 40 is ideal for tractors with 18–40hp and is compatible with a selection of New Zealand made & imported augers ranging from 100mm to 300mm in width, making it a practical choice for smaller-scale tasks where precision and efficiency are required.

Code	PHD40	PHD80
Description	Post Hole Borer	
Gear Box	40hp	80hp
Speed - PTO	540 rpm	
Drive	Shearbolt PTO	
3 Pt Linkage	CAT I	CAT II
Finish	Powder Coated	
Tractor Range (Hp)	18 - 40	40 - 80
Weight (kg)	102	155
Price - ex GST	POA	POA

AUGERS - 1.2m High	Additional Price	
100mm Auger	POA	-
150mm Auger	POA	-
225mm Auger	POA	-
300mm Auger	POA	POA
350mm Auger	-	POA
400mm Auger	-	POA
500mm Auger	-	POA
600mm Auger	-	POA

For larger operations, the Ezy-Bore 80 HD is designed for tractors with 40–80hp and supports augers from 300mm to 600mm, ensuring it can handle more demanding jobs with ease. This heavy-duty model features a robust, New Zealand-made frame that undergoes a zinc coating process prior to being powder coated, providing exceptional durability and resistance to corrosion.

With auger options to suit a wide range of applications and construction designed for long-lasting performance, both models are built to deliver reliability and strength in the field.



SBX Box Scrapers / Blade

Box blades are a lot more effective than just a standard scraper/grader blade as the 'boxed in' sides allow for better control and retention of the cut material.

Only in recent years are New Zealanders beginning to realise the advantages of these blades! Heavy duty box scrapers with removable and adjustable front scarifiers for leveling, finish grading and backfilling.



Code	SBX-4	SBX-5	SBX-6
Description	1.2m Box Scraper	1.5m Box Scraper	1.8m Box Scraper
Shanks/Scarifiers	4	5	6
Box Capacity - m3	0.27	0.34	0.41
Front & Back Blades	Y		
Linkage	CAT I		
Finish	Powder Coated		
Overall Width (mm)	1250	1540	1840
Work Width (mm)	1200	1500	1800
Depth (mm)	720	720	720
Height (mm)	920	920	920
Tractor Range (Hp)	15 - 30	20 - 35	25 - 50
Weight (kg)	180	216	226
Price - ex GST	POA	POA	POA

ATV Tow Flail Drum-Mulcher

A handy 'all rounder' to hitch to your ATV, side by side or anything with a tow bar!

The towed drum mulcher is ideal for small lifestyle blocks and is able to tackle those paddocks, driveways and is even capable of mulching small prunings.

Code	AF120
Description	ATV Towed Drum Mulcher
Engine	Petrol, 15hp electric start
Drive	Belt x 3
Type of Flail	Hammer
No. of Flails	24
Finish	Powder Coated
Working Width (m)	1.2
Overall Width (m) Trailing Wheels	1.67
Overall Width (m) Side Wheels	1.94
Overall Depth (m) Trailing Wheels	2.01
Overall Depth (m) Side Wheels	1.88
Height (m)	0.88
Vehicle	Side by Side, Quad Bike
Weight (kg)	225
Price - ex GST	POA



TERMS & CONDITIONS OF SALE

1. All goods supplied by Ag Attachments Limited to the buyer are on the following terms and conditions and by placing an order the buyer expressly accepts these terms and conditions.
2. Payment shall be made by the buyer to Ag Attachments Limited in cleared funds on the 20th of the month following the date of the invoice.
3. Interest may be charged on all overdue accounts at 5% per month. The Buyer will also reimburse Ag Attachments Limited for all costs incurred by Ag Attachments Limited in recovering overdue amounts (including legal costs on a full indemnity basis).
4. Risk in the goods passes to the buyer as soon as the goods leave Ag Attachments Limited premises. Ownership of the goods remains with Ag Attachments Limited and does not pass to the buyer until payment has been made in full to Ag Attachments Limited. Ag Attachments Limited retains the right to enter the buyer's premises and repossess any goods not fully paid for. The buyer grants to Ag Attachments Limited a security interest under the Personal Property Securities Act 1999 (PPSA) in all present and after acquired goods purchased from Ag Attachments Limited and the proceeds of sale of these goods. On request the buyer will sign any document and do anything else required by Ag Attachments Limited to ensure that the security interest created under these terms of trade constitutes a first ranking perfected security interest over the goods supplied. The buyer waives any right to receive a copy of the verification statement under the PPSR.
5. The liability of Ag Attachments Limited for any loss, damage or injury arising directly or indirectly from the supply of the goods to the buyer including lost revenues, lost profit, lost contracts, interest or goodwill and consequential and/or third-party loss whether in contract, or otherwise is limited to the replacement or repair only of any defective goods and all other liability is expressly excluded.
6. No defect in the goods supplied will be covered under warranty unless approved by Ag Attachments Limited prior to work being commenced. Any warranty claim is limited to the warranty provided by the manufacturer of the goods and Ag Attachments Limited provides no further warranties. Unless Ag Attachments Limited agrees otherwise, the liability of Ag Attachments Limited will be to use all reasonable endeavours to ensure that the manufacturer honours its warranty, and all other warranty liability is expressly excluded.
7. All orders must be confirmed in writing clearly by identifying the buyer's name with an order number.
8. Ag Attachment Limited reserves the right to amend the prices and specifications of its goods without notice to the buyer.
9. Ag Attachments Limited is not liable for any delay in delivering goods or supplying services and the supply of goods is subject to availability.

INDENT ORDERS

1. Goods purchased on indent orders are confirmed at receipt of an order signed by the dealer and the Ag Attachments Limited representative.
2. Indent orders are binding on the dealer and may not be cancelled or amended after seven days from receiving an order number or signing.
3. A 15% deposit may be required on special or indent orders.
4. Extra discount may be available at our discretion. This will be based on order volumes and indent orders.

Please Note: Ag Attachments Limited reserve the right to hold the delivery of units when any of the above trading terms are not adhered to.



07 850 1990

PO Box 10232, Te Rapa, Hamilton 3241
34 Ingram Rd, Rukuhia, Hamilton, 3282 New Zealand



@AgAttachments

www.agattach.co.nz